

CROPLANDS

HORTICULTURE SPRAY RANGE




BUYERS' GUIDE • 2024

CROPLANDS.COM.AU

CROPLANDS IS COMMITTED TO A SUSTAINABLE FUTURE



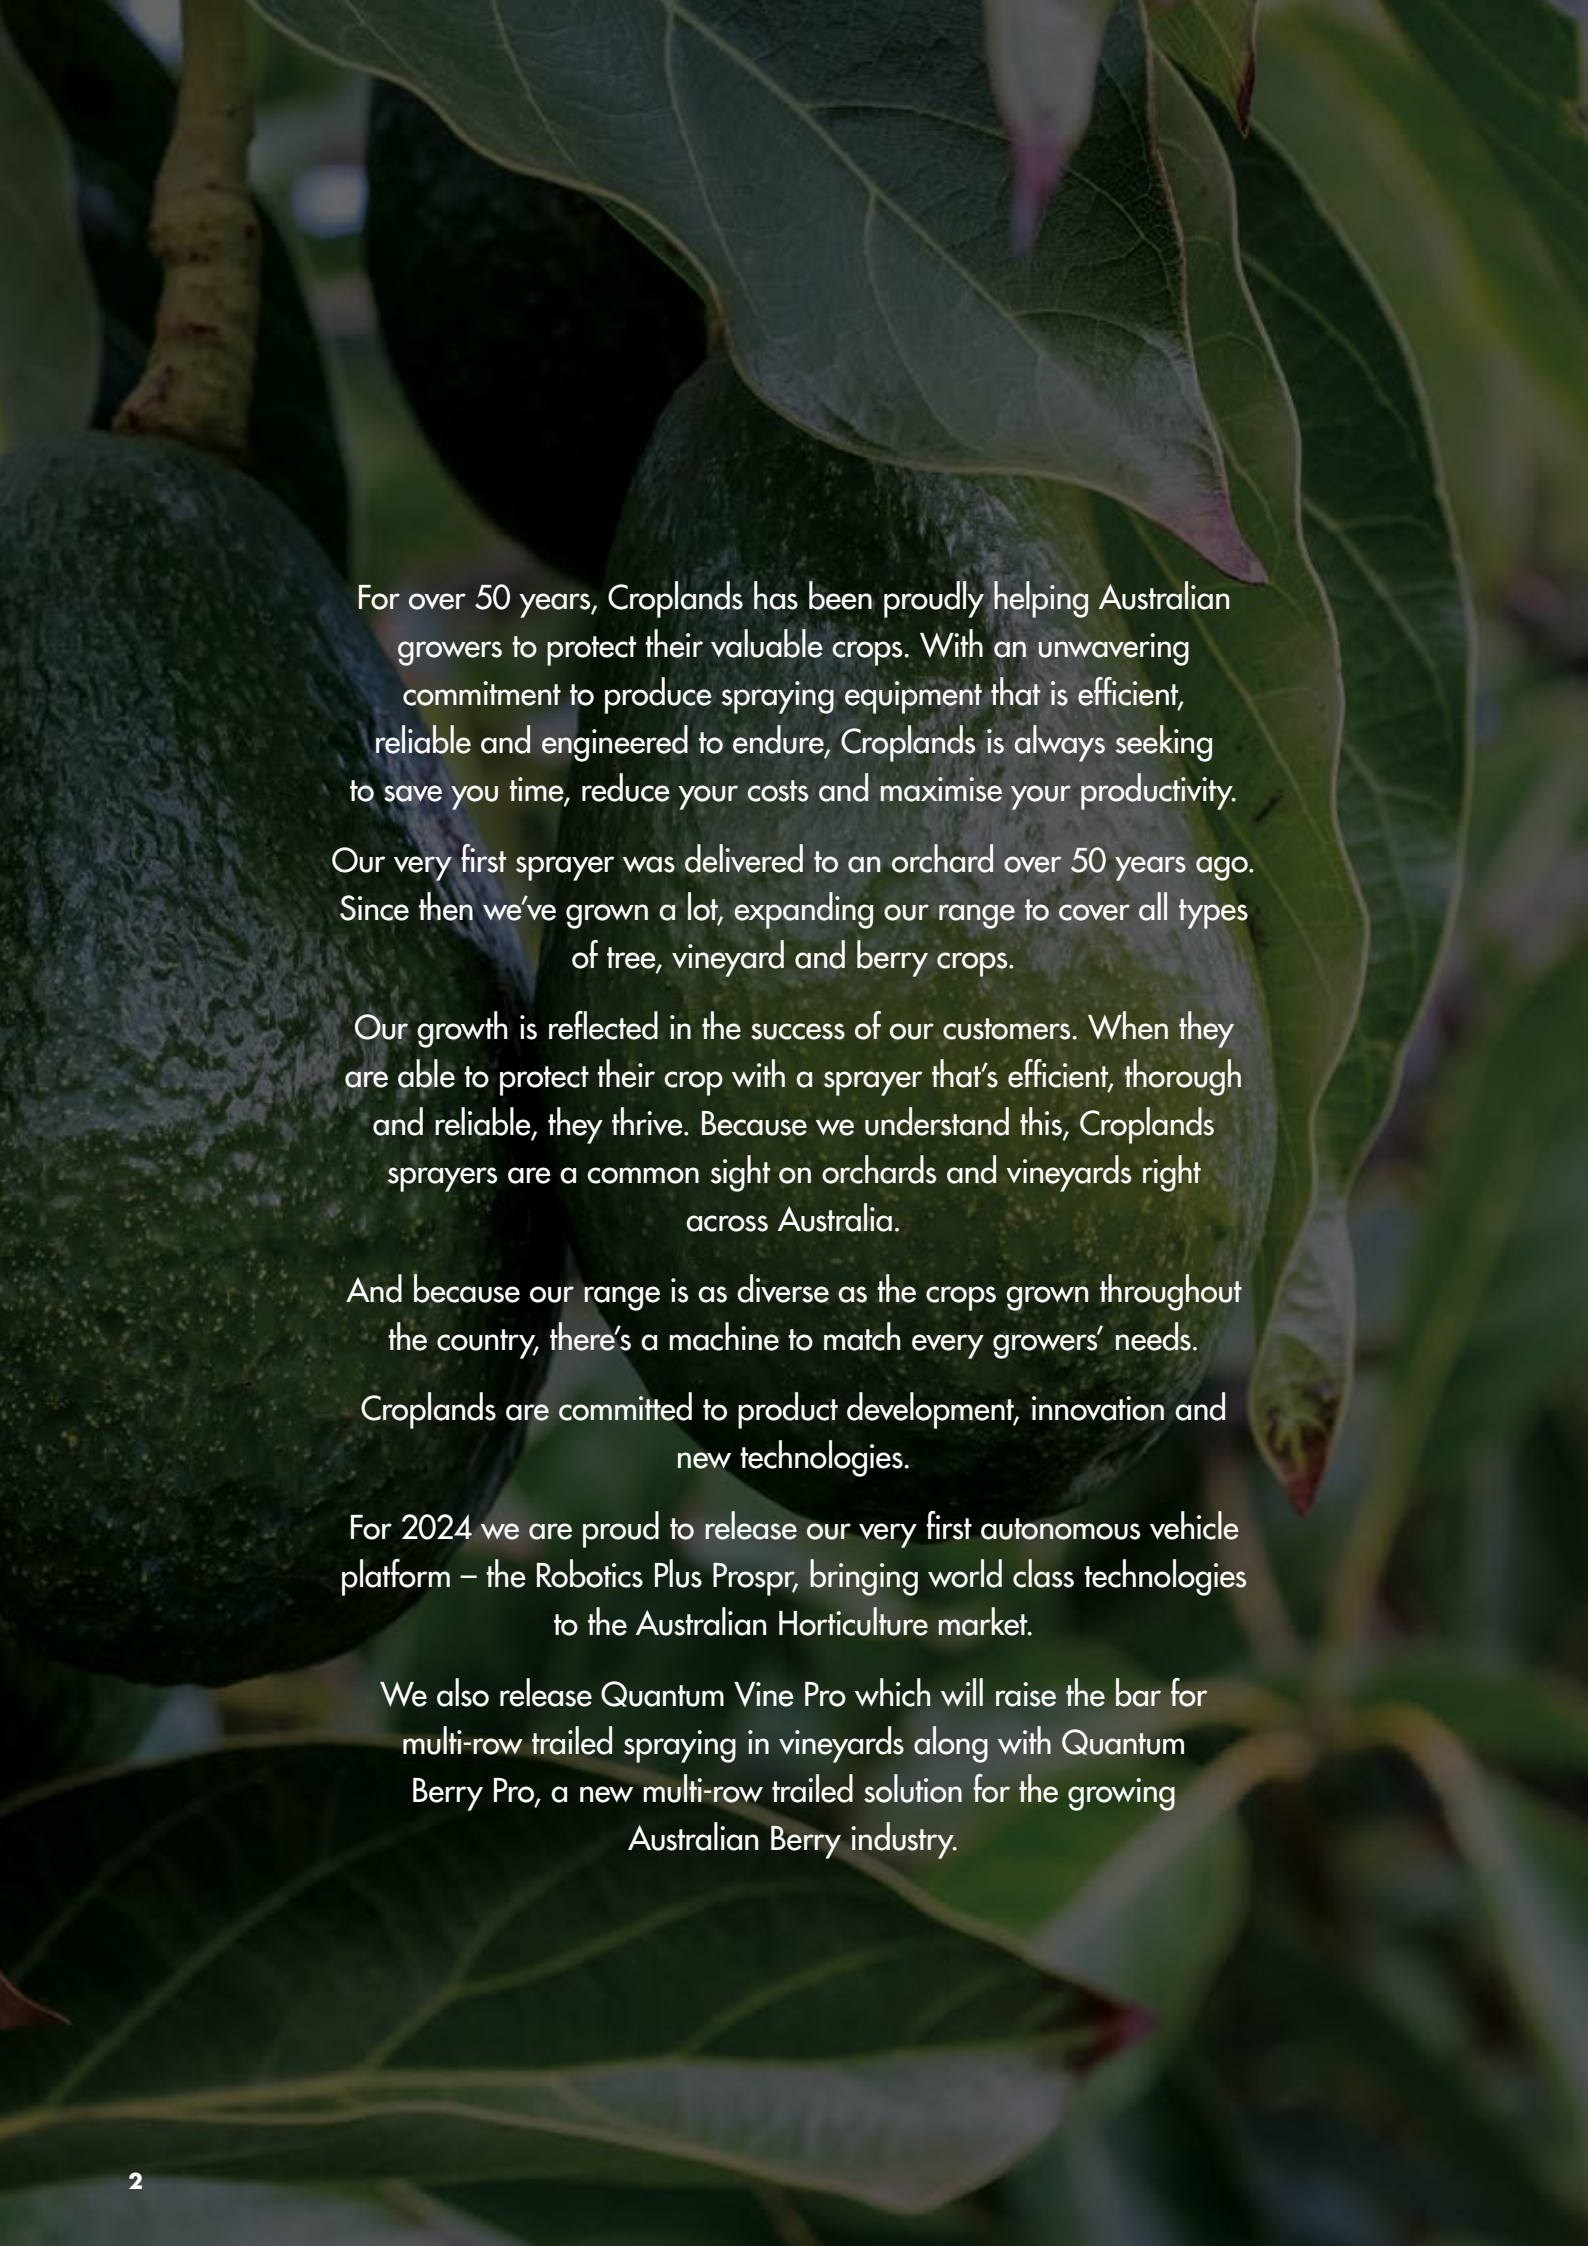

For over 50 years, Croplands has been proudly helping Australian growers to protect their valuable crops. With an unwavering commitment to produce spraying equipment that is efficient, reliable and engineered to endure, Croplands is always seeking to save you time, reduce your costs and maximise your productivity.

Our very first sprayer was delivered to an orchard over 50 years ago. Since then we've grown a lot, expanding our range to cover all types of tree, vineyard and berry crops.

Our growth is reflected in the success of our customers. When they are able to protect their crop with a sprayer that's efficient, thorough and reliable, they thrive. Because we understand this, Croplands sprayers are a common sight on orchards and vineyards right across Australia.

And because our range is as diverse as the crops grown throughout the country, there's a machine to match every growers' needs.

Croplands are committed to product development, innovation and new technologies.

For 2024 we are proud to release our very first autonomous vehicle platform – the Robotics Plus Prospr, bringing world class technologies to the Australian Horticulture market.

We also release Quantum Vine Pro which will raise the bar for multi-row trailed spraying in vineyards along with Quantum Berry Pro, a new multi-row trailed solution for the growing Australian Berry industry.

HORTICULTURE SPRAYERS

4 PROVEN COVERAGE AND TESTING

5 SPRAYER SELECTION GUIDE

6 ROBOTICS PLUS PROSPR

8 QUANTUM VINE PRO

10 QUANTUM SMART SPRAY

12 QUANTUM 420 2 AND 3-ROW

14 QUANTUM CLASSIC 500

16 QUANTUM SINGLE ROW

17 QUANTUM LINKAGE

18 QUANTUM ULTRA TOWER

20 QUANTUM ORCHARD TOWER

22 CROPLINER XV

23 CROPLINER XL

24 CROPLINER 2000 SLIMLINE

25 CROPLINER ROVER

26 CROPAIR LINKAGE AND TRAILED

27 CROPAIR SELF-PROPELLED

28 QUANTUM BERRY PRO

30 ORCHARD 4000

32 QUANTUM FANS

33 FEINI FANS

34 SPRAY CONTROLLERS

35 NOZZLES

36 NATIONWIDE DEALERS



THIS GUIDE IS PRINTED ON CARBON NEUTRAL PAPER.
FINSBURY GREEN PRINTED CARBON NEUTRAL.

PROVEN COVERAGE AND TESTING

The Croplands premium fan range delivers unparalleled coverage, performance, and reliability. This is backed by Australia's leading fruit growers as they continue to use our sprayers to protect their high-value crops.

When it comes to pest and disease in your orchard or vineyard, spray coverage and performance efficiency are key to your success.

All our air-blast fans are engineered by Fieni, a global leader in agricultural fan design, manufacturing and innovation.

Croplands and Fieni have been collaborating since 1972 and together we set a new standard for fan sprayer performance, efficiency, penetration, and coverage. And, with Fieni fans available from 615mm in diameter to 1060mm, there's a model to meet your orchard's needs.

Croplands Tower and Vineyard sprayers are fitted with Quantum hydraulic drive fans. Quantum Fans are available in 420mm and 500mm diameter models, allowing for multiple-head configurations to target crops more directly.

The Quantum fan design delivers excellent spray coverage at higher travel speeds, allowing growers to enjoy exceptional efficiency while reducing costs.

In addition to designing and building sprayers, we continually field test our sprayers to validate their performance.

We work with independent industry experts and are guided by their recommendations. These learnings improve sprayer set up and performance for our customers.

Whether it be our iconic Quantum 420 and 500 hydraulic drive fans or our Fieni air blast spray fans, a Croplands representative or qualified dealer will match the right model sprayer to your unique requirements.

Want more proof as to why Croplands fans are the best on the market?

Croplands dealers and sales staff love nothing more than demonstrating our market-leading fans and sprayers in the field – especially in conditions unique to you.

Contact your dealer now and let us show you that the proof is in the coverage.

Orchard sprayer selection guide

CROP TYPE	ULTRA TOWER	ORCHARD TOWER	CROPLINER XV	CROPLINER XL	SLIMLINE	ROVER SP	CROPAIR LINKAGE	CROPAIR SP	BERRY PRO	ORCHARD 4000
LARGE TREES										
AVOCADO	•		•	•						•
MACADAMIA										
MEDIUM / DENSE TREES	•		•	•						•
CITRUS AND ALMONDS										
MEDIUM TREES										
OLIVE, STONE AND PIP FRUIT		•	•	•	•	•				•
BUSH AND TRELLIS					•	•	•	•	•	

Vineyard sprayer selection guide

VINEYARD SIZE	ROBOTICS PLUS PROSPR	QUANTUM VINE PRO	QUANTUM SMART SPRAY	QM-420 MULTI-ROW	QM-500 CLASSIC M-R	QUANTUM SINGLE ROW	QUANTUM LINKAGE	CROPAIR SP
CORPORATE	•	•	•	•				
CONTRACTOR	•	•	•	•				
LARGE SCALE	•	•	•	•				
MEDIUM SCALE		•	•	•	•			
SMALL SCALE				•	•	•		
BOUTIQUE						•	•	•
ULTRA NARROW						•	•	•

ROBOTICS PLUS PROSPR



NEW for 2024, a robust, autonomous, multi-use hybrid vehicle platform that significantly increases efficiency across a variety of crop tasks.

With unique modular architecture, you can rotate multiple tools and attachments across a single vehicle depending on the work of the day.

Robotics Plus and Croplands have collaborated to design a range of spray configurations suitable for various crop types and growing systems.

Fans

QM-420 individual fans. Electrically driven with individual fan speed capability and individual spray rate distribution.

Dual spray ring fitted with 10 x Albus ATI-80 hollow cone nozzles per fan (refer page 35 for nozzle options).

Engine

Kohler Tier 4, 74 HP diesel engine

Drive

Independent electric 4-wd. 67 HP peak output with regenerative braking.

Run Time

Approx. 24 hours.

Speed

Spraying speed from 4-8 km/hr.
10 km/hr. Transport speed.

Tank

1500 litre polyethylene main tank.

Boom

Single row boom with multiple width adjustment.

Boom can be folded outwards for ease of service and adjustment.

Q4 Boom – suitable for cool climate / VSP wine grapes and berries.

Q6 Boom – suitable for warm climate / sprawl grapes.

Q8 Boom – suitable for 2-D apples and medium size tree crops.

Spray pumps

AR-160 (150 l/min, 20-Bar.) Electric drive pump.

Controls

Robotics Plus management and planning interface system with multi-vehicle remote (MVR) console for operator.

Manoeuvrability

Spot turning around centre of axle.

Min. headland for turning into adjacent row = 7.1 metres.

Max lateral slope up to 10 degrees. Max longitudinal slope up to 20 degrees.

Safety / Sensing

LiDAR coupled with cameras for intelligent detection and avoidance.

Front bumper detection.

QUANTUM VINE PRO

NEW for 2024, Quantum Vine Pro redefines the benchmark for larger scale trailed vineyard spraying. After years of market research, customer collaboration and testing, the Quantum Vine Pro is strong, agile and easy to operate.



Fans

Individual QM-420 hydraulically driven from the tractor hydraulics or via optional compact, self-contained Micro Power Pack.

8, 12 or 18 x fan configurations (refer page 32).

In-cab electric fan speed control with "Wind comp" feature as standard.

Dual spray ring fitted with 10 x Albus ATI-80 hollow cone nozzles per fan (refer page 35 for nozzle options).

Fan Frames

Fans are mounted in a protective frame allowing simple, precise fan position settings.

NEW heavy duty fan frame mounting with improved breakaway dampening.

Tanks

NEW 2500 and 3500 polyethylene main tanks improve Centre of Gravity.

300 litre flush and 15 litre fresh water (independent tanks).



Boom

NEW heavy duty mid-mount, 2 or 3-row over row parallelogram boom designed for row widths from 2.40 – 3.60 metres with auto boom width function.

NEW optional hydraulic adjustable inner / rear boom for more precise fan positioning in varying row widths with optional auto boom width function.

NEW optional hydraulic adjustable left / right inner and outer boom terracing kits.

Spray pumps

AR-185 or AR-250 depending on fan configuration.

Controls

Fusion controller system.

NEW ARAG IBX-100 ISOBUS controller system (refer page 34).

Chassis / axle / wheels

NEW full-length, heavy duty galvanised chassis and heavy duty 3-point self-steer drawbar.

NEW tandem walking beam axle in Narrow or wide track options.

11.5/80 x 15.3 AWT tyres fitted as standard. Flotation tyres optional.

QUANTUM SMART SP



RAY

Quantum Smart Spray is a premium model sprayer best suited to Corporates, contractors and large-scale owner growers. Available in 2 and 3-row configurations, the QM Smart Spray is packed with industry leading technology and innovation.

Fans

Individual QM-420 hydraulically driven from the tractor hydraulics or via optional compact, self-contained Micro Power Pack.

8, 12 or 18 x fan configurations. (refer page 32)

In-cab electric fan speed control with "Wind comp" feature as standard.

Dual spray ring fitted with 10 x Albuz ATI-80 hollow cone nozzles per fan (refer page 35 for nozzle options).

Fan frame

Fans are mounted in a protective frame allowing simple, precise fan position settings.

Boom

Heavy duty rear-mounted parallelogram boom designed for row widths from 2.50 – 3.75 metres with auto boom width function.

*Standard boom = 2.50 – 3.40

*Wide row boom = 2.85 – 3.75

Optional hydraulic adjustable left / right terracing kit.

Optional Drift reduction / Recapture system.

Recommended for use in 2-row, cool climate vineyards or early season spray applications.

*Requires AR-250 pump option.

Tanks

2000, 3000 and 4000 litre polyethylene tanks.

Spray pumps

AR-185 standard for 8 to 12 fan models.

AR-250 standard for 18 fan and recapture kit models.

Controls

Fusion controller system.

NEW ARAG IBX-100 ISOBUS controller system (refer page 34).

Chassis / axle / wheels

Full-length, hot dipped galvanised chassis with self-steer drawbar.

Heavy duty tandem walking beam axles.

11.5/80 x 15.3 AWT tyres fitted as standard.

Flotation tyres optional.

QUANTUM 420 2 AND 3-ROW

The Quantum 420 is a mid-spec multi-row sprayer model best suited to large Estate vineyards, and owner growers. Available in 2 and 3-row configurations, the QM-420 delivers market leading coverage and efficiency at an affordable price.





Fans

Individual QM-420 hydraulically driven from the tractor hydraulics or via optional compact, self-contained Micro Power Pack.

8, 12 or 18 x fan configurations. (refer page 32)

Manual fan speed control. In-cab electric fan speed control as option.

Dual spray ring fitted with 10 x Albuz ATI-80 hollow cone nozzles per fan (refer page 35 for nozzle options).

Fan frame

Fans are mounted in a protective frame allowing simple, precise fan position settings.

Boom

Quantum Classic boom with excellent adjustability for varying row widths.

Optional hydraulic adjustable left / right terracing kit.

Optional hydraulic adjustable left / right outer row width adjustment.

Optional wide row booms.

Tanks

2000, 3000 and 4000 litre polyethylene tanks.

Spray pumps

AR-185 or AR-250 depending on fan configuration.

Controls

Electric, 2 or 4-section control with in-cab pressure adjustment as standard.

Optional rate controller options (refer page 34).

Chassis / axle / wheels

Full-length, hot dipped galvanised chassis with self-steer drawbar.

Heavy duty tandem walking beam axles.

11.5/80 x 15.3 AWT tyres fitted as standard.

Flotation tyres optional.

QUANTUM CLASSIC 500 2 AND 3-ROW



The iconic Quantum Classic 500 multi-row sprayers have been spraying vineyards across Australia for over 20 years. The larger diameter QM-500 fan is best suited to warm climate sprawl canopies or for customers wanting a more basic, cost-effective sprayer solution.

Fans

Individual QM-500 hydraulically driven from the tractor hydraulics or via optional compact, self-contained Micro Power Pack.

8 or 12 x fan configurations (refer page 32).

Manual fan speed control. In-cab electric fan speed control as option.

Single spray ring fitted with 8 x Albus ATI-80 hollow cone nozzles per fan (refer page 35 for nozzle options).

Tanks

2000, 3000 and 4000 litre polyethylene tanks.

Spray pumps

AR-185 as standard, optional AR-250 for 3-row models.

Controls

Electric, 2 or 4-section control with in-cab pressure adjustment as standard.

Optional rate controller options (refer page 34).

Chassis / axle / wheels

Full-length, hot dipped galvanised chassis with self-steer drawbar.

Heavy duty tandem walking beam axles.

11.5/80 x 15.3 AWT tyres fitted as standard.

Flotation tyres optional.



QUANTUM SINGLE ROW

Perfect for smaller scale and Estate vineyards the Quantum single row sprayers are ideal where tight headlands or sloping topography is a challenge. Available in 4 x fan (cool climate) and 6 x fan (warm climate) configurations.

Fans

Individual QM-420 hydraulically driven from the tractor hydraulics.

4 or 6 fan configurations (refer page 32).

Manual fan speed control. In-cab electric fan speed control as option (*requires rate controller option).

Fan frame

1500-3000 models have fans mounted in a protective frame allowing simple, precise fan position settings.

Boom

1500-3000 models fitted with h-duty rear tower manually adjustable for varying row widths.

1000 model fitted with single pole tower with adjustable fan clamping brackets.

Tanks

1000, 1500, 2000 and 3000 litre polyethylene tanks.

Spray pumps

1500-3000 AR140 as standard.

Optional AR-185 for higher volume applications.

1000 model fitted with AR-80 as standard.

Nozzles

Dual spray ring fitted with 10 x Albus ATI-80 hollow cone nozzles per fan (refer page 35 for nozzle options).



Controls

1500-3000 models fitted with Electric, 2-section control with in-cab pressure adjustment as standard.

Optional rate controller options (refer page 34).

1000 litre model fitted with remote mount manual controller.

Electric, 2-section control with in-cab pressure adjustment as option.

Chassis / axle / wheels

Full-length, hot dipped galvanised chassis with self-steer drawbar.

1500-3000 models fitted with single fixed axle as standard. Single suspension axles optional.

1000 model fitted with single adjustable width axle.

QUANTUM LINKAGE

Perfect for small scale and boutique vineyards the Quantum linkage sprayers excel in narrow row spacings, tight headlands or where sloping topography is a challenge. A great solution for smaller frame tractors.

Fans

Individual QM-420 hydraulically driven from the tractor hydraulics.

4 fan configuration (refer page 32).

Manual fan speed control. In-cab electric fan speed control as option (requires rate controller option).

Dual spray ring fitted with 10 x Albus ATI-80 hollow cone nozzles per fan (refer page 35 for nozzle options).

Fan frame

Fans mounted in a protective frame allowing simple, precise fan position settings.

Boom

Heavy duty rear tower manually adjustable for varying row widths.

Tanks

600, 800, 1000 litre polyethylene tanks.

Separate flushing and freshwater tanks.

Spray pumps

AR-80 as standard.

Optional AR-140 for higher volume applications.

Controls

Remote mount, 5 x outlet, UCM manual controller with manual pressure adjustment and pressure gauge.

Electric, 2-section control with in-cab pressure adjustment as option.

Optional rate controller options (refer page 34).

Frame

Heavy duty, hot dipped galvanised frame.

QUANTUM ULTRA TOWER

The Quantum Ultra Tower provides superior coverage in tall tree crops at a faster ground speed. Increasing yield and quality, saving time whilst reducing fuel costs, the Ultra Tower is the perfect solution for sustainable tree crop spraying.





Fans

Individual QM-500 fans hydraulically driven from the independent Micro Power Pack fully enclosed oil supply system.

8 or 10 fan configurations (refer page 32).

Manual fan speed control. In-cab electric fan speed control as option.

Single spray ring fitted with 8 x ATI-80-degree hollow cone nozzles per fan (refer page 35 for nozzle options).

Tanks

4000 and 5000 litre polyethylene tanks.

Tower

Heavy duty, and innovative tower design to reach tall tree crops.

Hydraulic fold for transport and storage.

Optional hydraulic width adjust for varying row widths.

Spray pumps

Dual pump assembly (AR-250 and AR-185).

Primary pump for spray application, secondary pump for agitation.

High volume pump (AR-410) as option.

Controls

Bravo 180-S 4-section auto rate controller.

Optional ARAG IBX-100 ISOBUS controller (refer page 34 for controller options).

Chassis / axle / wheels

Full-length, hot dipped galvanised chassis with self-steer drawbar.

Single axle with suspension fitted with 400 x 22.5-inch flotation tyres.

Heavy duty tandem walking beam axles as option.

QUANTUM ORCHARD TOWER

NEW for 2024, the Quantum Orchard Tower has been specifically designed for medium size tree crops and 2-D growing systems up to 5 x metres in height.

Fitted with QM-420 fans the Quantum Orchard Tower achieves precise, even coverage across the entire tree structure, whilst minimising off target drift.

Fans

Individual QM-420 fans hydraulically driven from the tractor or optional independent Micro Power Pack fully enclosed oil supply system.

8 x fan configuration (refer page 32).

Manual fan speed control. In-cab electric fan speed control as option.

Dual spray ring fitted with 10 x Albuz ATI-80 hollow cone nozzles per fan (refer page 35 for nozzle options).

Fan frame

Fans mounted in a protective frame allowing simple, precise fan position settings.

Tanks

2000 Slimline, 2000 XL, 3000 XL and 4000 XL litre polyethylene tanks.

Tower

New fixed tower designed specifically for orchard crops. Manual width adjust for varying row widths.

Spray pumps

AR-185 pump as standard.

High volume pump (AR-250) as option.

Controls

Bravo 180-S 2-section auto rate controller as standard.

Optional ARAG IBX-100 ISOBUS controller.

Controllers can be upgraded to 4 x section plumbing as option (refer page 34 for controller specs).

Chassis / axle / wheels

Full-length, hot dipped galvanised chassis with self-steer drawbar.

Single fixed axles on XL models. Suspension or tandem axle options.

Single adjustable axle on 2000 Slimline model. 1400 mm overall width in narrow setting.



CROPLINER XV



Cropliner XV delivers increased tank capacity and is fitted with the industry leading Fieni 1060 DSV fan. Suited for dense and tall tree crops up to 8 metres in height, the Cropliner XV achieves industry leading air-blast sprayer coverage and efficiency.

Fan

Highly efficient Fieni DSV fans are designed to generate more air with lower HP.

Fieni 1060 DSV fan (refer page 33 for detailed specs).

Spray pumps

High pressure (50 Bar) AR BHS-200 pump as standard.

High volume pump (IDS-260) as option.

Controls

Electric, 2-section control with in-cab pressure adjustment as standard.

Optional rate controller options (refer page 34).

Tank

5000 litre polyethylene tank.

Nozzles

15 x brass roll-over nozzle bodies per side (30 x nozzles total).

30 x Albus ATI-80 degree ISO hollow cone nozzles.

30 x Albus ceramic disc and cores (refer page 35 for nozzle options).

Chassis/Axle

Full-length, hot dipped galvanised chassis with heavy duty rear leaf guard / protection plate.

Fixed drawbar, adjustable for length.

Single axle suspension as standard. Tandem walking beam axle optional.

Power required

Approx. 105 engine HP for operation in normal / flat conditions (based on operating fan in mid pitch setting – refer page 33).

CROPLINER XL



**The perfect solution for operations of all sizes.
Multiple tank and fan size combinations can be perfectly
matched to your tractor HP and budget requirements.**

Fans

Highly efficient Fieni DSV fans are designed to generate more air with lower HP.

Fieni 920 DSV.

Fieni 920 DSV LT (Linear Tower).

Fieni 1060 DSV fan (refer page 33 for detailed specs).

Spray pumps

AR BHA-140 alloy pump standard for 1500 model.

AR BHS-170 brass pump standard for 2000, 3000 and 4000 models.

High volume brass pump (AR BHS-200) as option.

Controls

Electric, 2-section control with in-cab pressure adjustment as standard.

Optional rate controller options (refer page 34).

Tank

1500, 2000 XL, 3000 XL and 4000 XL polyethylene tanks.

Nozzles

Brass roll-over nozzle bodies fitted with Albus AT1-80 degree ISO hollow cone nozzles and Albus ceramic disc and cores.

920 LT fitted with 9 x nozzles per side (18 x in total).

920 DSV fitted with 14 x nozzles per side (28 x in total).

1060 DSV fitted with 15 x nozzles per side (30 x in total) (refer page 35 for nozzle options).

Chassis/Axle

Full-length, hot dipped galvanised chassis with rear leaf guard / protection plate. Fixed drawbar, adjustable for length. Single fixed axles as standard, single axle suspension as option. Tandem walking beam axles optional.

Power required

1060 DSV approx. 105 engine HP.

920 DSV and 920 DSV LT approx. 70 engine HP.

*Based on normal / flat conditions with fan operating in the mid pitch setting (refer page 33).

CROPLINER 2000 SLIMLINE

Designed to suit narrow or high density tree crop plantings, the Cropliner Slimline has been shaped for minimum crop interference.

Fan

Highly efficient FIENI 920 DSV fan designed to generate more air with lower HP (refer page 33 for detailed specs).

Spray pumps

AR BHS-170 brass pump as standard.

High volume brass pump (AR BHS-200) as option.

Controls

Electric, 2-section control with in-cab pressure adjustment as standard.

Optional rate controller options (refer page 34).

Tank

2000 litre low profile polyethylene tank can be narrowed to 1400 mm overall width.

Nozzles

Brass roll-over nozzle bodies fitted with Albus ATI-80 degree ISO hollow cone nozzles and Albus ceramic disc and cores.

920 DSV fitted with 14 x nozzles per side (28 x in total) (refer page 35 for nozzle options).

Chassis/Axle

Full-length, hot dipped galvanised chassis with rear leaf guard / protection plate.

Fixed drawbar, adjustable for length.

Single fixed axles as standard.

Power required

920 DSV approx. 70 engine HP.

*Based on normal / flat conditions with fan operating in the mid pitch setting – refer page 33.



CROPLINER ROVER



The lowest profile and most agile self-propelled sprayer on the market.

The Rover 2000 sprays under trellis crops and in very dense orchards where traditional tractor and sprayer combinations are not suited.

Fan

Highly efficient Fieni 820 DSV front entry fan designed to generate more air with lower HP.

The front entry design eliminates trash build up on the intake grill (refer page 33 for detailed specs).

Spray pumps

AR BHS-170 brass pump as standard.

High volume brass pump (AR BHS-200) as option.

Controls

HV-2400 auto rate controller as standard.

Optional rate controller options (refer page 34).

Nozzles

Brass roll-over nozzle bodies fitted with Albuz ATI-80 degree ISO hollow cone nozzles and Albuz ceramic disc and cores. 820 DSV FE fitted with 14 x nozzles per side (28 x in total) (refer page 35 for nozzle options).

Tank

2000 litre low profile fibreglass tank.

Cab

Fully sealed air-conditioned cab with chemical filters supplied.

Easy navigation with reversing camera and LCD display.

Engine

Daedong Tier 4, 85 HP diesel engine.

Transmission

Mechanical drive, 5 x speed manual with high / low range.

1-24 km / hr speed range. Single speed reverse.

Selectable 2 or 4-wd and 2 or 4-wheel steer.

Four wheel disc brakes.

CROPAIR 300, 600 & 1000



Cropair 300L



Cropair 600L



Cropair 1000L



The Cropair Linkage and trailed range of sprayers are high quality yet cost effective, perfect for smaller growers and lifestyle farmers.

Fan

Highly efficient Fieni fans designed to generate more air with lower HP.

300 model fitted with Fieni 615, single speed fan and adjustable pitch blades.

600 model fitted with Fieni 815, two-speed fan with adjustable pitch blades.

1000 model fitted with Fieni 815, two-speed fan with neutral position and adjustable pitch blades.

Spray pumps

300 and 600 models fitted with AR-503 (54 l/min / 40-Bar) pump.

1000 model fitted with AR-1064 (105 l/min / 50-Bar) pump.

Controls

Remote mount 2-outlet manual controller with manual regulating valve and pressure gauge.

Electric, 2-section control with in-cab pressure adjustment as option.

Optional rate controller options (refer page 34).

Nozzles

Brass roll-over nozzle bodies fitted with Albus ATI-80 degree ISO hollow cone nozzles and Albus ceramic disc and cores.

300 model fitted with 5 x brass roll over nozzle bodies per side (10 x nozzles in total).

600 and 1000 models fitted with 7 x brass roll over nozzle bodies per side (14 x nozzles in total) (refer page 35 for nozzle options.)

Tank

300, 600 and 1000 litre polyethylene tanks.

Independent flush tank and freshwater tank.

Frame

Heavy duty, hot dipped galvanised frame.

CROPAIR SELF PROPELLED



NEW for 2024, the Cropair Self propelled model sprayers are designed for spraying intensively planted crops including ultra narrow vineyards, orchards, berry tunnels, green houses and nurseries.

Fans

Highly efficient Fieni fans designed to generate more air with lower HP.

Fieni 400 mm standard fan fitted with 8 x blades.

Fieni 400 mm Linear Tower fan fitted with 8 x blades.

Spray pumps

AR-403 (40 l/min / 40-Bar) pump.

Controls

Remote mount 3-outlet manual controller with manual regulating valve and pressure gauge.

Tank

200 litre polyethylene tanks.

Transmission

Hydrostatic transmission with foot pedal directional control.

Frame

Self-supporting steel tubular frame, powder coated finish.

Engine

Honda OHV GX-390, 4-stroke petrol 13.5 HP engine. Electric start.

Nozzles

Brass roll-over nozzle bodies fitted with Albusz ATI-80 degree ISO hollow cone nozzles and Albusz ceramic disc and cores.

400 Standard fan fitted with 5 x brass roll over nozzle bodies per side (10 x nozzles in total).

400 Linear Tower fan fitted with 6 x brass roll over nozzle bodies per side (12 x nozzles in total) (refer page 35 for nozzle options).

QUANTUM BERRY PRO



NEW for 2024, Quantum Berry Pro has been designed specifically for raised tabletop crops primarily grown in tunnels. Spraying 6 x beds in a single pass Berry Pro has full adjustability for premium crop protection.

Fans

Individual QM-420 fans hydraulically driven from the compact, self-contained Micro Power Pack.

8 x fan configuration. 3 x fans per side spraying down onto crop, 1 x fan per side spraying up under crop (refer page 32).

Manual fan speed control. In-cab electric fan speed control as option.

Dual spray ring fitted with 10 x Albuz ATI-80 hollow cone nozzles per fan (refer page 35 for nozzle options).

Boom

New rear mounted, front folding boom with max. working width of 8 x metres.

Individual left / right hydraulic boom fold.

Hydraulic adjustable left / right terracing kit as standard.

Tanks

2000 Slimline polyethylene tank.

Spray pumps

AR-185 LFP pump.

Controls

Bravo-180S 4-section rate controller as standard.

Optional rate controller options (refer page 34).

Chassis / axle / wheels

Full-length, hot dipped galvanised chassis with self-steer drawbar.

Single fixed axles as standard.

10.0/75 x 15.3 AWT tyres fitted as standard.



ORCHARD 4000 2-ROW TRAILED HERBICIDE

Either as a traditional herbicide system or using Weed-IT detection sensors for optical spot spraying, the Orchard 4000 delivers unprecedented efficiency whilst reducing chemical costs and combatting herbicide resistance in large scale orchards.

Tanks

4000 polyethylene tank.

Booms

New heavy duty poly boom shrouds for maximum crop protection.

Safety breakaway fitted to all booms.

Front booms – hydraulic height adjust.

Manual width adjust, hydraulic folding for transport.

Rear booms – fixed height, manual folding for transport.

Boom tubes and nozzles

½ inch stainless steel boom tubes.

Front boom nozzle spacings = 25cm, rear boom nozzle spacings = 50cm.

Non-drip quick release single nozzle bodies fitted with Agro-top Air induction 110 degree nozzles. Double OC fence line nozzles.

Spray pumps

ACE 155 Series hydraulic drive centrifugal pump compatible to all tractor hydraulic systems.

**Controls**

Bravo-180S 3-section rate controller as standard.
Optional rate controller options (refer page 34).

Chassis / axle / wheels

Hot dipped galvanised full-length chassis with adjustable draw bar and single step.
Single fixed axle as standard.
400 x 15.5-inch flotation tyres as standard.

Optional Weed-IT kit components

Weed-IT Quadro detection sensors x 4 (for spraying out mid row).
PWM solenoids (4 x per sensor).
Power converter.
Weed-IT user console.

QUANTUM FANS



QM-420

The Quantum 420mm-diameter fan, with a new cowl design, is highly efficient, delivering greater RPM with a lower power requirement.

It produces turbulent and high-volume air for optimum vine and tree canopy penetration and spray coverage. It is used in 2, 3 and 4 (per row) configurations.

Dual spray rings are fitted with a total of 10 x nozzles per fan. 5 x nozzles are fitted to the inner or lower volume spray ring with an additional 5 x nozzles fitted to the outer or higher volume spray ring.

This allows for 3 x tier spraying (low/medium/high) rate application without the need to change nozzles.

QM-500

Designed in collaboration with SARDI, the QM-500 fan has set the benchmark in horticulture spray coverage since its release.

This iconic 500mm-diameter fan produces a wider band of air best suited to large and medium tree crops and vineyards with warm climate sprawl canopies.

A roto-moulded, fully integrated cowl is lightweight and impact resistant.

A single spray ring is fitted with 8 x nozzles per fan.

TECHNICAL INFORMATION

FIENI FAN PERFORMANCE


	815 VPL FAN	820 DSV FRONT ENTRY (FE) FAN	920 LINEAR TOWER (LT) FAN	920 DSV FAN	1060 DSV FAN
ORDER CODE	KH-5026	KH-5023	KH-5037	KH-5035	1060 DSV FAN

9-BLADE FAN




Fan blade diameter mm	815	815	913	913	1,060
Standard RPM (PTO 540)	1,780	1,780	1,780	1,780	1,780

OUTPUT AND POWER




Pitch	34°	26°	26°	26°	64°
M3/HR	31,948	52,955	73,682	73,682	84,696
HP	17.5	22.7	26.4	26.4	40
Pitch	42°	34°	34°	34°	72°
m3/hr	36,800	57,933	81,285	81,285	99,929
HP	27	29.2	36.9	36.9	55.5
Pitch	50°	42°	42°	42°	80°
M3/HR	39,200	53,860	83,798	83,798	108,618
HP	35.4	32.3	47.5	47.5	72

GEARBOX



2-speed plus neutral	2 + N	2 + N	2 + N	2 + N	2 + N
Low box ratio	1:3:50	1:2:93	1:2:93	1:2:93	1:2:93
High box	1:4:00	1:3:29	1:3:29	1:3:29	1:3:30

**PERFORMANCE*
(*in ideal conditions)**



Y = metres	5	5	6	6	9
Z = metres	10	10	13	13	16
Suitable tank size	800 - 1000	800 - 2000	1500 - 4000	1500 - 4000	3000 - 5000
Recommended tractor HP	45	≥50	65	≥65	≥105
Nozzles per side	7 + 7 (14)	14 + 14 (28)	9 + 9 (18)	14 + 14 (28)	15 + 15 (30)
Noise rating (dB)	99.5	89.5	92	92	96
Fan weight	88	110	178	130	188

The maximum canopy height and width figures are entirely subject to the canopy density, size, shape and weather conditions.

SPRAY CONTROLLERS

HV2400

For customers looking for a basic spray rate controller.

2 or 4-section solenoid control suitable for Croplands air-blast model sprayers.

L/ha and L/100m capability with up to 10 pre-set jobs (rates and row widths).



BRAVO 180S

For customers wanting a mid-range spray rate controller with more capability.

Up to 4-section control of motor valves or solenoids.

L/ha and L/100m capability with up to 10 pre-set jobs.

1 x RPM sensor input and fan speed control capable.



IBX 100 ISOBUS

For the progressive customer operating an ISOBUS compatible tractor or transitioning into ISOBUS compatible machinery.

*If not using an ISOBUS tractor a Virtual Terminal (Display screen will be required).

Up to 8-section control valves with 9 x hydraulic functions.

L/ha and L/100m capability with up to 24 pre-set jobs.

Advanced capability to monitor and operate all advanced sprayer functions.

Optional joystick control, optional section control (requires GPS receiver).

TOPCON ISOBUS

(and Mapping package.)

For the progressive customer wanting ISOBUS without a compatible tractor.

This package utilises all the functionality of the IBX-100 ISOBUS rate controller with the addition of coverage mapping and section control.

Topcon XD 7-inch colour touch screen as virtual terminal.

*Can be upgraded to 12-inch.

ISOBUS module and required looms.

GPS receiver.



FUSION controller platform

Exclusive to Croplands the Fusion controller has been designed specifically for Viticulture.

Includes 7-inch colour touch screen and integrated deluxe joystick control.

CANBUS system with in-built diagnostics and software upgradeable for future functionality.

Up to 18-section control with 8 x hydraulic functions.

L/ha and L/100m capability with up to 3 jobs.

Advanced capability to monitor and operate all advanced sprayer functions.



NOZZLES

Croplands is the exclusive distributor for Albus nozzles. At Croplands we continue to test different nozzle types to ensure your sprayer has the best suitable nozzle to maximise coverage and minimise off target drift.

ALBUZ ATI-40, 60 and 80

New for 2024 – ATI's are ISO colour coded in accordance with International flow rate standard colour coding.

Hollow cone nozzle available in 40, 60 or 80-degree spray angle.

Pressure range between 5-25 Bar. Recommended pressure at 10-Bar.

Fine to very fine droplet spectrum.

Ideal for fungicides and insecticides for tree, vine and trellis crops.



ALBUZ ATR-60 and 80

These nozzles have the same specifications as above but are NOT colour coded to ISO flow rate standards.



ALBUZ TVI-80

ISO colour coded in accordance with International flow rate standard colour coding.

Air-induction hollow cone nozzle with venturi system.

Available in 80-degree spray angle.

Pressure range between 3-20 Bar. Recommended pressure at 10-Bar.

Coarse to Ultra Coarse droplet spectrum for maximum drift control.

Ideal for fungicides and insecticides in densely vegetated tree, vine and trellis crops.



ALBUZ ATF-60 and 80

Full cone nozzle available in 60 and 80-degree spray angle.

Pressure range between 3-20 Bar. Recommended pressure at 10-Bar.

Fine to Very Fine droplet spectrum.

Ideal for fungicides and insecticides in densely vegetated tree, vine and trellis crops.



Disc and core ceramic hollow cone

Hollow or Full cone nozzle options.

Pressure range between 3-20 Bar. Recommended pressure at 10-Bar.

Spray angles from 20-degrees to 105-degrees.

Very Fine to Fine droplet spectrum

The combinations of discs and cores allow a wide choice of uses and applications.



NATIONWIDE DEALERS

NEW SOUTH WALES

Albury	Intersales	02 6977 1933
Bathurst	On-Trac Ag	02 6332 5655
Cowra	Cowra Machinery Centre	02 6342 5555
Forbes	Forbes Machinery Centre	02 6852 3211
Grafton	Leslie Farm & Garden Machinery	02 6642 3599
Griffith	Intersales	02 6962 6831
Gunnedah	NFS AG	02 6742 7771
Gunnedah	Vantage NSW	1300 770 970
Hunter Valley	Vintage Property Services	0414 018 535
Lismore	Days Machinery	02 6622 0003
Mudgee	On-Trac Ag	02 6372 2662
Orange	On-Trac Ag	02 6362 5566
Wagga Wagga	Intersales	02 6921 5515
Woolgoolga	Days Farm Machinery	02 6654 1753

QUEENSLAND

Atherton	Tableland Pumps, Pipes & Rural	07 4091 2277
Ayr	Nutrien	07 4790 4444
Bowen	EE Muir & Sons	07 4785 2322
Bundaberg	Sunfam Pty Ltd	07 4152 4166
Galton	Lockyer Farm Machinery	07 5462 1888
Innisfail	GF Rural Supplies	07 4061 1066
Murgon	Cheshire Machinery	07 4168 1411
Nambour	Tractor Machinery Implements	07 5476 4888
Toowoomba	Toowoomba Spray Shop	07 4634 4000
Rockhampton	Milne Bros. Equipment	07 4930 0333
Stanthorpe	Vedelago Mechanical Repairs	07 4685 2200
Tully	GF Rural Supplies	07 4068 1002

NORTHERN TERRITORY

Rob Graham	Coastal QLD/NT Territory Manager	0409 597 462
Darwin	HD Pumps	08 8947 1008
Humpty Doo	HD Pumps	08 8988 1254

TASMANIA

Statewide	Tasmac	1800 682 276
-----------	--------	--------------

SOUTH AUSTRALIA

Adelaide	Kubpower	08 8139 7200
Berri	Ag Mec Solutions*	0408 593 297
Loxton	Ronco Motors	08 8584 5575
McLaren Vale	Pridham Viticulture	0414 600 342
Naracoorte	Kubpower	08 8762 0123
Nuriootpa	Vater Machinery	08 8563 2008
Saddleworth	Vater Machinery	08 8847 5000
Strathalbyn	Bates Farm Machinery	0417 363 555
Summertown	Kubpower	08 8390 3017

VICTORIA

Ballarat	Central Machinery Services	03 5332 0566
Bendigo	Precision Control	03 5448 8484
Cobram	Cobram Rural	03 5871 3333
Colac	Swayn & McCabe	03 5231 5022
Echuca	Echuca Rural	03 5482 2788
Lilydale	Agpower	03 9739 5006
Mildura	Grower's Services	03 5023 0284
Shepparton	Shepparton Rural	03 5832 3500
St Arnaud	Sprayer Centre	03 5495 3222
Swan Hill	Grower's Services	03 5032 9290
Wangaratta	McGregor Machinery	03 5722 9933
Wodonga	Intersales	02 6061 4390

WESTERN AUSTRALIA

Albany	AFGRI	08 9842 8529
Boyup Brook	AFGRI	08 9765 1305
Busselton	AFGRI	08 9757 6215
Carnarvon	Carnarvon Tractors	08 9941 3622
Cowaramup	Cowaramup Tractor Sales	08 9755 5207
Donnybrook	Machinery West	08 9731 0700
Forrestdale	Growers Agrishop	08 9397 2800
Geraldton	AFGRI	08 9921 5044
Manjimup	Southern Forest Machinery	08 9777 2100
Moora	AFGRI	08 9651 1363
Muchea	CD Tractor Sales Service	08 9571 4117
Perth	AFGRI	08 9277 1140
Perth	Sprayline Spraying Equipment	08 9250 6100
Wangara	Boya Equipment	08 9409 2008

NATIONAL SALES & SUPPORT

CROPLANDS AUSTRALIA

Freecall	1800 999 162
Technical Service	1300 650 724
	sales@croplands.com.au
	facebook.com/Croplands
	twitter.com/Croplands

NATIONAL SALES MANAGER

Jeremy Rennick	0409 065 994
----------------	--------------

NORTH

COASTAL QLD/NT

Rob Graham	0409 597 462
------------	--------------

CENTRAL NSW & TAS

Dave Farmer	0427 651 971
-------------	--------------

SOUTH

SOUTH NSW

David Hamilton	0427 975 072
----------------	--------------

VIC / SA

Jeremy Deck	0430 006 672
Andrew Germein	0417 848 590

WEST

WA

Gavin Merritt	0448 022 172
Mitchell Cox	0407 132 746
Scot Craig	0448 337 280

* Service Agent only