


Static Automatic Transfer Switch (STS)

Features:

- Powered by two separately independent power sources
- Dual power supply for redundancy
- Provides seamless power switch for IT equipment
- Preferred source selection on front panel
- Highly reliability 19" rack design (1U) to fit into a diverse working environment
- Built-in intelligent slot for SNMP or Modbus
- Built-in USB and RS-232 communications



System Configuration:

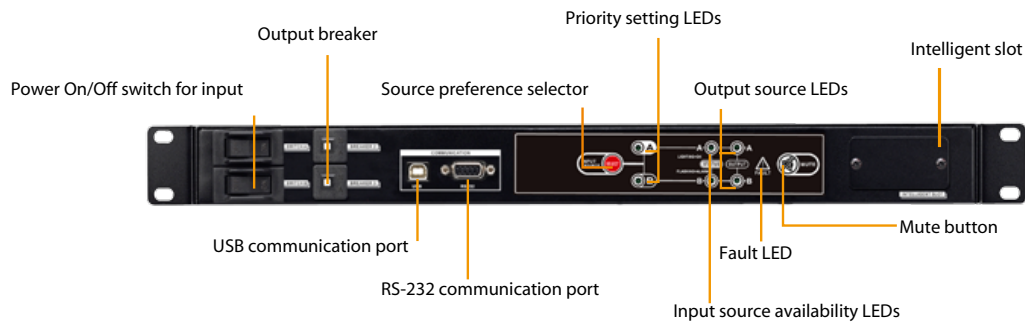

Static Transfer Switch Specification

MODEL	ISTSII-16	ISTSII-30
TOPOLOGY	Relay	Relay+SCR
INPUT		
Input Voltage	220/230/240 VAC	
Acceptable Input Voltage	180 - 258 VAC	
Input Frequency	50 Hz / 60 Hz	
Maximum Input Current	16 A	30 A
OUTPUT		
Output Voltage	220/230/240 VAC	
Maximum Output Current	10 A for IEC-C13 outlets 16 A for IEC-C19 outlet	10 A for IEC-C13 outlets 16 A for IEC-C19 outlet 30A for cable gland
CONNECTION		
Input	2 x IEC-C20 inlets	2 x cable gland
Output	8 x IEC-C13 1 x IEC-C19	4 x IEC-C13 1 x IEC-C19 1 x cable gland
Communication	USB/RS-232	USB/RS-232
Transfer time	< 3m sec	
PHYSICAL		
Dimension, D x W x H (mm)	330 x 430 x 44	
Net Weight (kgs)	5	4.5
Net Weight (including accessories) (kgs)	8	7.5
ENVIRONMENT		
Operating Temperature	0-95 % RH @ -5°C- 45°C (non-condensing)	

Best Power Equipments India Pvt. Ltd.

Corporate Office: G-240, Sector-63, Distt. Gautam Buddh Nagar, Noida-201307 UP
 Registered Office: 812A, Shakuntala Building, 59, Nehru Place, New Delhi-110019
 PH: +91 120 4637000-0029 | Mobile: +91 9311995859 | Email: crm@bpe.co.in
 support@bpeindia.com | Toll Free: 1800 103 1247 | Website: www.bpee.com