

SCL3 Series - Solar Street & Area Light

The SCL3 Series solar LED street and area light is the perfect solution for a wide range of public and commercial lighting applications including streets, pathways and parking lots.

With FLT's exclusive Adaptive Intelligence, the SCL3 provides dependable illumination throughout the night, regardless of weather conditions or geographic location. The SCL3 combines cutting-edge solar and battery technologies with robust construction to deliver exceptional performance and reliability. With no need for trenching or electrical wiring, the SCL3 offers a seamless, cost-effective, and eco-friendly alternative to traditional lighting systems.

Features and Benefits

- No wiring, trenching, or electrical service required
- Integrated design eliminates visually distracting external solar panels
- Cost-effective design ships fully assembled and installs in minutes
- No ongoing maintenance
- Provides programmed illumination all night, every night
- Wireless control & communication with your light

Key Applications

- Streets, Pathways, Parking Lots, and Area Lighting





Technical Specifications

Solar Module	<ul style="list-style-type: none"> • Industry's most efficient solar panel technology • Integrated into the top of luminaire • Active cell technology optimizes power generation even when partially blocked 	FLT's Exclusive Controller with Adaptive Intelligence	<ul style="list-style-type: none"> • Ensures all-night every-night performance by intelligently managing lighting based on environmental conditions and lighting requirements • Smart dusk/dawn detection synchronizes lights across installation using astronomical calculations • Automatically detects its timezone and sets its time for time-of-night profiles • High-efficiency, Maximum Power Point Tracking (MPPT) battery charger • High-efficiency integrated LED driver • On-board multi-year data logging
Battery	<ul style="list-style-type: none"> • High performance Lithium Iron Phosphate (LiFePO4) • Exceptional 10+ year life • High and low temperature tolerance • Integrated within luminaire housing 	Construction & Materials	<ul style="list-style-type: none"> • Durable aluminum body with stainless steel fasteners • Architectural grade powder coat rated to super-durable AAMA 2604 specifications • Available in a range of designer-curated FLT colors (Custom colors available upon request)
LED Light Engine	<ul style="list-style-type: none"> • Type 2, 3, 4, and 5 full cut-off high efficiency optics. • CCT Options: 2700K, 3000K, 4000K • IP67 optic sealing provides water and dust ingress protection. • Optional backlight shield 	Wireless Control	<ul style="list-style-type: none"> • Easy-to-use interface via iOS smartpone app • Configure and control lighting profiles • Adjust dusk and dawn thresholds • Adjust motion sensor settings
Optical Performance	<ul style="list-style-type: none"> • Achieves typical lumen output of 8060 lumens • 100,000-hour LED L70 lifetime • B1 – U0 – G1 BUG Rating (T3) 	Reliability & Warranty	<ul style="list-style-type: none"> • Tested for high & low heat and humidity • 5-year warranty • 10+ year battery life • Designed and manufactured in North America
Lighting Profiles	<ul style="list-style-type: none"> • 11 duration-based profiles • Easily configurable, time-of-night profiles • All profiles pre-programmed or field adjustable • Motion-sensing capabilities optimize performance based on usage 		



Order Matrix

Series	Mounting	Finish	Distribution	LED	Lighting Profiles	Options
SCL3	HT - 2 3/8" Tenon Mount	BK - Black	T2 - Type 2	XW - 2700K	00 - On at dusk > Off at dawn	BLS - Backlight Shield
		DB - Dark Bronze	T3 - Type 3	WW - 3000K	01 - On at dusk > Off after 6 hours	MSO - Motion Sensor Off
		LG - Light Grey	T4 - Type 4	NW - 4000K	02 - On at dusk > Dim to 30% after 6 hours > Off at dawn	
		CC- Custom Color	T5 - Type 5		03 - On at dusk > Off after 5 hours > On 1 hour before dawn > Off at dawn	
					04 (Default) - On at dusk > Dim to 30% after 5 hours > Brighten to 100% 1 hour before dawn > Off at dawn	
					05 - On at dusk > Off after 3 hours	
					06 - On at dusk > Off after 4 hours	
					07 - On at dusk > Off after 4 hours > On 1 hour before dawn > Off at dawn	
					08 - Off (typically used with motion sensing)	
					09 (Default) - On at dusk > Dim to 30% after 3 hours > Brighten to 100% 1 hour before dawn > Off at dawn	
					10 - On 30% at dusk > Off at dawn	
					TX0000X0000 - T=Real-time based lighting profile. X=Choose O for off, L for Low (30%) or M for Medium (50%) or B for Bright. 0000=choose event time between 00:00 and 23:59. Second event optional.	

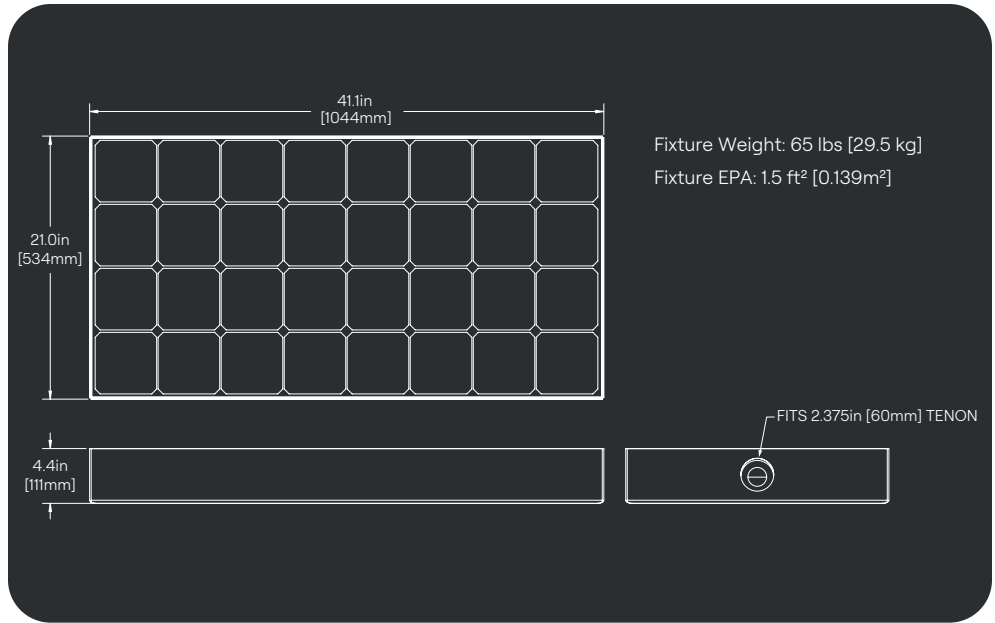
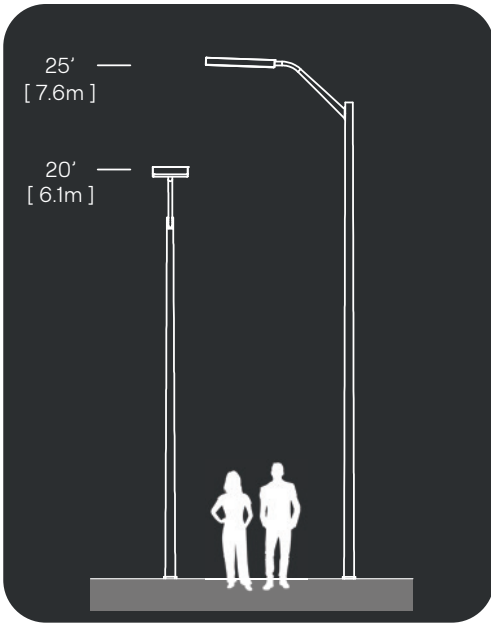


Photometrics



Type 2

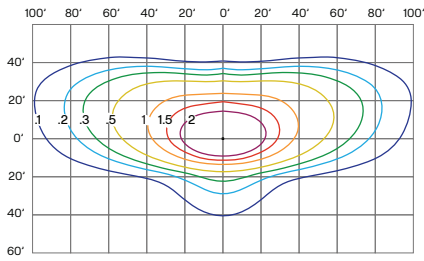



Type 3

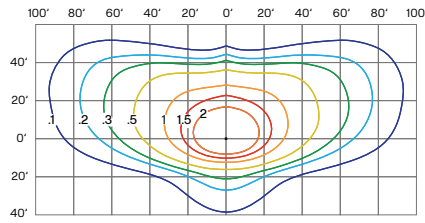

Type 4

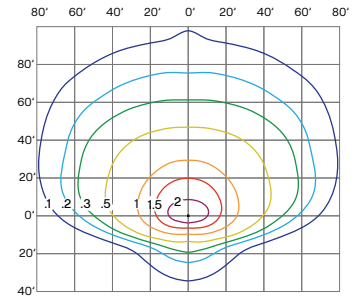

Type 5



Notes:

1. Photometrics based on 25 ft mounting height.
2. All light levels in foot candles (fc) with 4000K color temperature and an output of 8060 lumens.
3. Contact us for help in choosing the right lighting profile and distribution.
4. Specifications subject to change without notice.
5. IES files available at fft.com.