



MODEL	CARRIER WEIGHT	SHAFTS	HYDRAULIC REQ.	AVERAGE OUTPUT
2-3 All-Star	2-3 Tonnes	2	25l/min 70-180bar	10 TPH
4-6 All-Star	4-6 Tonnes	3	50l/min 70-180bar	15 TPH
7-10 All-Star	7-10 Tonnes	4	50l/min 70-180bar	30 TPH
11-14 All-Star	11-14 Tonnes	5	70l/min 70-180bar	45 TPH
15-20 All-Star	15-20 Tonnes	6	120l/min 70-180bar	60 TPH
21-30 All-Star	21-30 Tonnes	7	120l/min 70-180bar	80 TPH

MODEL	CARRIER WEIGHT	SHAFTS	HYDRAULIC REQ.	AVERAGE OUTPUT
LD 0.5	0.5-1 Tonnes	2	25l/min 70-180bar	10 TPH
LD 1-2	1-2 Tonnes	2	25l/min 70-180bar	15 TPH
LD 3-4	3-4 Tonnes	3	50l/min 70-180bar	30 TPH
LD 5-8	5-8 Tonnes	4	50l/min 70-180bar	40 TPH
LD 9-15	9-15 Tonnes	6	120l/min 70-180bar	60 TPH



Email: Sales@difcoequipment.com

Tel: +44 (0) 28 8076 0881

www.difcoequipment.com

***ALL STAR***
SCREENING BUCKET

“Simply Better Built”

The Difco All-Star Screening Bucket has been designed to meet the ever-changing landscape of the recycling and on-site screening industry. The ideal compact screening solution for users who want to reduce their environmental impact while keeping screening costs to a minimum. The All-Star Screening Bucket is equipped with many features as standard, which set it apart from it’s competitors.

Standard Features


- Sealed Heavy Duty Oil Bath
- Extended Bucket Floor
- Integrated Motors With 2 Stage Hydraulic Protection
- Unique Arc Design With Head Deflection
- Single Point Greasing System
- Side Wear Protection
- Tapered Front And Dropped Floor

Durability

- Oil Immersed Chains And Bearings
- Hardox In High Wear Areas
- Fully Welded, Heavy Duty Construction
- Side Impact Protection
- Encased Hydraulics And Components
- Double Support Headplate
- Polyurethane Star Rotors, Mounted On Solid Steel Shafts



EXTRA WEAR TIPS

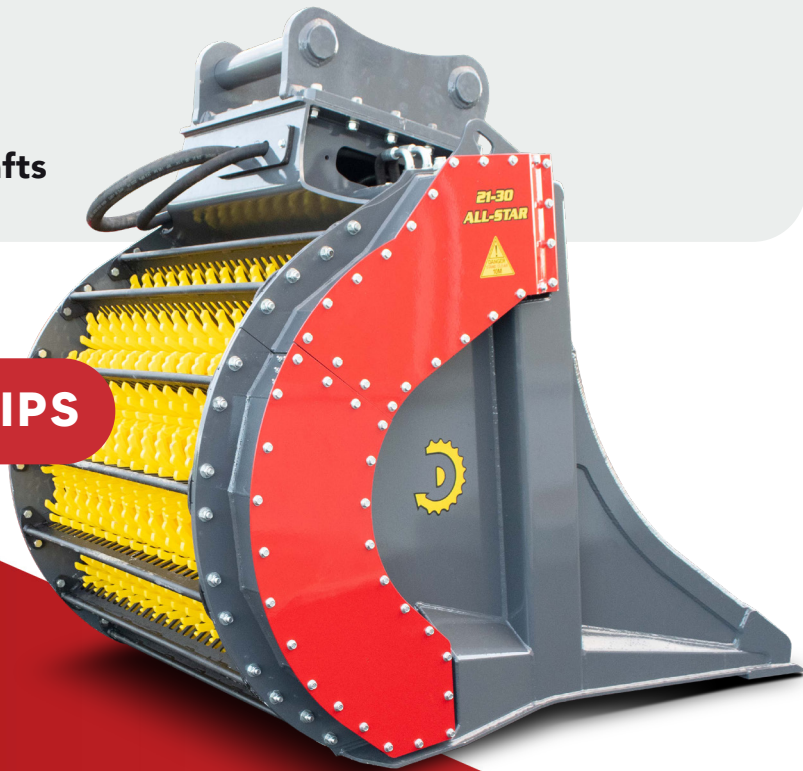

Material Grading

The All-Star Screening Bucket’s polyurethane rotors enable a gentle, rotary screening action, ensuring no shredding or crushing of unwanted, oversized material, resulting in a superior, highgrade end product.



Which All-Star suits you?

All-Star Screening Buckets can be configured to suit individual applications

8mm	10mm	20mm	30mm	40mm
suitable for dry material only (Super fine screening)	*suitable for dry material only* (fine screening)	(Standard)		
• Beach Cleaning • Sawdust • Lime Screening • Sand Bunker Cleaning	• Soils, Peat, Compost, Bagged Material Etc • Pipe Bedding And Padding	• Top Soil • Peat • Stone Cleaning • Compost Mixing • Aggregate Sizing • Biomass Waste • Furnace Waste	• Wood Chip • Golf Course Construction • Land Reclamation • Farm Land Restoration	• Scalping • Recycling • Stone Wall Restoration • Large Aggregate Screening