








# ULW Cables

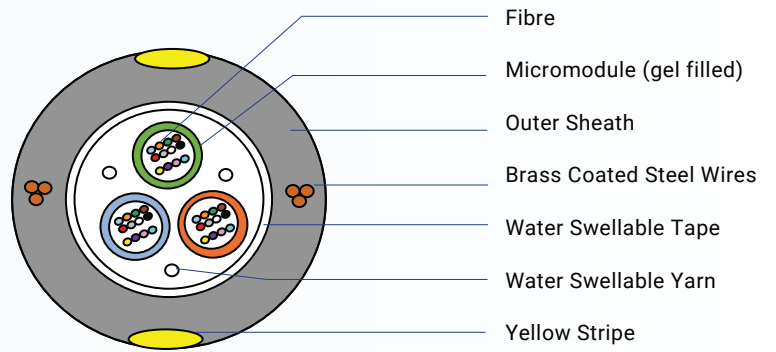




## ULW Cables

Fibre Count	Number of Fibers per Module	Number of Micromodule	Diameter (mm)	Tensile Break Load (N)	Tensile Strength (N)	Crush Resistance (N/10cm)	Bending Radius
12	1	1	7	<2000 N	680	2000	70mm
24	2	2			700		
36	12	3			850		
48	12	4			850		
96	24	4			980		


### Applications

-  | Midspan
-  | Backbone Network
-  | Access Network
-  | Feeder and Distribution
-  | Network
-  | Last Mile

### Customized Options

-  | Different Fiber Count
-  | Single mode and Multimode fibers
-  | Desired Sheath Colour

### Standard Compliance

-  | IEC 60793
-  | ANSI/ICEA S-87-640
-  | Telcordia GR-20
-  | ITU-T
-  | RoHS
-  | REACH

### Temperature Performance (°C)



\*D - Cable Diameter