




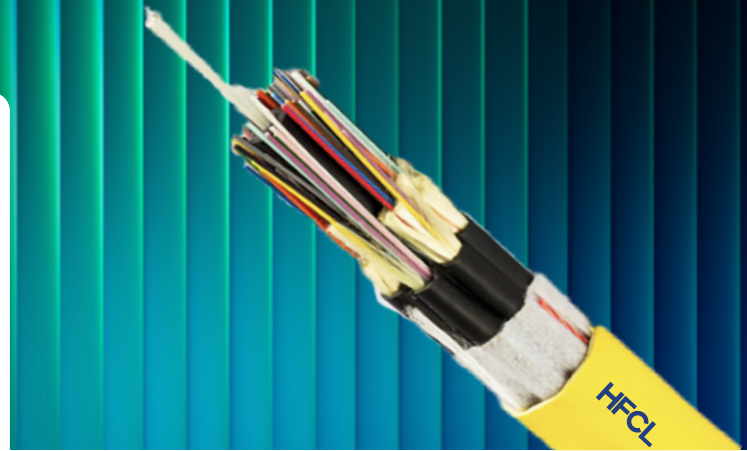
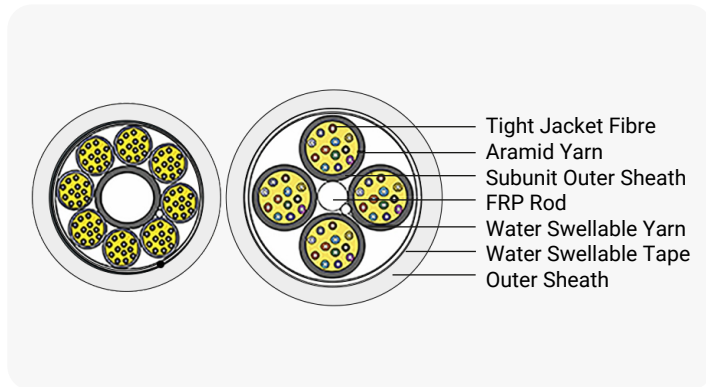


Breakout I-BRKOUT

-  Premises Distribution
-  Feeder and Distribution
-  Ducts and Trays
-  Last Mile
-  LAN & FTTX




Breakout Cable




Customized Options

- Single mode and Multimode Fibres
- Desired Sheath Colour
- Sheath in PU/LSZH
- Tight Buffering in Nylon - 12/LSZH/PVC
- 900 micron Tight Buffer & 600 micron Tight Buffer


Temperature Performance (°C)



Installation



Operation



Storage

Premises Distribution Cables

Type	Fibre Count	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
				I	O		I	O
2F	2	7.5 ± 0.5	55 ± 5	400	400	500N/10 CM	75	150
4F	4	7.5 ± 0.5	55 ± 5	400	400		75	150
6F	6	8.5 ± 0.5	75 ± 10	800	800		85	160
8F	8	10.5 ± 0.5	100 ± 10	1000	1000		100	200
12F	12	12.7 ± 0.5	155 ± 15	1500	1500		127	254
16F	16	13.0 ± 0.5	130 ± 15	2000	2000		130	260
24F	24	15.0 ± 0.5	215 ± 20	2500	2500		150	300
48F	48	18.0 ± 1	270 ± 30	1200	1200		150	300
72F	72	18.0 ± 1	270 ± 30	1200	1200		150	300
96F	96	25.0 ± 2	510 ± 50	1300	1300		150	300
I - Installation		O - Operational		D - Cable Diameter				