




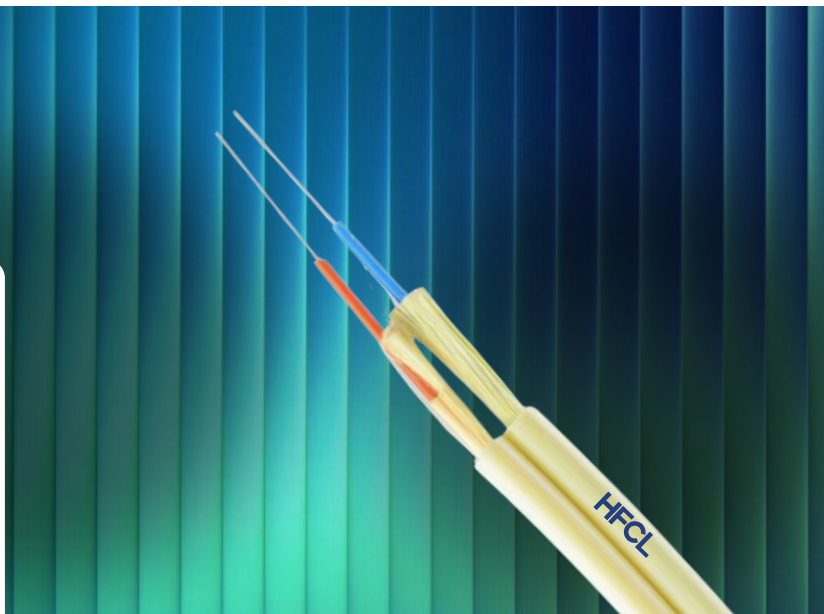



Duplex

I-DX

-  Indoor Distribution
-  Branching in High Rises
-  Pig Tails
-  Patch Cords
-  LAN & FTTX




Duplex OFC

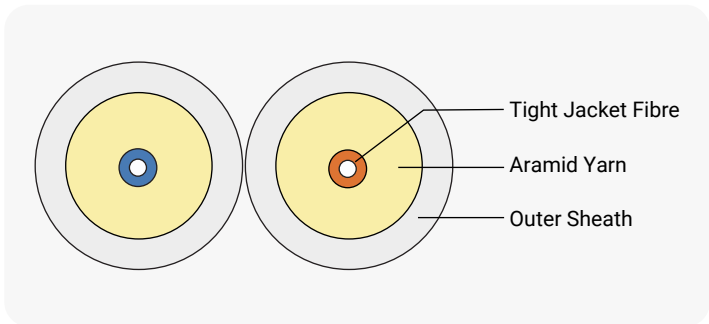


Customized Options
• Single mode and Multimode Fibres
• Desired Sheath Colour
• Sheath in PU/PVC/LSZH
• Tight Buffering in Nylon - 12/LSZH/PVC


Temperature Performance (°C)



Installation



Operation



Storage

Duplex

Type	Fibre Count	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
				I	O		I	O
2 F (600 m)	2	(2.0 x 4.2) ± 0.3	7.0 ± 2	200	100	10CM	10D	20D
2 F (900 m)	2	(3.0 x 6.2) ± 0.3	15.0 ± 3	250	100		10D	20D
I - Installation		O - Operational		D - Cable Diameter				