




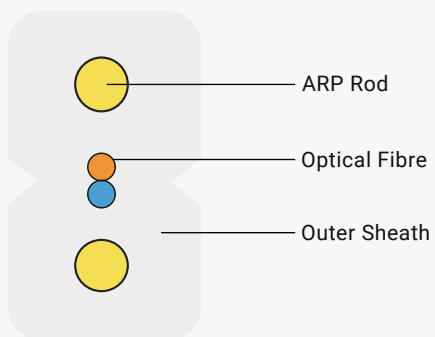


Indoor Flat I-FLAT



-  Indoor Distribution
-  Branching in High Rises
-  Pig Tails
-  Patch Cords
-  LAN & FTTX


Flat Indoor Drop




Customized Options

- Single mode and Multimode Fibres
- Desired Sheath Colour
- FRP/Steel Wire Strength member


Temperature Performance(°C)



Installation



Operation



Storage

Indoor Drop Cable

Type	Fibre Count	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
				I	O		I	O
2F	2	(2.0 X 3.0) ± 0.2	8 ± 2	100	80	1000N/1010 CM	20MM	32MM
4F	4	(2.0 X 3.0) ± 0.2	8 ± 2					
I - Installation		O - Operational		D - Cable Diameter				