


## Outdoor Flat O-FLAT





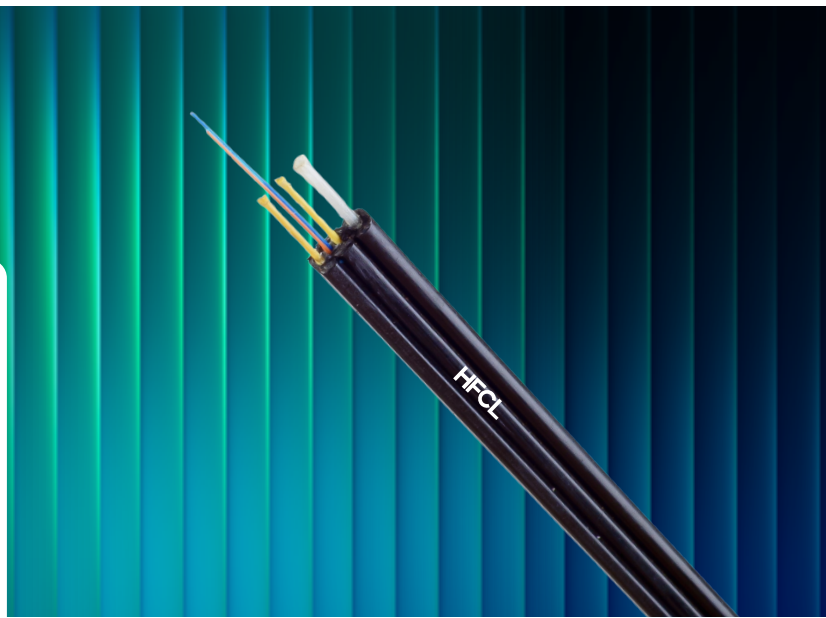


-  Indoor & Outdoor
-  Aerial Short Span
-  LAN & FTTX
-  Last Mile


Fig. 8 Outdoor Drop




### Customized Options

- Single mode and Multimode Fibres
- Messenger wire: Steel wire/Bunched
- KRP/Steel wire/FRP embedded strength member
- Desired Sheath Colour


## Temperature Performance(°C)



Installation



Operation



Storage

## Outdoor Drop Cable

Type	Fiber Count	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
				I	O		I	O
2F	2	(2.1 X 5.2) ± 0.2	18 ± 2	600	300	2000N/10CM	20MM	32MM
4F	4	(2.1 X 5.2) ± 0.2	18 ± 2					
I - Installation		O - Operational		D - Cable Diameter				