




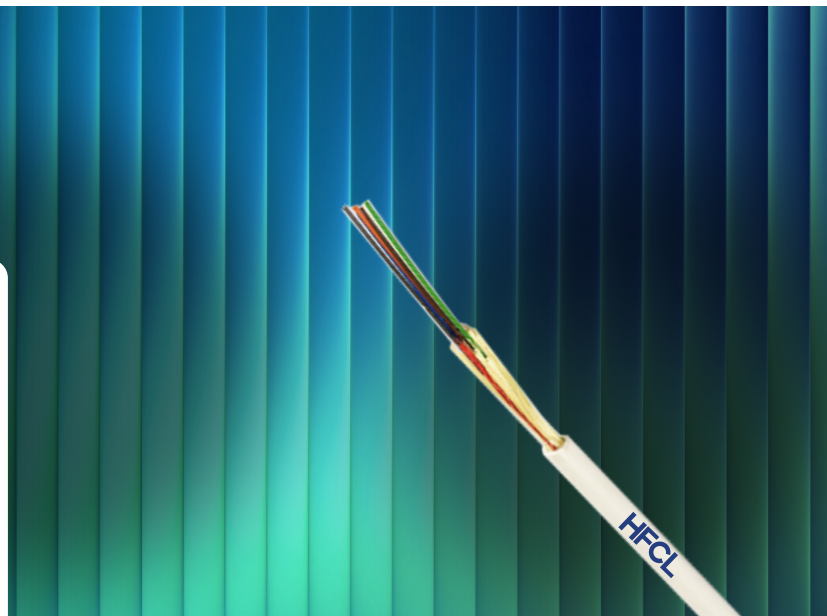



Indoor Premises Distribution

I-PD

-  Premises Distribution
-  Feeder and Distribution
-  Ducts and Trays
-  Last Mile
-  LAN & FTTX




Distribution OFC

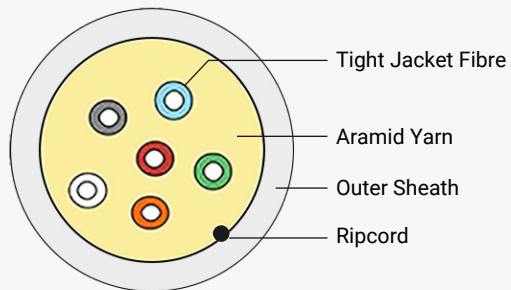


Customized Options

- Single mode and Multimode Fibres
- Desired Sheath Colour
- Sheath in PU/LSZH
- Tight Buffering in Nylon - 12/LSZH/PVC
- Peripheral strength member as glass yarns
- 900 micron Tight Buffer & 600 micron Tight Buffer


Temperature Performance(°C)



Installation



Operation



Storage

Premises Distribution Cables

Type	Fibre Count	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
				I	O		I	O
2F	2	3.6 ± 0.3	14 ± 2	500	200	1000N/10 CM	10 x D	5 x D
4F	4	4.2 ± 0.3	18 ± 2					
6F	6	6.0 ± 0.3	30 ± 5					
8F	8	6.2 ± 0.3	35 ± 5					
12F	12	6.8 ± 0.3	40 ± 5					
16F	16	7.3 ± 0.3	48 ± 5					
24F	24	8.5 ± 0.3	65 ± 5					
I - Installation		O - Operational		D - Cable Diameter				