


Simplex I-SX




- Indoor Distribution
- Branching in High Rises
- Pig Tails
- Patch Cords
- LAN & FTTX

Simplex OFC

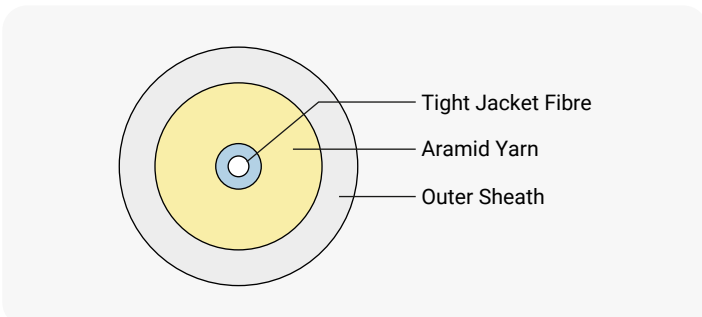


- #### Customized Options
- Single mode and Multimode Fibres
 - Desired Sheath Colour
 - Sheath in PU/PVC/LSZH
 - Tight Buffering in Nylon - 12/LSZH/PVC


Temperature Performance(°C)



Installation



Operation



Storage

Simplex

Type	Fibre Count	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
				I	O		I	O
1 F	1	2.0 ± 0.3	3.0 ± 1	100	50	400N	10D	20D
1 F	1	3.0 ± 0.3	7.0 ± 2	150	75		10D	20D

I - Installation O - Operational D - Cable Diameter