



Blown Unitube Cables (CFUs)

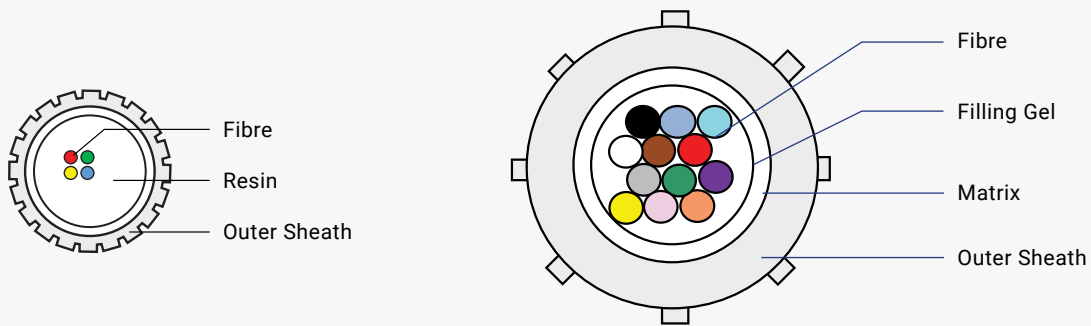


Customized Options

- Single mode and Multimode fibers
- Polypropylene outer sheath


Temperature Performance(°C)



Installation



Operation



Storage

Blown Unitube Cables (CFUs)

Fibre Count	Diameter (MM)	Tensile Strength (N)	Crush	Bending Radius
2	1.2	30	100 N/10 CM	20 x D
4	1.2			
6	1.3			
8	1.5			
12	1.6			

Applications

- Outdoor Micro Duct
- Duct Blowing
- Distribution network
- LAN and FTTX

Standard Compliance

- Telecordia GR-20
- IEC 60794
- EIA/TIA
- ITU-T
- EN 187000
- RUS1755.900

*D - Cable Diameter