



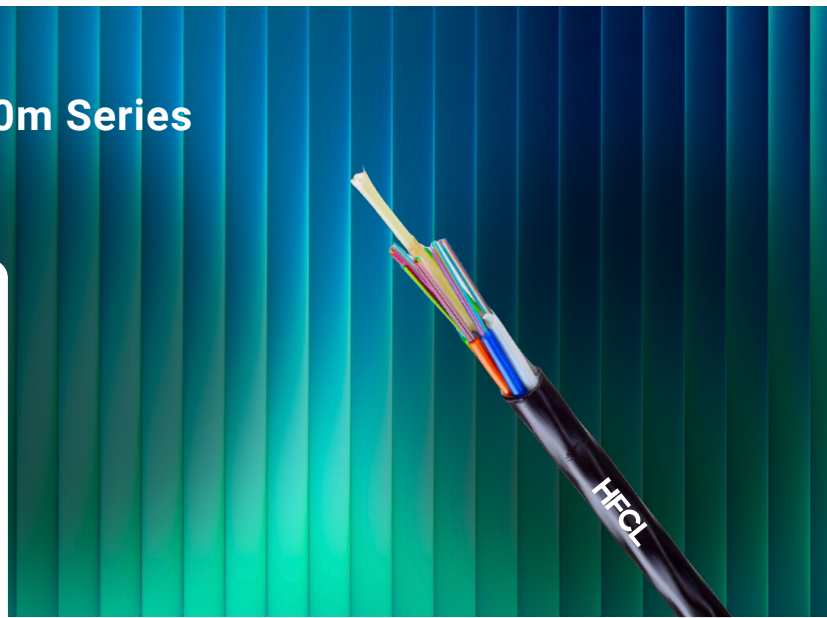


## Microduct Multitube Extra Thin- 250m Series MIC-MT-ET (Extra Thin)

-  Micro Duct
-  Duct Blowing
-  Access Network
-  Distribution Network



### Multitube Micro



96F




144F




216F



288F




432F

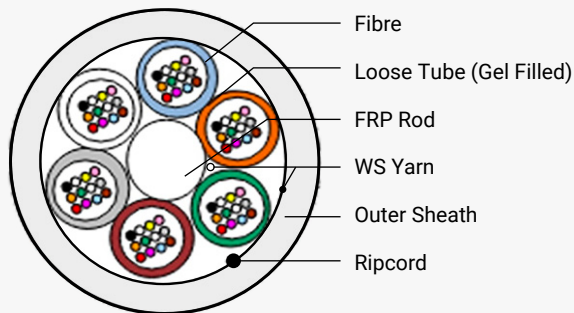


### Customized Options

- Single mode and Multimode Fibres
- Desired Sheath Colour
- Outer Sheath in Polyamide
- Different Fiber Count


## Temperature Performance(°C)



Installation



Operation



Storage

## Extra Thin Micro Cable

Type	Fiber Count	Fiber/Tube	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
					I	O		I	O
1-6T x 4F	24	4	5.0 ± 0.3	20 ± 5	700	500	1000 N/10 CM	10 X D	20 X D
1-6T x 6F	36	6	5.0 ± 0.3	20 ± 5	700	500			
1-6T x 8F	48	8	5.0 ± 0.3	20 ± 5	700	500			
1-6T x 12F	72	12	5.0 ± 0.3	20 ± 5	700	500			
8T x 12F	96	12	5.8 ± 0.3	35 ± 5	1200	1000			
12T x 12F	144	12	7.6 ± 0.3	55 ± 5	1500	1200			
6T x 24F	144	24	6.4 ± 0.3	35 ± 5	1000	800			
8T x 24F	192	24	7.7 ± 0.3	55 ± 5	1500	1200			
9T x 24F	216	24	8.3 ± 0.3	60 ± 10	1500	1200			
12T x 24F	288	24	10.2 ± 0.3	90 ± 10	1500	1200			
18T x 24F	432	24	10.5 ± 0.3	90 ± 10	1000	800			
24T x 24F	576	24	12.0 ± 0.3	130 ± 10	1500	1200			
I - Installation		O - Operational		D - Cable Diameter					