





## Microduct Multitube Ultrathin- 200M Series MIC-MT-UT (Ultra Thin)



-  Micro Duct
-  Duct Blowing
-  Access Network
-  Distribution Network

### Multitube Micro



96F




144F




216F



288F




432F

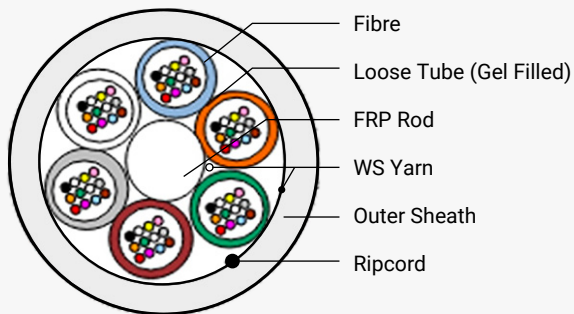


### Customized Options

- Single mode and Multimode Fibres
- Desired Sheath Colour
- Outer Sheath in Polyamide
- Different Fiber Count


## Temperature Performance(°C)



Installation



Operation



Storage

## Multitube Micro Cable

Type	Fiber Count	Fiber/Tube	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
					I	O		I	O
1-6T x 4F	24	4	4.5 ± 0.3	15 ± 5	500	300	1000 N/10 CM	10 X D	20 X D
1-6T x 6F	36	6	4.5 ± 0.3	15 ± 5	500	300			
1-6T x 8F	48	8	4.5 ± 0.3	15 ± 5	500	300			
1-6T x 12F	72	12	4.5 ± 0.3	15 ± 5	500	300			
8T x 12F	96	12	5.2 ± 0.3	28 ± 5	1000	800			
12T x 12F	144	12	6.8 ± 0.3	50 ± 5	1200	1000			
6T x 24F	144	24	5.5 ± 0.3	30 ± 10	1000	600			
8T x 24F	192	24	6.4 ± 0.3	45 ± 10	1200	1000			
9T x 24F	216	24	7.0 ± 0.3	45 ± 10	1500	800			
12T x 24F	288	24	8.6 ± 0.3	80 ± 10	1200	1000			
18T x 24F	432	24	9.5 ± 0.3	80 ± 10	1000	800			
24T x 24F	576	24	10.2 ± 0.3	100 ± 10	1200	1000			

I - Installation

O - Operational

D - Cable Diameter