



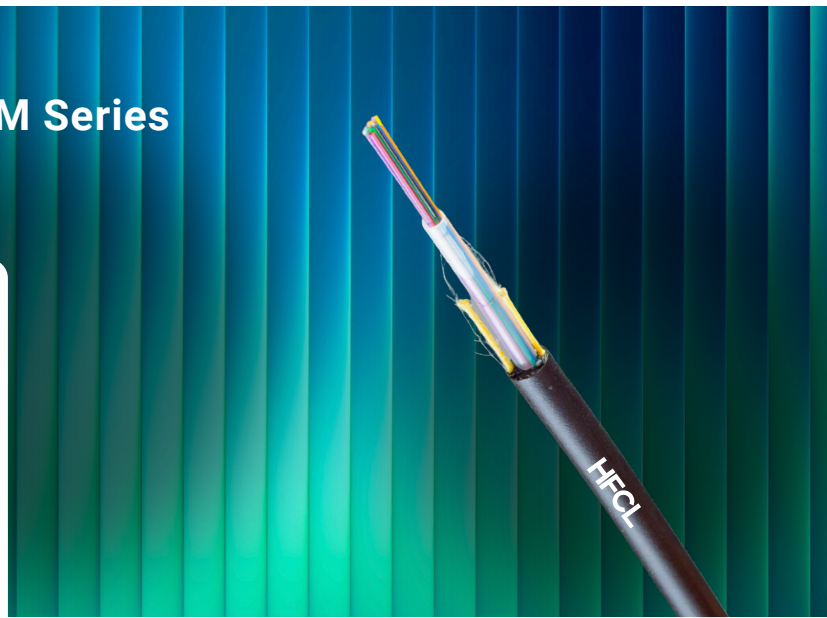
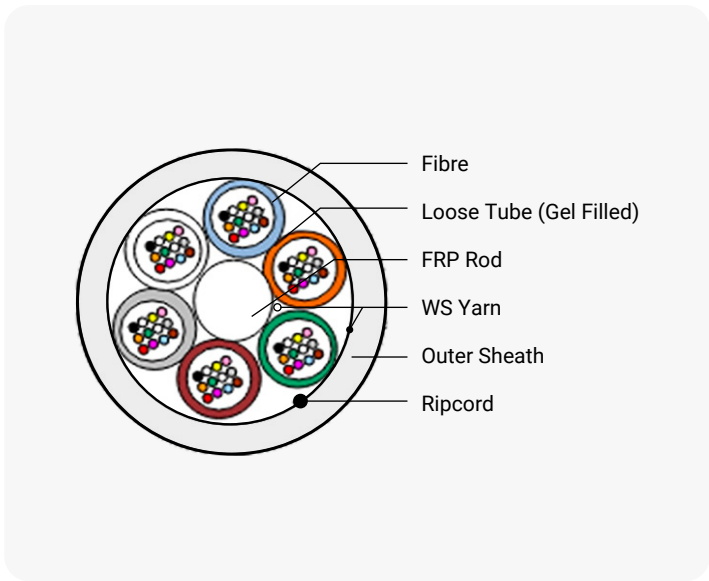
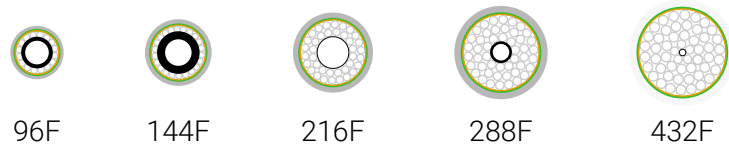


Microduct Multitube Standard -250M Series MIC-MT-ST (Standard)

-  Micro Duct
-  Duct Blowing
-  Access Network
-  Distribution Network




Multitube Micro Ws Yarn Over FRP + Core




Customized Options
• Single mode and Multimode Fibres
• Desired Sheath Colour
• Outer Sheath in Polyamide
• Different Fiber Count


Temperature Performance(°C)



Installation



Operation



Storage

Multitube Micro Cable (Standard)

Type	Fiber Count	Fiber/Tube	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
					I	O		I	O
1-6T x 4F	4-24	4	5.8 ± 0.3	25 ± 5	1000	600	1000 N/10 CM	10 X D	20 X D
1-6T x 6F	6-36	6	5.8 ± 0.3	25 ± 5	1000	600			
1-6T x 8F	8-48	8	5.8 ± 0.3	25 ± 5	1000	600			
1-6T x 12F	12-72	12	5.8 ± 0.3	25 ± 5	1000	600			
8T x 12F	96	12	6.6 ± 0.3	40 ± 5	1200	1000			
12T x 12F	144	12	8.8 ± 0.3	70 ± 10	1200	1000			
16T x 12F	192	12	9.0 ± 0.3	65 ± 10	1200	1000			
18T x 12F	216	12	9.0 ± 0.3	70 ± 10	1200	1000			
24T x 12F	288	12	10.3 ± 0.3	95 ± 10	1200	1000			
36T x 12F	432	12	12.0 ± 0.3	120 ± 10	1000	600			
6T x 24F	144	24	7.5 ± 0.3	50 ± 5	1500	1000			
8T x 24F	192	24	8.8 ± 0.3	75 ± 10	1200	1000			
9T x 24F	216	24	9.2 ± 0.3	80 ± 10	1500	1000			
12T x 24F	288	24	11.5 ± 0.3	105 ± 10	2000	1500			
18T x 24F	432	24	11.7 ± 0.3	125 ± 10	1000	800			
24T x 24F	576	24	13.5 ± 0.3	175 ± 15	2000	1500			
I - Installation		O - Operational		D - Cable Diameter					