
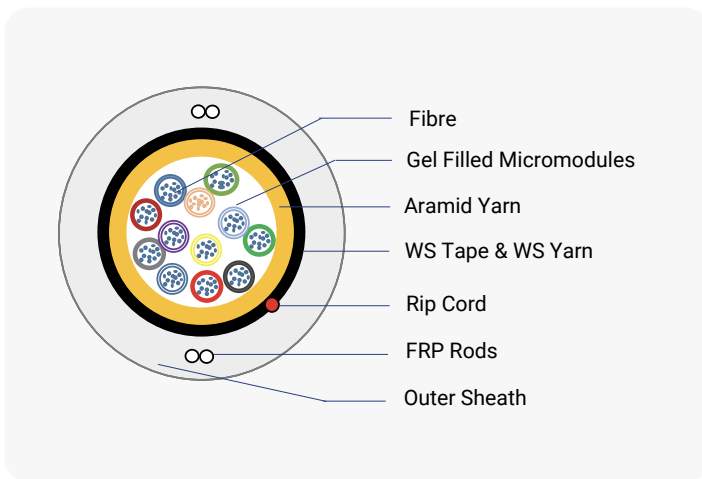



Transport Network Cables

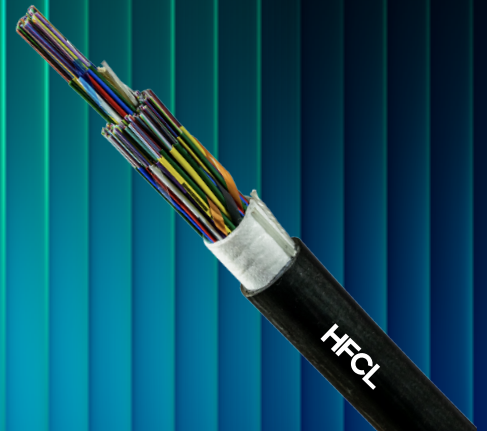


Customized Options

- Different Fibre Count
- Single mode and Multimode fibres
- Desired Sheath Colour


Temperature Performance(°C)



Installation



Operation



Storage

Transport Network Cables

Fibre Count	Diameter (MM)	Breaking Load (N)	Tensile Strength (N)		Crush	Bending Radius	
			I	O		I	O
12	6.5	3700	1300	400	2000 N/10 CM	20 x D	10 x D
24	8	3700	1300	800			
36	8.2	5200	1800	800			
48	8.7	5200	1800	800			
72	9.5	5700	2000	800			
96	10.2	5700	2000	800			
144	11.2	6300	2200	800			
288	13.5	7800	2700	900			
I - Installation		O - Operational		D - Cable Diameter			

Available in G.657A1

Applications

- Midspan
- Backbone network
- Access network
- Feeder and distribution network
- Last-mile connectivity

Standard Compliance

- Telecordia GR-20
- IEC 60794
- EIA/TIA
- ITU-T
- EN 187000
- RUS1755.900

*D - Cable Diameter