







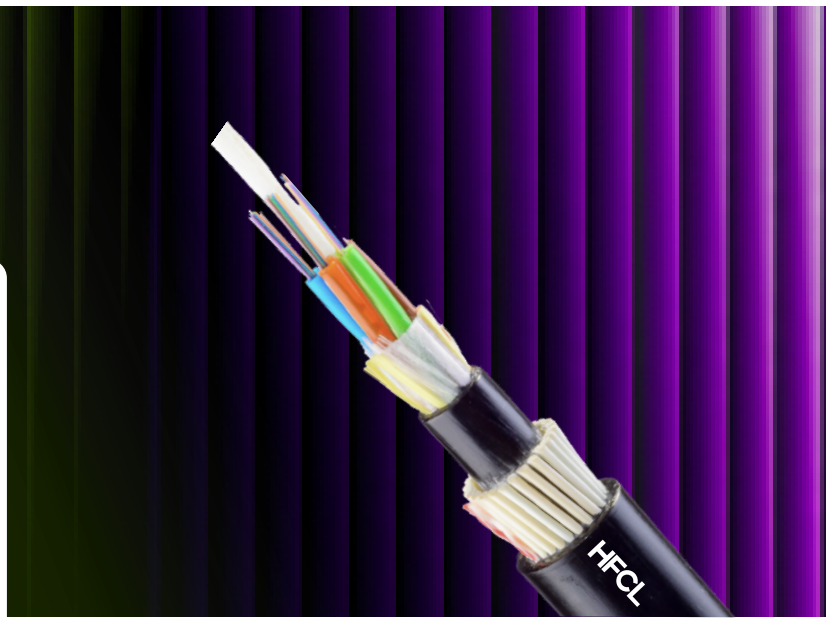


## Arm Multitube Double Sheath FRP ARM-MT-FRP-DS




-  Backbone Network
-  Feeder Cables
-  Intracity Aerial Network
-  Access Network
-  Aerial Long Span
-  Outdoor Direct Burial

### Multitube FRP Armoured (Wet Core)

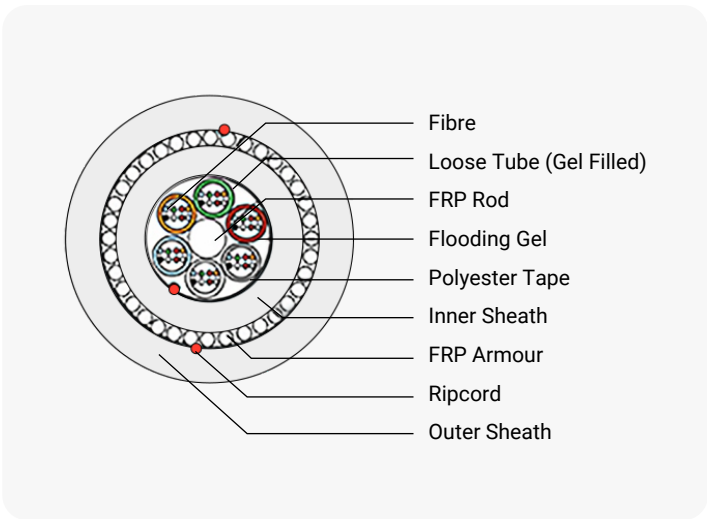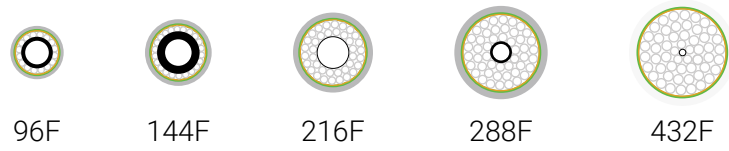


Customized Options
• Different Fibre Count
• Single mode and Multimode fibres
• Sheath in LDPE/MDPE/LSZH/HDPE/LLDPE
• Desired Sheath Colour
• Dry Core/Dry Tube Construction
• Flat or Round FRP rods
• Enhanced Mechanical Characteristics


## Temperature Performance(°C)



Installation



Operation



Storage

## Multitube Double Sheath FRP Rod Arm Cable

Type	Fibre Count	Fiber/Tube	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
					I	O		I	O
1-6T X 4F	4-24	4	15.5 ± 1	220 ± 20	5500	5000	4000 N/10 CM	15 X D	20 X D
1-6T X 6F	6-36	6	16.0 ± 1	225 ± 20	5500	5000			
1-6T X 8F	8-48	8	16.5 ± 1	235 ± 25	5500	5000			
1-6T X 12F	12-72	12	16.5 ± 1	240 ± 25	4000	3500			
8T X 12F	96	12	18.0 ± 1	280 ± 30	5500	5000			
12T X 12F	144	12	20.5 ± 2	375 ± 40	9000	8500			
16T X 12F	192	12	20.5 ± 2	340 ± 35	7500	7000			
18T X 12F	216	12	20.5 ± 2	345 ± 35	7500	7000			
24T X 12F	288	12	22.5 ± 2	415 ± 40	7500	7000			
36T X 12F	432	12	25.5 ± 2	530 ± 55	7500	7000			
6T X 24F	144	24	17.5 ± 1	270 ± 25	6500	6000			
8T X 24F	192	24	19.0 ± 1	330 ± 35	6500	6000			
9T X 24F	216	24	23.0 ± 2	360 ± 35	6500	6000			
12T X 24F	288	24	23.0 ± 2	460 ± 45	6500	6000			
18T X 24F	432	24	23.5 ± 2	460 ± 45	6500	6000			
I - Installation		O - Operational		D - Cable Diameter					