









Arm Multitube Single Sheath Steel Tape ARM-MT-CST

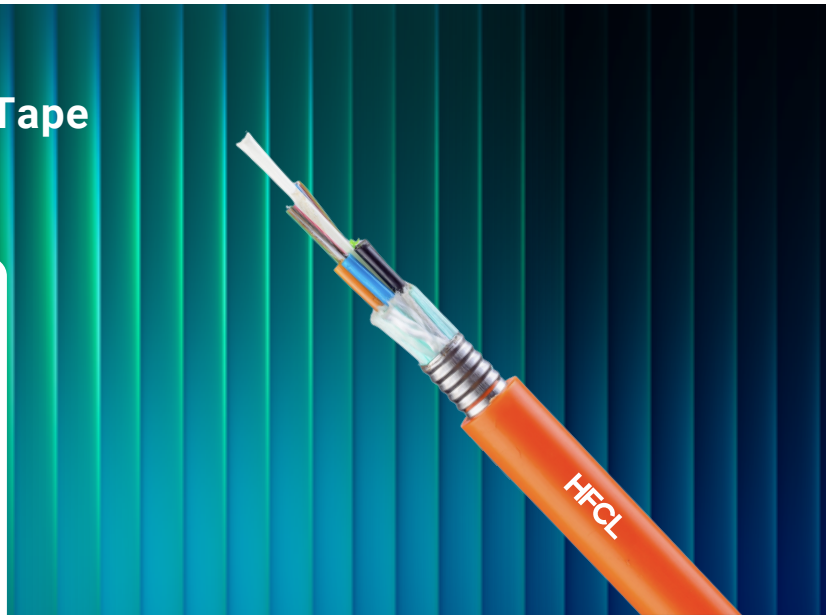


-  Backbone Network
-  Feeder and Distribution
-  Access Network
-  Duct Manual Pulling
-  Outdoor Direct Burial

Multitube Armoured (Dry Core) Single Sheath

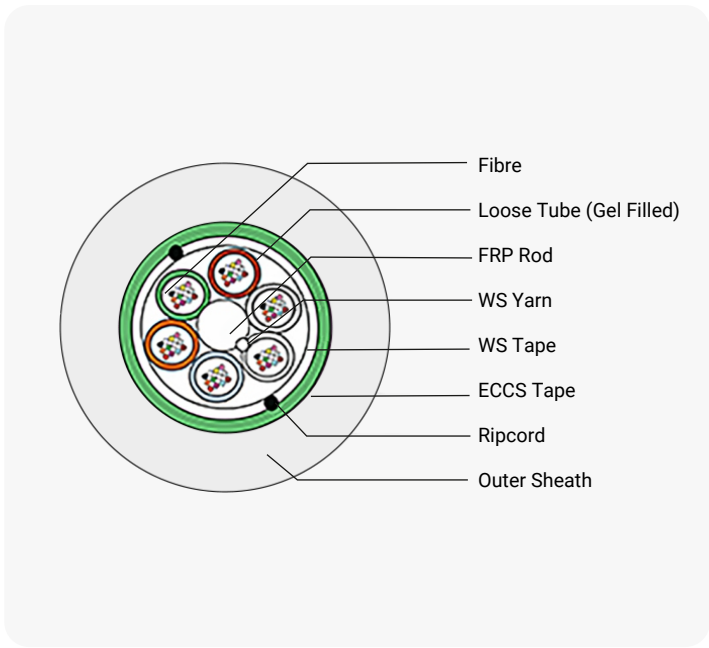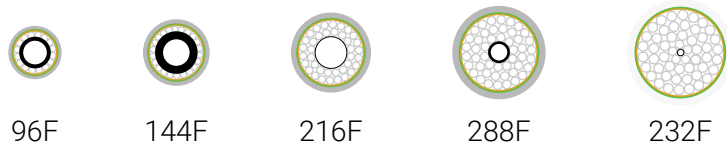


Customized Options
• Different Fibre Counts
• Single mode and Multimode
• Outer Sheath in LDPE/MDPE/LSZH/HDPE/LLDPE
• Desired Sheath Colour
• Wet Core/Dry Tube Construction
• Sacrificial Nylon Sheathing
• Polyal Moisture Barrier Tape
• Steel wire as central strength member
• Enhanced Mechanical Characteristics


Temperature Performance(°C)



Installation



Operation



Storage

Multitube Armoured Single Sheath Cable

Type	Fibre Count	Fibre/Tube	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
					I	O		I	O
1-6T x 4F	4-24	4	11.0 ± 0.5	110 ± 10	2000	1500	2000 N/10 CM	15 X D	20 X D
1-6T x 6F	6-36	6	11.0 ± 0.5	115 ± 10	2000	1500			
1-6T x 8F	8-48	8	11.5 ± 0.5	125 ± 10	2500	1500			
1-6T x 12F	12-72	12	11.5 ± 0.5	125 ± 10	2500	1500			
8T x 12F	96	12	12.0 ± 0.5	150 ± 15	3000	2000			
12T x 12F	144	12	15.5 ± 1	225 ± 20	3500	3000			
16T x 12F	192	12	17.0 ± 1	225 ± 20	5000	4000			
18T x 12F	216	12	17.0 ± 1	225 ± 20	5000	4000			
24T x 12F	288	12	18.5 ± 1	295 ± 30	5000	4500			
36T x 12F	432	12	21.5 ± 2	385 ± 35	4500	4000			
I - Installation		O - Operational		D - Cable Diameter					