




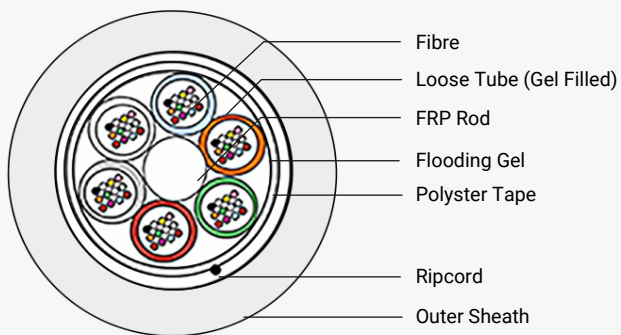


## Duct Multitube D-MT

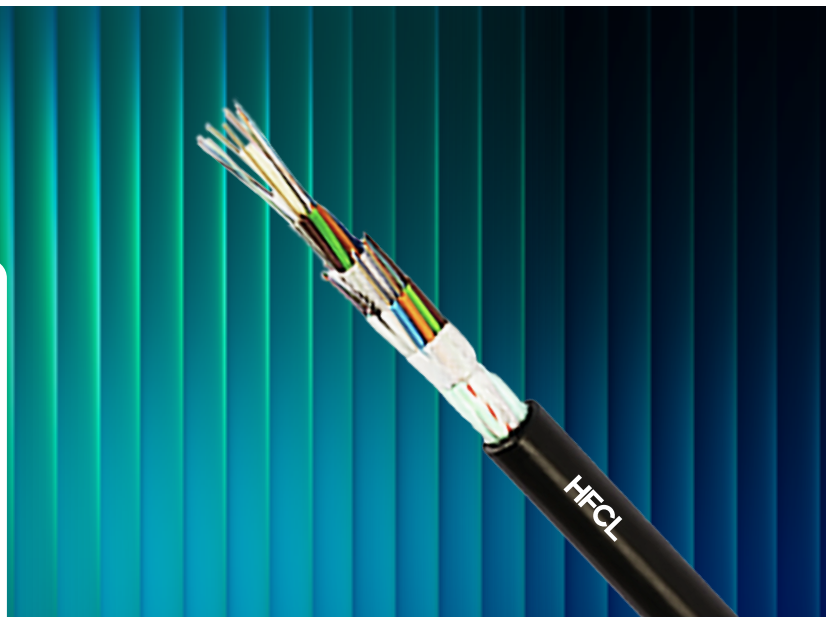

-  Backbone Network
-  Feeder and Distribution
-  Duct Manual Pulling
-  Duct Blowing


### Unarmoured (Wet Core) Single Sheath




#### Customized Options

- Different Fibre Counts
- Single mode and Multimode Fibres
- Outer Sheath in LDPE/MDPE/LSZH/HDPE
- Desired Sheath Colour
- Dry Core/Dry Tube Construction
- Sacrificial Nylon Sheathing
- Polyal Moisture Barrier Tape


## Temperature Performance(°C)



Installation



Operation



Storage

## Multitube Unarm Cable

Type	Fibre Count	Fibre/Tube	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
					I	O		I	O
1-6T X 4F	4-24	4	9.0 ± 0.5	65 ± 10	1500	1000	2000 N/10 CM	10 X D	20 X D
1-6T X 6F	6-36	6	9.5 ± 0.5	70 ± 10	1500	1000			
1-6T X 8F	8-48	8	10.0 ± 0.5	80 ± 10	2000	1500			
1-6T X 12F	12-72	12	10.0 ± 0.5	80 ± 10	2000	1500			
8T X 12F	96	12	11.5 ± 0.5	100 ± 10	2500	2000			
12T X 12F	144	12	14.0 ± 0.5	160 ± 15	3500	3000			
16T X 12F	192	12	15.0 ± 1	160 ± 15	2000	1500			
18T X 12F	216	12	15.0 ± 1	160 ± 15	2000	1500			
24T X 12F	288	12	17.0 ± 1	216 ± 20	3500	3000			
36T X 12F	432	12	20.5 ± 2	290 ± 30	3500	3000			
6T X 24F	144	24	12.0 ± 0.5	125 ± 10	2500	2000			
8T X 24F	192	24	14.0 ± 0.5	170 ± 15	3500	3000			
9T X 24F	216	24	15.0 ± 1	190 ± 15	3500	3000			
12T X 24F	288	24	17.5 ± 1	265 ± 25	3500	3000			
18T X 24F	432	24	18.0 ± 1	275 ± 25	2500	2000			
I - Installation		O - Operational		D - Cable Diameter					