






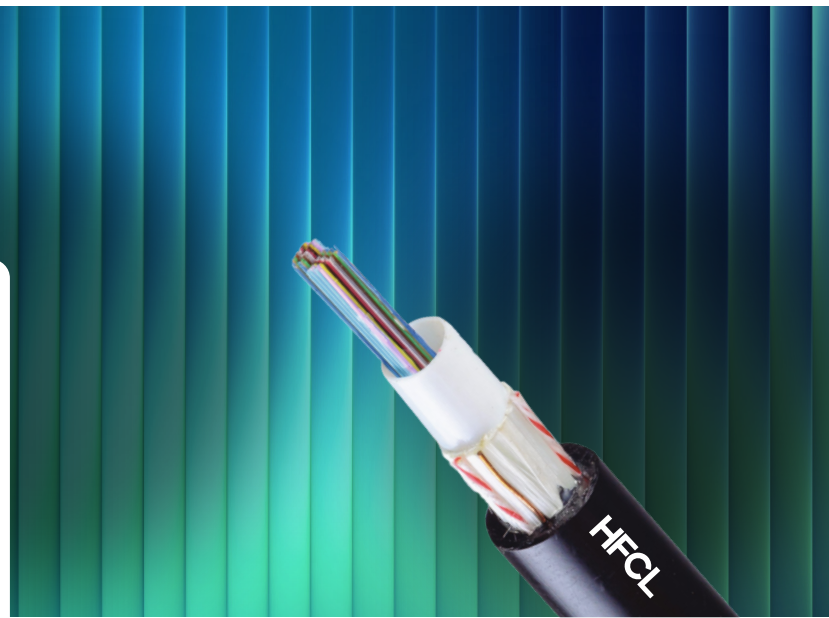
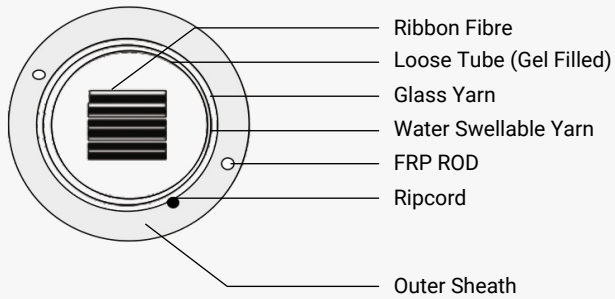


Duct Unitube With Ribbon Fiber D-UT-RF

-  Duct Blowing
-  Compact Design
-  Indoor & Outdoor
-  Access Network
-  CATV
-  Distribution Network
-  LAN & FTTX




Unarmoured Unitube With Ribbon Fibre




Customized Options

- Single Mode and Multimode Fibres
- Outer sheath in HDPE/LDPE/MDPE/LLDPE/LSZH/FR-PE
- Desired Sheath Colour
- Enhanced Tensile Performance


Temperature Performance(°C)



Installation



Operation



Storage

Unitube Unarm With Glass Yarns

Type	Fibre Count	Fibre/Ribbon	Ribbon/Tube	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
						I	O		I	O
1T x 4F	48	12	4	11.0 ± 0.5	105 ± 10	1000	500	1000 N/10 CM	10 X D	20 X D
1T x 6F	72	12	6	11.5 ± 0.5	110 ± 10	1000	500			
1T x 8F	96	12	8	12.0 ± 0.5	115 ± 10	1000	500			
1T x 12F	144	12	12	12.5 ± 0.5	125 ± 15	1000	500			
I - Installation		O - Operational			D - Cable Diameter					