








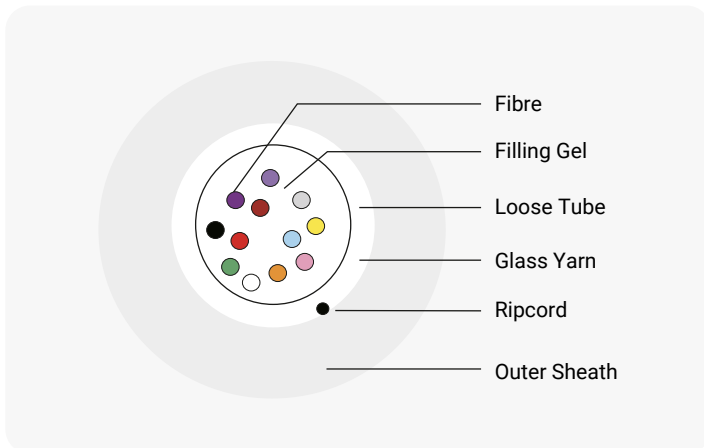
Duct Unitube

D-UT

-  Duct Blowing
-  Compact Design
-  Indoor & Outdoor
-  Access Network
-  CATV
-  Distribution Network
-  LAN & FTTX




Unarmoured With Glass Yarn




Customized Options

- Single Mode and Multimode Fibres
- Outer Sheath in HDPE/LDPE/MDPE/LLDPE/LSZH/FR-PE
- Desired Sheath Colour
- Desired Sheath Thickness
- Enhanced Tensile Performance
- Dry Tube Construction


Temperature Performance(°C)



Installation



Operation



Storage

Unitube Unarm With Glass Yarns

Type	Fibre Count	Fibre/Tube	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
					I	O		I	O
1T x 2F	2	2	6.0 ± 0.5	30 ± 5	800	500	1000 N/10 CM	10 X D	20 X D
1T x 4F	4	4	6.0 ± 0.5	30 ± 5					
1T x 6F	6	6	6.0 ± 0.5	30 ± 5					
1T x 8F	8	8	6.0 ± 0.5	30 ± 5					
1T x 12F	12	12	6.0 ± 0.5	30 ± 5					
1T x 16F	16	16	6.5 ± 0.5	45 ± 5					
1T x 24F	24	24	6.5 ± 0.5	45 ± 5					
I - Installation		O - Operational		D - Cable Diameter					