




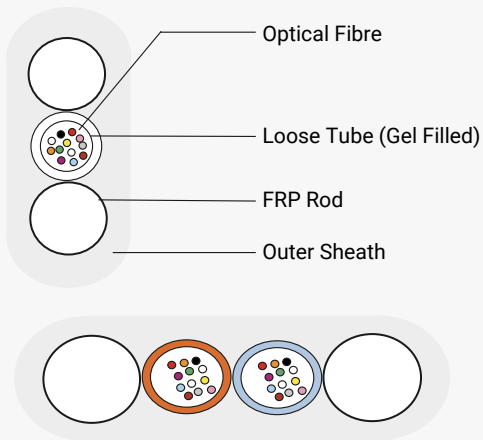


## Aerial Flat AER-FLAT




-  Indoor Distribution
-  Branching in High Rises
-  Pig Tails
-  Patch Cords
-  LAN & FTTX




### Customized Options

- Single mode and Multimode Fibres
- Desired Sheath Colour


### Temperature Performance(°C)



Installation



Operation



Storage

## Indoor Drop Cable

Type	Fiber Count	Fiber/Tube	Diameter (MM)	Weight (KG/KM)	Tensile Strength (N)		Crush	Bending Radius	
					I	O		I	O
1T x 2F	2	2	(3.5 x 6.5) ± 0.3	25 ± 5	1200	800	1000 N	20MM	32MM
1T x 4F	4	4	(3.5 x 6.5) ± 0.3	25 ± 5					
1T x 6F	6	6	(3.5 x 6.5) ± 0.3	25 ± 5					
1T x 8F	8	8	(3.5 x 6.5) ± 0.3	25 ± 5					
1T x 12F	12	12	(3.5 x 6.5) ± 0.3	25 ± 5					
2T x 8F	16	8	(3.8 x 8.8) ± 0.3	35 ± 5					
2T x 12F	24	12	(3.8 x 8.8) ± 0.3	35 ± 5					
I - Installation		O - Operational		D - Cable Diameter					