


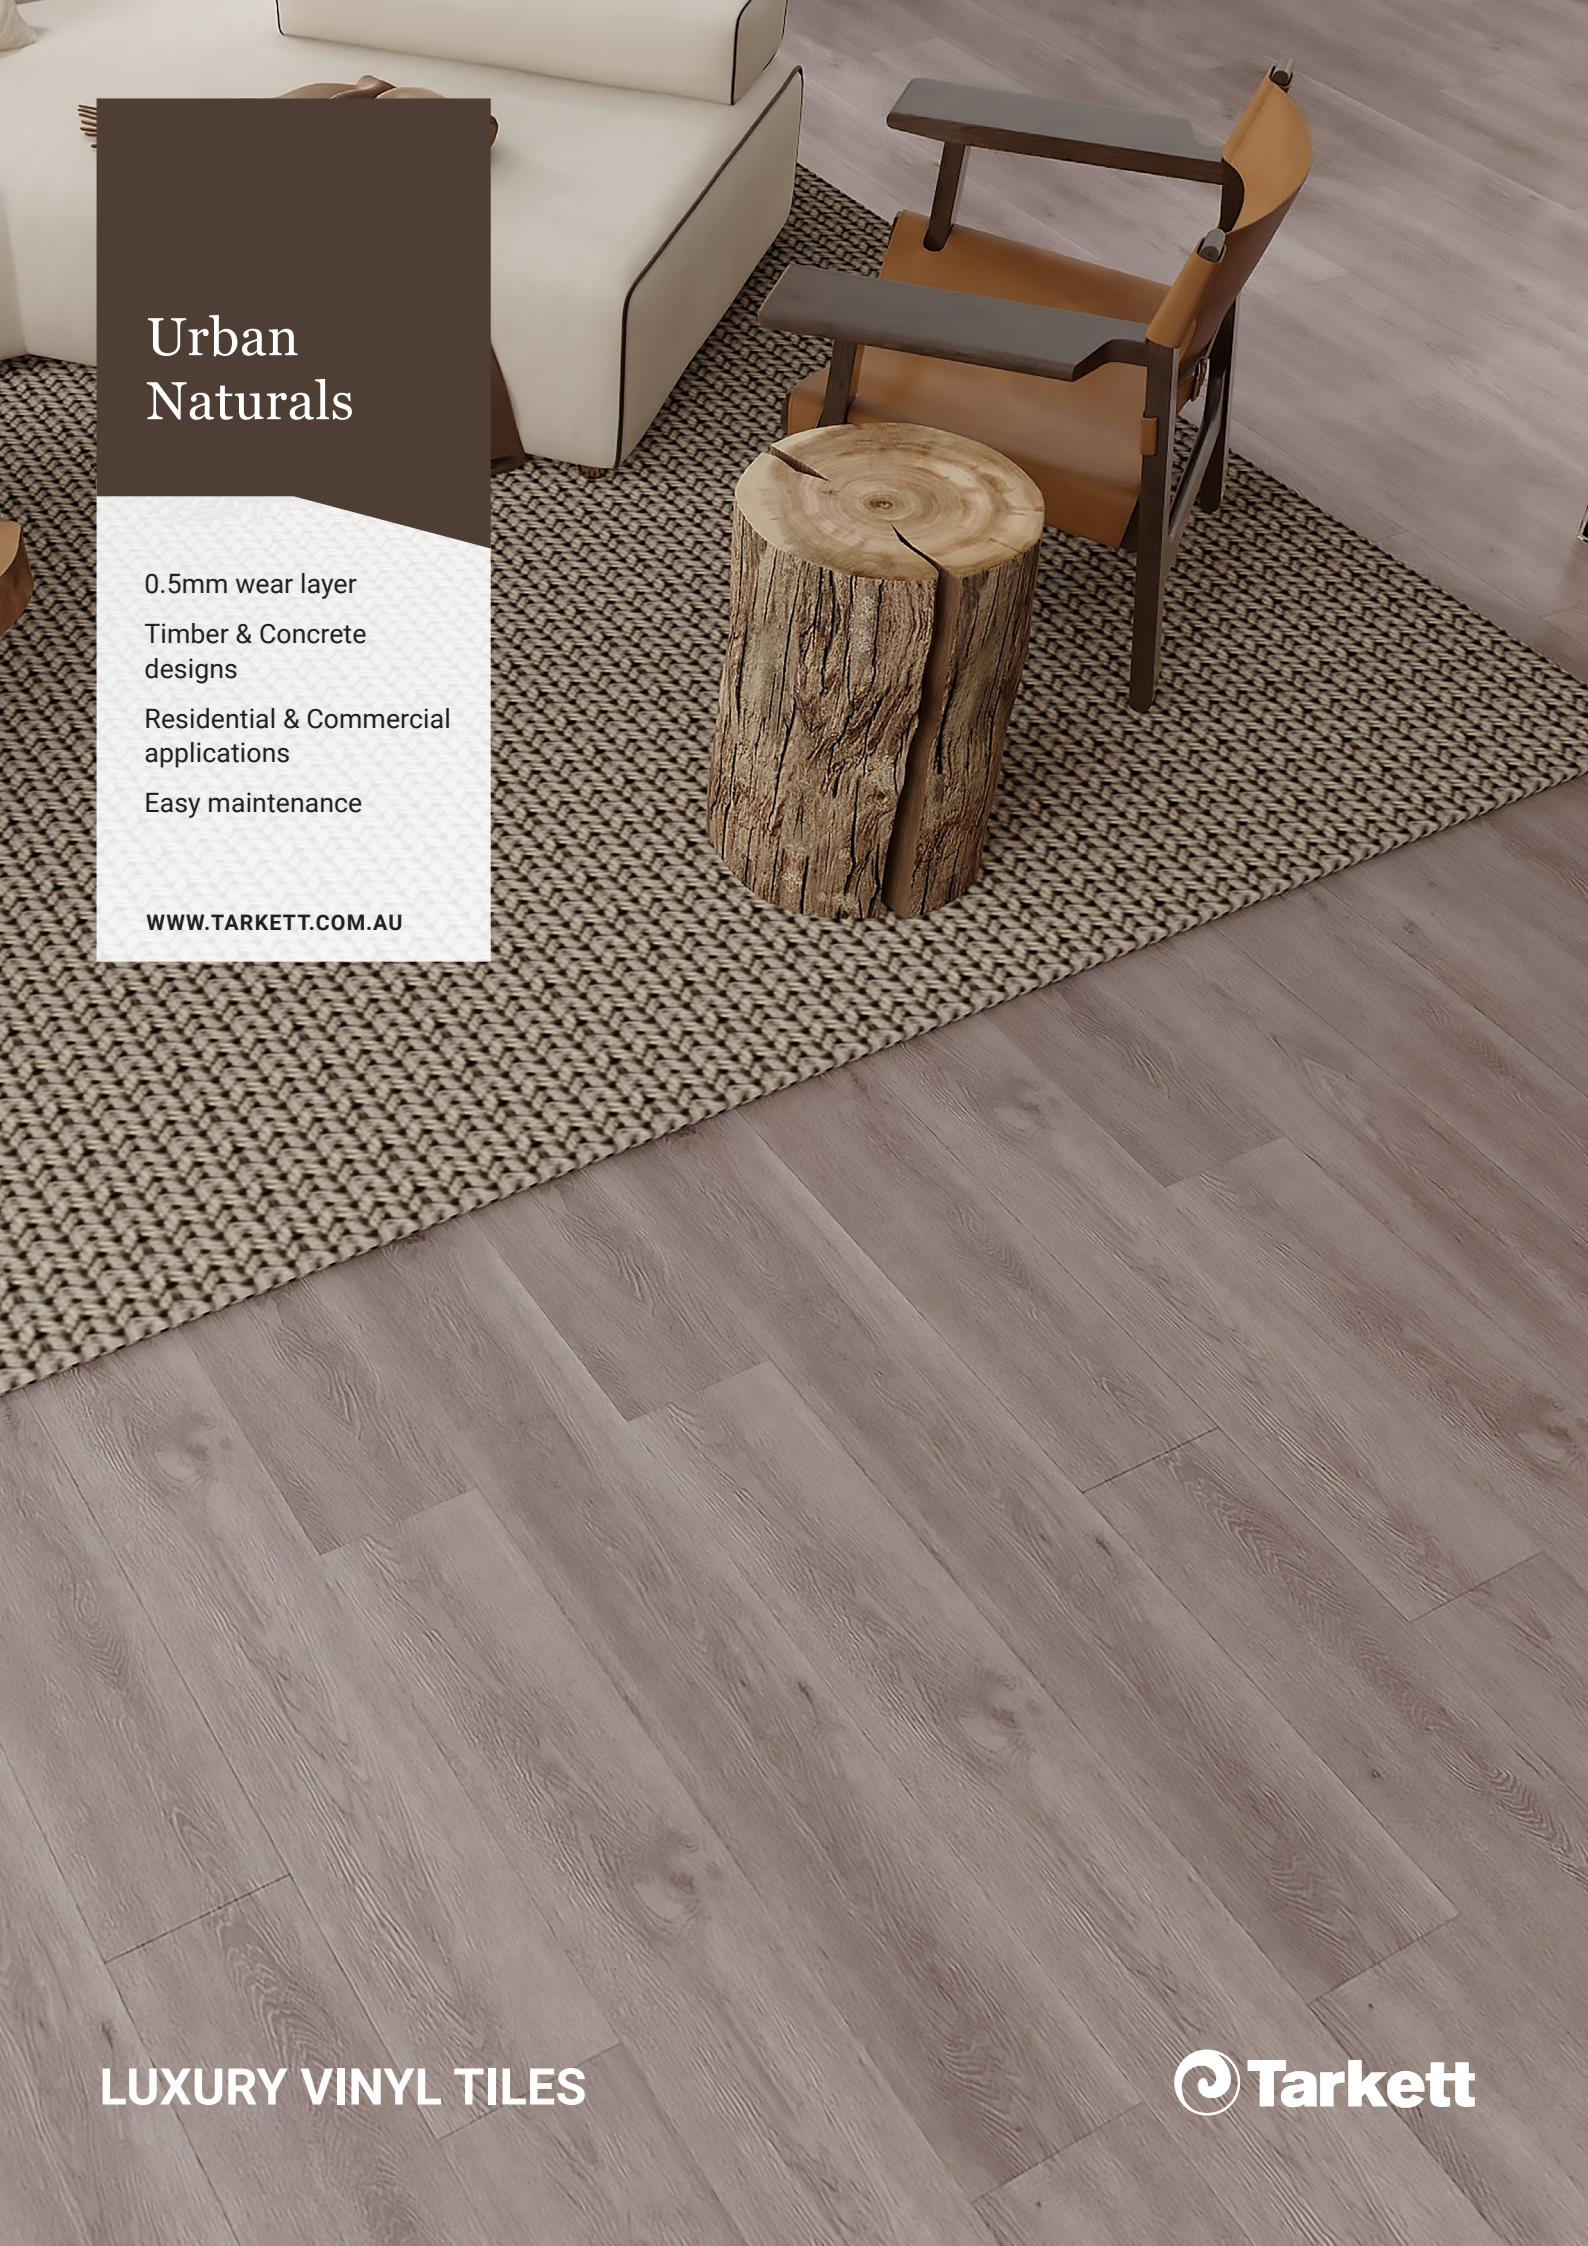

Urban Naturals

0.5mm wear layer

Timber & Concrete
designs

Residential & Commercial
applications

Easy maintenance

WWW.TARKETT.COM.AU

LUXURY VINYL TILES

 **Tarkett**

Urban Naturals

Technical Datasheet

Classification	Standards	Urban Naturals
Product Type	EN ISO 10582	Heterogeneous poly (vinyl chloride) floorcovering
Technical Characteristics	Standards	Urban Naturals
Total thickness	EN ISO 24346	2.5mm
Wear layer thickness	EN ISO 24340	0.5mm
Total weight	EN ISO 23997	4500 g/m ²
Wear Layer Binder content	EN ISO 10582	Type I
Surface treatment		UV Coating (Ceramic Bead)
Surface Restoration		Yes
Bevelled edges		Yes - Micro Bevel
Installation method		Glue-Down
Technical Performances	Standards	Urban Naturals
Dimensional stability	EN ISO 23999	≥ 0.25%
Curl resistant to heat	EN ISO 23999	+ 2.0mm
Reaction to fire	EN 13501-1	Critical radiant flux 10.4 kW/m ² Smoke 59%.min
Furniture leg	EN 424	No damage
Castor chair	EN ISO 4918	No damage
Impact sound reduction	EN ISO 717/2	ΔLw 4dB
Residual indentation	EN ISO 24343-1	≤ 0.10 mm
Thermal resistance	EN ISO 10456	0.008 m ² •K/W per single tile
Colour fastness to light	EN ISO 105-B02 (method 3 ^a)	≥6
Chemical resistance	EN ISO 26987	Class 0
Slip resistance	DIN 51130/EN 13893 AS 4586	R10 P3
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Static electrical propensity	EN 1815	Antistatic (≤ 2kV)
Side length	ISO 24342	Deviation ≤ 0.15% of normal length up to 0.5mm maximum
Width	ISO 24342	Deviation ≤ 0.15% of normal length up to 0.5mm maximum
Squareness and straightness	ISO 24342	≤ 0.35mm
Opening between elements	ISO 10582	Average ≤ 0.10mm Individual values ≤ 0.15mm
Height difference	ISO 10582	Average ≤ 0.10mm Individual values ≤ 0.15mm
Gloss retention	EN 16094 A	Rating 1
Gloss	ISO 2813	+ 2
Micro - scratch resistance	EN 16094 A	≥ 2000g
Scratch resistance	ISO 1518-1	≥ Rating 2
Sustainability Performances	Standards	Urban Naturals
Formaldehyde emission	EN 717-1	E1
Heavy metal	EN 71-3	Not detected
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		7.04kg CO ₂ eq /m ²
Phthalate		Not Detected
Total VOC emissions	AGBB A+	Pass
Dimensions	Standards	Urban Naturals
Tiles		457 x 457mm - 12 tiles/box = 2.51m ²
Planks		190 x 1227.8mm - 12 planks/box = 2.80m ²

The above information is subject to modification for the benefit of further improvement. (05/25). Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please note the the products in the photos are installed for creative purposes and not according to technical specifications.

