

RCR15 SERIES SINGLE SPINDLE ROTARY CUTTERS

HP REQUIRED
20-60 HP

CUTTING CAPACITY
2"

HITCH
Cat. 1 & 1 Ltd.



CUTTERS

Efficient handling and dispersing of material.

For small acreage owners looking for a heavier cutter, Land Pride offers the RCR1548. It features a 2" cutting capacity, a high blade tip speed, and larger gearbox than the RCR12. Ideal for maintenance of lanes, pastures, and other rough-cut areas.



	RCR1548
Horsepower	20-60 HP
Hitch	Cat. 1 & Cat. 1 Limited
Working Width (cm)	47-1/2" (121)
Overall Width	53-1/2"
Overall Length	91-3/4"
Weight - lb (kg)	424 (192)
Cutting Height	1-3/4" - 11-1/2"
Cutting Capacity	2" Diameter
Deck Thickness	12 Gauge
Deck Height	7-1/4"
Safety Guards	Rubber Front and Rear
Skids	1/4" x 2" Weld on
Blades	1/2" x 3" Heat Treated Alloy Steel Free Swinging Blades
Blade Tip Speed	13,090 fpm
Dishpan	Round 10 Gauge x 24" Diameter, Dish Shaped
Gearbox Rating [^]	65 HP
Gearbox	540 RPM PTO Driven Gearbox Cast Iron Housing
Driveline	Cat. 3, Standard - 1/2" Shear Bolt Protection Optional - Bolt 2 Plate Slip Clutch
Tailwheel	4" x 16" Molded Rubber Tire
Colors	



Round back design helps discharge grass better than enclosed or partially enclosed cutters. The fully welded deck adds additional strength.

5 YEAR
LIMITED GEARBOX
WARRANTY



Two position floating top link offers greater lifting leverage for subcompact tractors, and allows deck to hug the terrain.



10 Gauge stump jumper allows cutter to slide over obstructions protecting the gearbox output shaft.



Heavy-duty 1-1/4" spindle on the tailwheel gives strength to protect the tailwheel assembly.

*See dealer for complete warranty information. ^Based on field performance.


QUICK HITCH
SYSTEM

www.landpride.com 13

RCR1548 Rotary Cutters

Specifications & Capacities

Implement weight (with front guard)	424 lbs (192.3 kg)
Hitch	Category 1 & Category 1 limited, Quick Hitch ready
Cutting width	47 1/2" (1.21 m)
Overall width	53 1/2" (1.36 m)
Overall length (including tailwheel)	91 3/4" (2.33 m)
Deck height (Bottom of deck to bottom of skid shoe)	7 1/4" (18.4 cm)
Cutting height	1 3/4" - 11 1/2" (4.4 cm - 29.2 cm)
Cutting capacity	2" (5.1 cm) (Grass, weeds & light brush)
Recommended tractor hp	20-50 hp (14.9-37.3 kw)
Power take-off speed	540 rpm
Gearbox hp rating	50 hp (37.3 kw)
Gearbox with speed up beveled gears	540 input rpm gearbox 1:1.93 Cast iron housing
Gearbox oil capacity & lubrication	4.5 Pints (2.13 L) of gear lube 80-90w EP
Deck construction	One piece reinforced deck
Deck material thickness	12 Gauge (2.7 mm)
Skids shoes	1/4" X 2" (6 mm x 5.1 cm) Weld-on
Stump jumper	Round pan 10 ga. x 24" (61.0 cm)
Blades (2)	1/2" x 3" (1.3 cm x 7.6 cm) Heat treated alloy steel Free-swinging blades
Blade bolts	Keyed with harden flat washer and locknut
Blade tip speed	13,090 fpm (66.5 mps)
Driveline	ASAE Category 3
Driveline protection	Standard 1/2" (13 mm) center shearbolt protection Optional - Center bolt 2 plate slip clutch
Tailwheel	4" x 16" Solid rubber tire
Safety guards (Optional)	Rubber (front and rear)

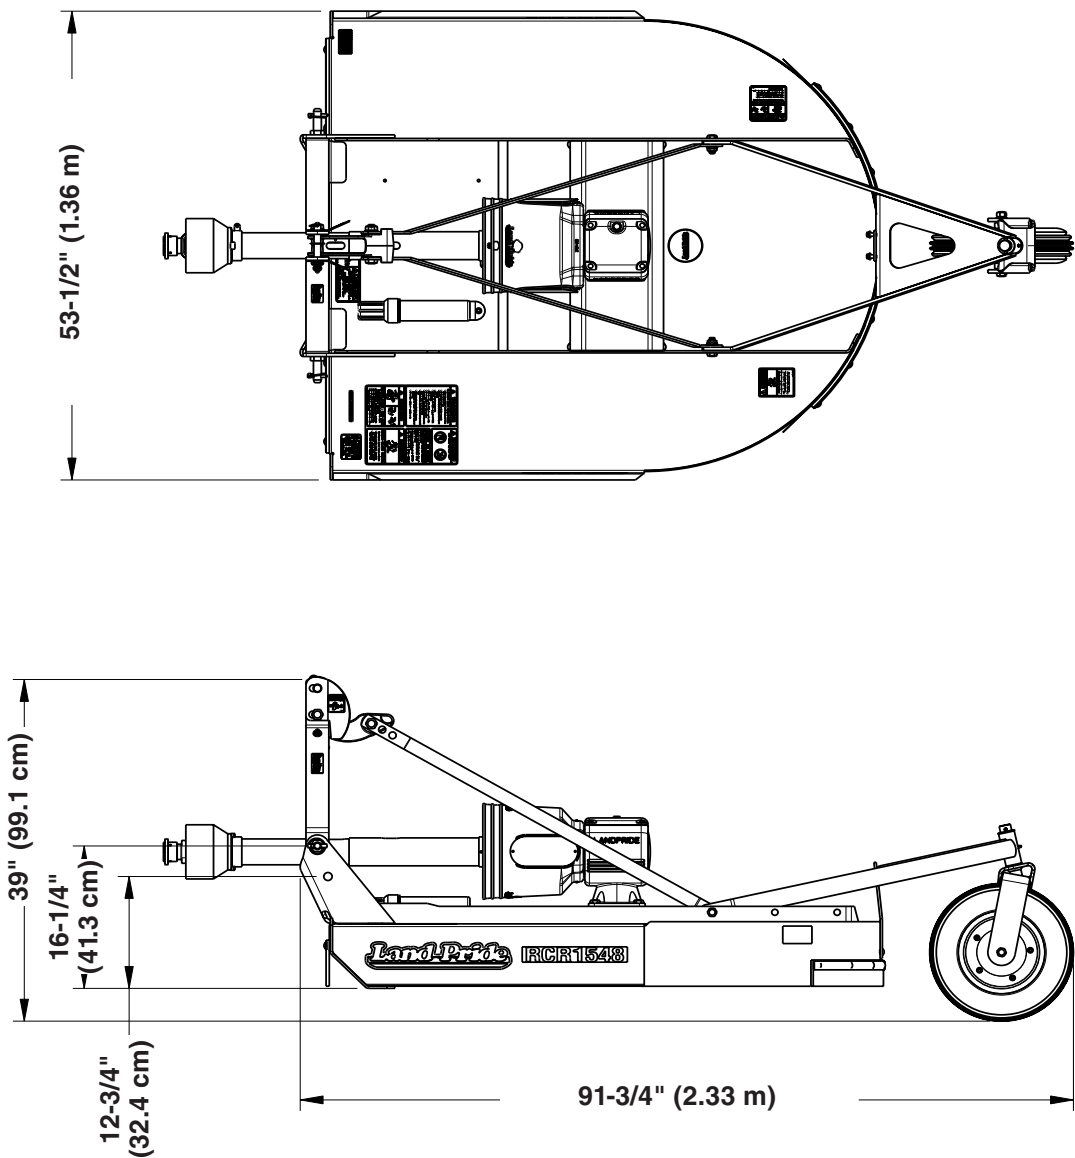

30246