


PRODUCT INFORMATION

- Heavy duty cord operated system, with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Quick installation with "Smart Klick" brackets for wall and ceiling applications.
- Bendable; it can be curved and reversed curved with a 20 cm (8") radius or continuous curve.
- Heavy duty clickable carriers - 10 carriers on a breakaway strip - UV protected.
- Maximum fabric weight: 8 kg. per mtr (5,3 LBS per ft).
- Colours available: white
- Track finish: chromated powder coating with a factory applied patented dry lubricant.
- Lengths available: 3.66 m (12'), 4.27 m (14'), 4.88 m (16'), 6.10 m (20').
- Same brackets as used with Klick System.
- Warranty: 10 years.

PROFILE


- Shown actual size 1:1
- Aluminium Extrusion
- Dimensions: 20 mm x 20 mm (3/4" x 3/4")



Easy installation
click - position - tighten




Clickable carrier

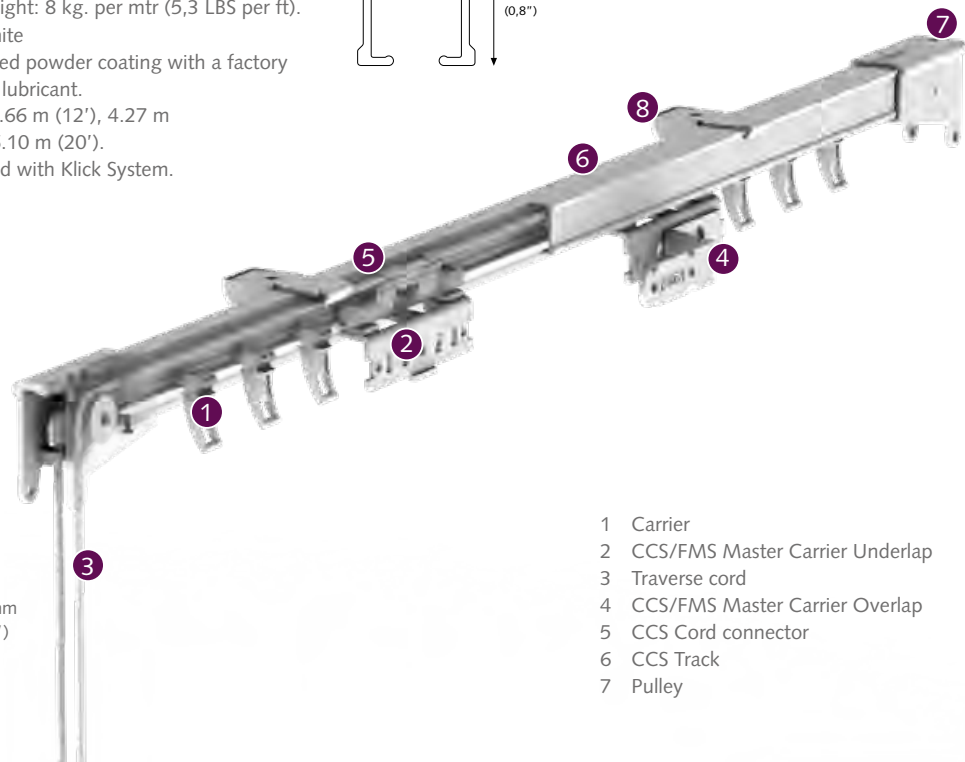

- 1 Carrier
- 2 CCS/FMS Master Carrier Underlap
- 3 Traverse cord
- 4 CCS/FMS Master Carrier Overlap
- 5 CCS Cord connector
- 6 CCS Track
- 7 Pulley

APPLICATIONS

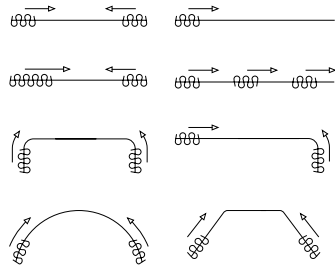

BENDING / CURVING

The track can be curved and reversed curved using a 20 cm (8") radius. Continuous curving can be done with the electric powered bender or by special order from factory.




FOR USE IN

Hotels - motels - offices - healthcare - schools - residential or any location where a heavy duty cord traverse system is required.

MOUNTING BRACKETS

SK Ceiling Bracket


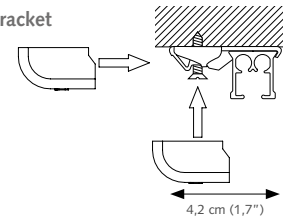


A) Min. 20 cm (8")



SK Aluminium Wall Bracket single

A) 7,5 cm (3") B) 6,3 cm (2,5")
A) 10 cm (4") B) 8,8 cm (3,5")

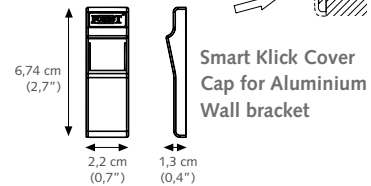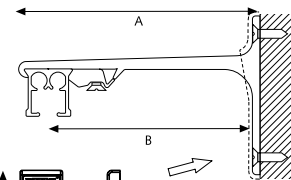

Brackets need to placed every 50 - 60 cm (20"), depending on fabric weight.