

# Environmental Product Declaration

IN ACCORDANCE WITH ISO 14025:2006  
AND EN 15804:2012+A2:2019/AC:2021

**COLORSTEEL MAXAM® 0.4mm**



Programme: **The International EPD System** | [environdec.com](http://environdec.com)

Programme Operator: **EPD International AB**

Licensee: **EPD Australasia** | [epd-australasia.com](http://epd-australasia.com)

Type of EPD: **EPD of a single product from a manufacturer**

EPD Registration number: **EPD-IES-0022699:001**

Version date: **2025-09-30**

Validity date: **2030-09-30**

An EPD may be updated or depublished if conditions change.  
To find the latest version of the EPD and to confirm its validity,  
see [www.environdec.com](http://www.environdec.com).

# Information about EPD Owner

New Zealand Steel's (NZS) Glenbrook mill, located about 60 km south of Auckland, is a fully integrated steel plant that produces flat rolled steel products. It's unique in that it uses locally sourced ironsand as its ore and is the sole producer of such products in New Zealand. The mill produces around 670,000 tonnes of steel annually, which is used in various sectors like building, construction, manufacturing, and agriculture.

The NZS site holds AS/NZS ISO 9001 "Quality Management System" and AS/NZS ISO 14001 "Environmental Management System" certifications. Its various steel products also achieve Eco Choice certifications; Flat and Long Steel Products EC-41-15 and Pre-Painted Steel Products EC-57.



## Manufacturing & Processing in New Zealand

New Zealand Steel is in the process of installing an electric arc furnace (EAF) which will replace the current oxygen based steelmaking process via the Klockner Oxygen Blown Maxhutte (KOBM). This marks a significant decarbonisation step change in the steelmaking process by enabling large scale incorporation of external scrap, replacing a significant amount of primary iron requirements. This EPD reflects the significance of this upcoming change, and the need to produce this specific EPD for product not yet on the market.

The EAF is planned to begin commissioning in late 2025, and be fully operational in early 2026. This change is expected to reduce site emissions by up to 1Mt of CO2 annually (RNZ, 2024). All steel will be produced via the EAF, which can accept a combination of molten pig iron (produced from iron sand) or secondary steel scrap (post-industrial/post-consumer). This will also enable the production of very low emissions steel made with 100% scrap at the EAF.

New Zealand Steel manufactures steel from raw and recycled materials using an 'integrated steelmaking' method. This involves the use of ironsand, coal, steel scrap, fluxes (limestone) and alloying materials to produce steel slab via multi hearth, rotary kilns, melters, KOBM steelmaking and continuous slab casting, prior to hot rolling, cold rolling, metal coating and painting.

| Information about EPD Owner |                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Declaration Owner:          | <div><div><div><b>New Zealand Steel</b><br/>Web: <a href="http://www.nzsteel.co.nz">www.nzsteel.co.nz</a><br/>Email: <a href="mailto:info@colorsteel.co.nz">info@colorsteel.co.nz</a><br/>Phone: 0800 697 833<br/>Post: Private Bag 92121, Auckland 1142, New Zealand</div><div></div></div></div>                       |
| Life Cycle Assessment (LCA) |                                                                                                                                                                                                                                                                                                                                                                                                               |
| LCA Accountability:         | <div><div><div>thinkstep Ltd<br/>Barbara Nebel<br/>Gaya Gamage<br/>Web: <a href="http://www.thinkstep-anz.com">www.thinkstep-anz.com</a><br/>Email: <a href="mailto:info@thinkstep-anz.com">info@thinkstep-anz.com</a><br/>Post: 11 Rawhiti Road, Pukerua Bay, Wellington 5026, New Zealand</div><div></div></div></div> |
| Geographical Scope:         | New Zealand                                                                                                                                                                                                                                                                                                                                                                                                   |
| Reference Year for Data:    | 2023-07-01 to 2024-06-30                                                                                                                                                                                                                                                                                                                                                                                      |
| Version History:            | 001 (2025-09-30) Original version of the EPD                                                                                                                                                                                                                                                                                                                                                                  |

## Product Information

This EPD is valid for one metre square (1m<sup>2</sup>) of COLORSTEEL MAXAM® manufactured by New Zealand Steel.

### Product covered by EPD

COLORSTEEL MAXAM® is a next generation, single solution roofing and cladding product, designed for enhanced durability and corrosion resistance for most New Zealand environmental conditions.

This EPD sets out information on the average COLORSTEEL MAXAM® product manufactured by New Zealand Steel, in a base metal thickness of 0.4mm.

The product range represented by this EPD only includes COLORSTEEL MAXAM®. It excludes all other COLORSTEEL® products, such as COLORSTEEL® Metallic, COLORSTEEL® CP, and COLORSTEEL® G2.

The COLORSTEEL® products represented in this EPD consist of a steel substrate that is coated with a metallic coating incorporating BlueScope's Activate® technology (hot dipped aluminium, zinc, and magnesium alloy AM150 coating) to provide enhanced corrosion resistance, and then further protected and enhanced with a specially developed, exterior-grade, oven-baked paint system.

The metallic coated base steel (G300 or G550 strength grade), conforms to AS 1397:2021 Continuous hot-dip metallic coated steel sheet and strip - Coatings of zinc and zinc alloyed with aluminium and magnesium.

The paint system meets the performance requirements of AS/NZS 2728:2013 Prefinished/pre painted sheet metal products for interior/ exterior building applications - Performance requirements.



Table 1: Product Description and characteristics

| Product           | Steel category                                                                                                                                                                                                                    | Key performance characteristics                                                                                                                                                                                                                                                                        |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| COLORSTEEL MAXAM® | Maxam® is metallic coated steel with an organic coating applied to both surfaces. It is available in a range of thicknesses, tensile strengths, and widths. Suitable for roofing, wall cladding, rainwater goods and accessories. | <ul style="list-style-type: none"><li>– Colour retention is 8 units maximum after 10 years exposure</li><li>– Chalk rating is no more than 4 after 10 years exposure</li><li>– Metal coating is AM150 consistent with AS 1397:2021</li><li>– Product Type 6 consistent with AS/NZS 2728:2013</li></ul> |

Table 2: Industry Classification

| Product           | Classification | Code | Category                     |
|-------------------|----------------|------|------------------------------|
| COLORSTEEL MAXAM® | UN CPC Ver.2   | 412  | Products of iron or steel    |
|                   | ANZSIC 2006    | 2711 | Iron and Steel Manufacturing |

# Content Declaration

The typical steel composition, product content and packaging for 1m<sup>2</sup> of COLORSTEEL MAXAM® (declared unit) is given below.

**Table 3: Typical steel composition for 1 kg of product**

| Components   | Mass (kg) |
|--------------|-----------|
| Iron         | >97       |
| Manganese    | <0.8      |
| Silicon      | <0.05     |
| Chromium     | <0.1      |
| Carbon       | <0.1      |
| Other        | <0.1 each |
| <b>TOTAL</b> | <b>1</b>  |

## COLORSTEEL® products via KOBM

**Table 4: Content declaration for 1m<sup>2</sup> of COLORSTEEL MAXAM®**

| Product Composition | Material         | Mass (kg)      | Post-consumer recycled material, mass-% of product | Biogenic material, mass-% of product | Biogenic material, kg C/product or declared unit |
|---------------------|------------------|----------------|----------------------------------------------------|--------------------------------------|--------------------------------------------------|
| Steel Substrate     | Carbon steel     | 3.14           | 0                                                  | 0                                    | 0                                                |
| Metal Coating       | Coating mass     | 0.153          | 0                                                  | 0                                    | 0                                                |
|                     | <i>Aluminium</i> | <i>0.0842</i>  | 0                                                  | 0                                    | 0                                                |
|                     | <i>Magnesium</i> | <i>0.00153</i> | 0                                                  | 0                                    | 0                                                |
|                     | <i>Zinc</i>      | <i>0.0627</i>  | 0                                                  | 0                                    | 0                                                |
|                     | <i>Silicon</i>   | <i>0.00459</i> | 0                                                  | 0                                    | 0                                                |
| Paint Coating       | Paint            | 0.05           | 0                                                  | 0                                    | 0                                                |
| <b>TOTAL</b>        |                  | <b>3.35</b>    | <b>0</b>                                           | <b>0</b>                             | <b>0</b>                                         |

**Table 5: Content declaration of Packaging for 1m<sup>2</sup> of COLORSTEEL MAXAM®**

| Packaging Materials | Mass (kg)       | Mass-% (versus the product) | Biogenic material, kg C/ product or declared unit |
|---------------------|-----------------|-----------------------------|---------------------------------------------------|
| Plastic film        | 6.47E-03        | 0.19%                       | 0                                                 |
| Paper               | 2.50E-04        | 0.01%                       | 1.13E-04                                          |
| Steel               | 3.05E-05        | 0.00%                       | 0                                                 |
| HDPE                | 1.71E-03        | 0.05%                       | 0                                                 |
| Timber              | 1.93E-03        | 0.06%                       | 8.09E-04                                          |
| <b>TOTAL</b>        | <b>1.04E-02</b> | <b>0.31%</b>                | <b>9.21E-04</b>                                   |

## Dangerous substances from the candidate list of SVHC for Authorisation

The product declared within this EPD:

- Does not release dangerous substances to soil and water
- Does not contain hazardous substances requiring labelling
- Does not contain materials identified in the European Chemicals Agency's Candidate List of Substances of Very High Concern in the products at a concentration greater than 0.1% (ECHA, 2022).

# Life Cycle Assessment (LCA) Information

## Declared Unit

The declared unit for the EPD is 1m<sup>2</sup> of flat product.

**Table 6: Conversion to mass**

| Product                  | Metallic Coating | Base Metal Thickness (mm) | Product Mass (kg/m <sup>2</sup> flat product) |
|--------------------------|------------------|---------------------------|-----------------------------------------------|
| <b>COLORSTEEL MAXAM®</b> | AM150            | 0.4                       | 3.35                                          |

## System boundaries

As shown in the table below, this EPD is of the type Cradle to gate with modules C1–C4 and module D (A1–A3 + C + D). Other life cycle stages (Modules A4–A5, B1–B7) are dependent on particular scenarios and best modelled at the building level.

**Table 7: Modules included in the scope of the EPD**


|                         | Product stage       |                            |               | Distribution/<br>installation stage |                             | Use stage |             |        |             |               |                        |                       | End-of-life stage           |                               |                  |          | Beyond product life cycle              |
|-------------------------|---------------------|----------------------------|---------------|-------------------------------------|-----------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-----------------------------|-------------------------------|------------------|----------|----------------------------------------|
|                         | Raw material supply | Transport of raw materials | Manufacturing | Transport to customer               | Construction / installation | Use       | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction, demolition | Transport to waste processing | Waste processing | Disposal | Reuse / recovery / recycling potential |
| <b>Module</b>           | A1                  | A2                         | A3            | A4                                  | A5                          | B1        | B2          | B3     | B4          | B5            | B6                     | B7                    | C1                          | C2                            | C3               | C4       | D                                      |
| <b>Modules declared</b> | X                   | X                          | X             | ND                                  | ND                          | ND        | ND          | ND     | ND          | ND            | ND                     | ND                    | X                           | X                             | X                | X        | X                                      |
| <b>Geography</b>        | GLO                 | GLO                        | NZ            |                                     |                             |           |             |        |             |               |                        |                       | NZ                          | NZ                            | NZ               | NZ       | GLO                                    |

X = included in the EPD; ND = Module not declared (such a declaration shall not be regarded as an indicator result of zero)

Product system process flow diagram



A1 - A3 Manufacturing Process

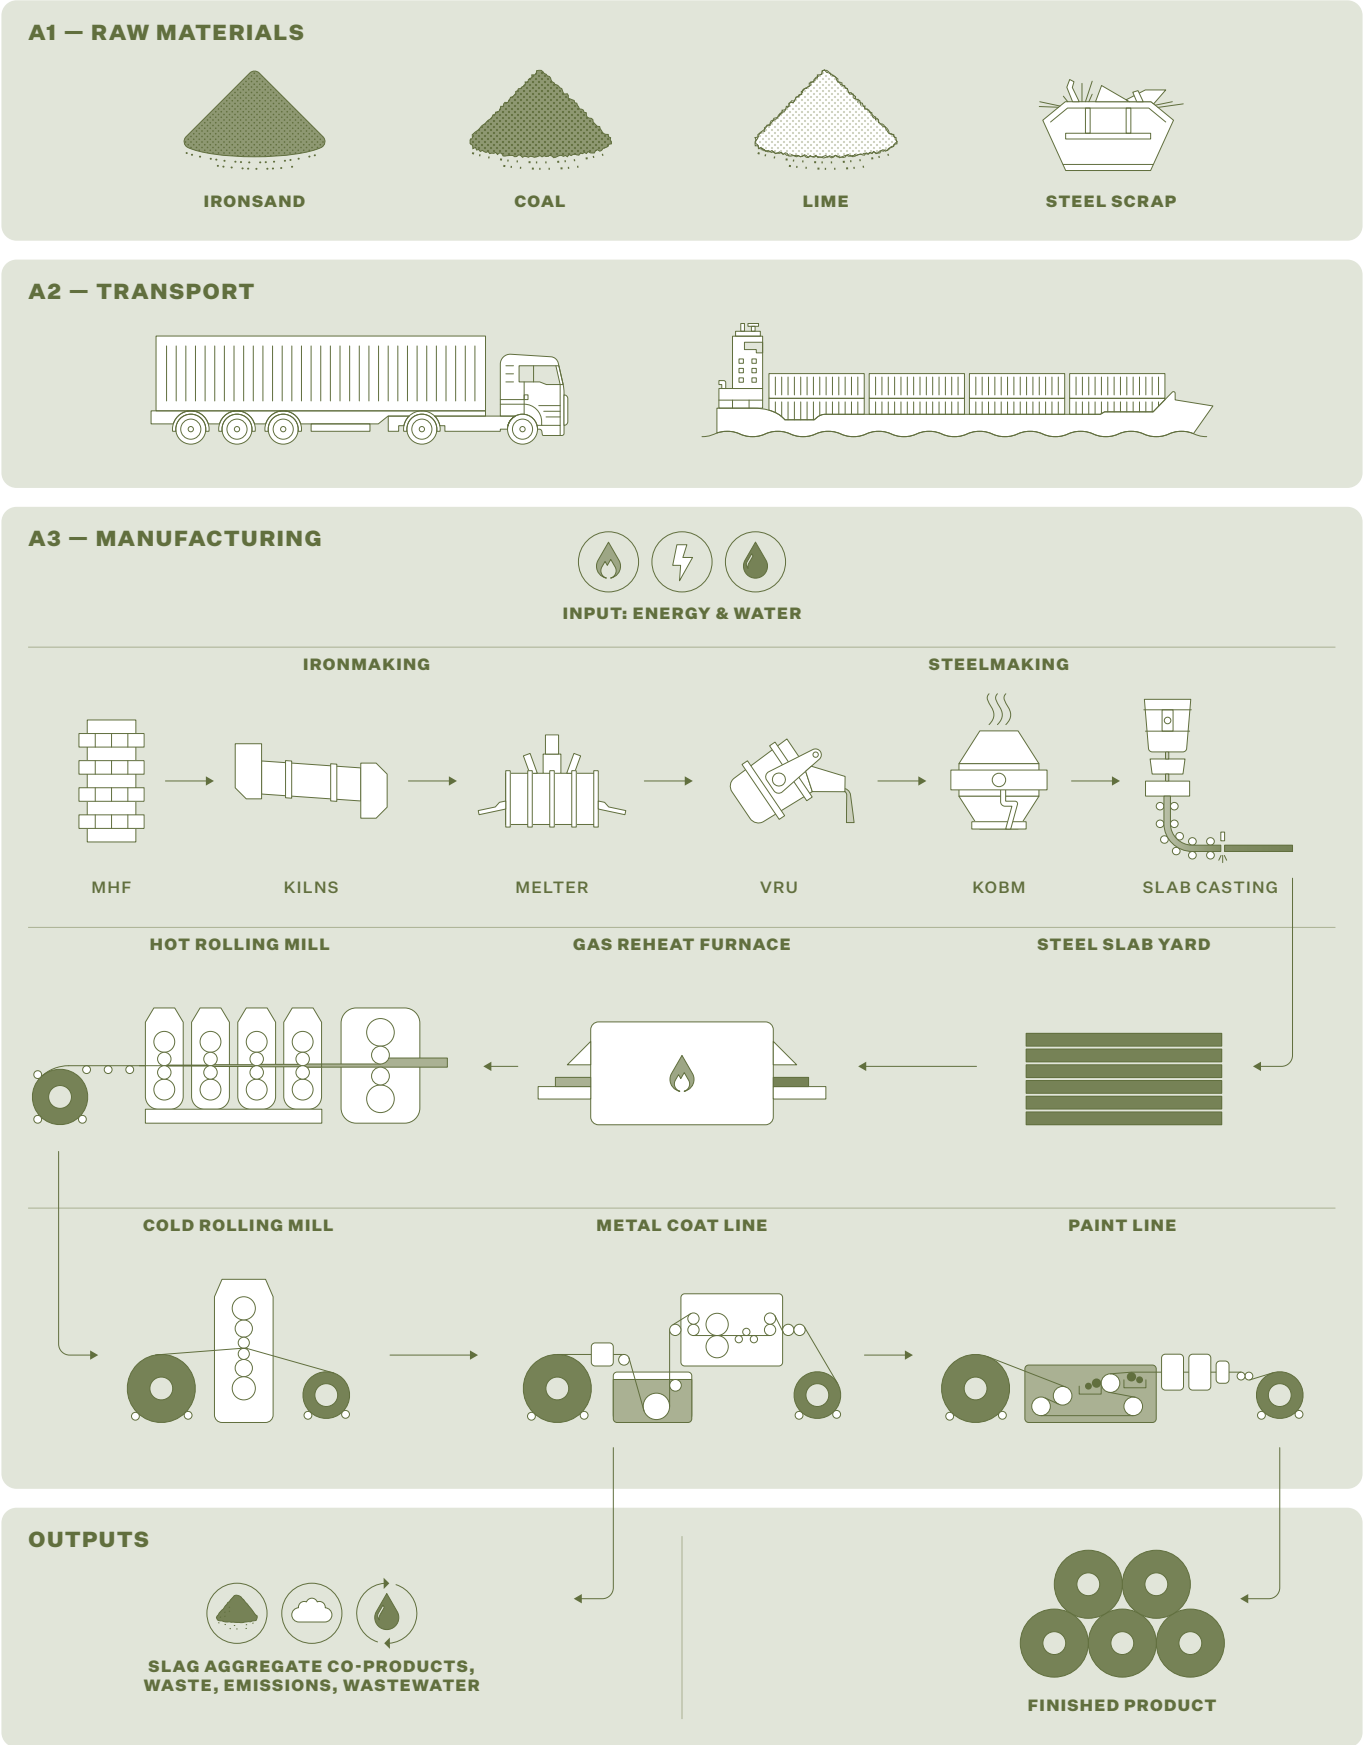

## Life Cycle Assessment (LCA) Methodology

The underlying LCA model was developed using the Life Cycle for Expert (LCA FE) software version 10.9.1.17 (formerly known as GaBi Software) for life cycle engineering, developed by Sphera Solutions, Inc.

Data for all energy inputs, transport processes and raw materials are from the Managed LCA Content (MLC) Database 2024.2 (Sphera, 2024). Most datasets have a reference year between 2020 and 2023, and therefore, all datasets are within the 10-year limit allowable for generic/secondary data under EN 15804 and the PCR.

### Electricity

Electricity for primary iron making was based on New Zealand Steel's cogeneration plants. Steel making (KOBM) and downstream processes use purchased electricity. New Zealand Steel does not purchase specific electricity mixes that provide Guarantee of Origin. Therefore, the residual electricity mix on the market is used for A1 and A3 processes that NZ Steel has control over.

The composition of the residual electricity grid mix of New Zealand is modelled in LCA FE 2024.2 based on published data for the year 2021-04-01 - 2022-03-31 (BraveTrace, 2023). The New Zealand residual electricity mix is made up of hydro (56.6%), geothermal (19.7%), natural gas (12.5%), wind (6.55%), coal (4.25%), biomass (0.266%) and biogas (0.160%). Onsite consumption (3.00%), and the medium voltage (1kV-60kV) grid's transmission and distribution losses (3.17%) are calculated based on data from the Ministry of Business, Innovation & Employment (MBIE, 2023). The emission factor for the New Zealand residual grid mix for the GWP-GHG indicator is 0.146 kgCO<sub>2</sub>e/kWh (based on EF3.1).

Location-based grid mix is used for other electricity consumption including Modules C and D. The emission factor for the New Zealand location-based grid mix for the GWP-GHG indicator is 0.143 kg CO<sub>2</sub>e/kWh (based on EF3.1).

### Modelling of infrastructure/capital goods

Capital goods and infrastructure associated with electricity have been included in the background datasets as provided by the Managed LCA Content (MLC) database (Sphera, 2024). Infrastructure/capital goods associated with all other upstream, core and downstream processes have been excluded.

## Allocation

Life cycle inventory data was provided specifically per process. From the iron making stage, economic allocation is applied to processes where steel scrap outputs and slags produced are sold. Allocation was not required for other processes such as mining. Sub-metered electricity usage was available per process (e.g., for iron making, steel making, hot strip milling). Where submetering did not exist, electricity is allocated based on output mass.

For metal coating and painting, relevant physical quantities, predominantly the mass of throughput (e.g. steel coil) or surface area of the coil (e.g. surface coatings) are used in allocation. For example:

- Metal coating: Aluminium, zinc and magnesium are allocated based on the quantities required for coating a specific area to a selected coating thickness.
- Painting: The inputs and outputs of painting per specific product were allocated based on the physical relationship per type of coating. The amount of topcoat, backer and primer are calculated based on their respective application rates. The painting process inventory such as natural gas, electricity, steel, etc. are allocated based on coated area and production volume (mass).

The packaging materials are allocated by mass across the total output of packaged products.

### Recycling and recycled inputs

There is no post-industrial or post-consumer scrap input into the system as the KOBM uses only iron made from ironsand. However, a small proportion of scrap generated from downstream processes are internally recycled (closed loop). Steel scrap outputs that are sold are economically allocated using economic value of product and scrap output at each stage of production.

## Data Quality Assessment

A data quality assessment that complies with EN 15941 (CEN, 2024) was done as part of the LCA study.

**Table 8: Data sources and share of primary data**

| Process                                                                          | Source type                 | Source      | Reference year | Data category | Share of primary data, of GWP-GHG results for A1-A3 |
|----------------------------------------------------------------------------------|-----------------------------|-------------|----------------|---------------|-----------------------------------------------------|
| Process emissions from manufacturing (from mining to painted product)            | Collected data and database | EPD owner   | 2019-2023      | Primary       | 64.0%                                               |
| Natural gas used in the manufacturing process (from mining to painted product)   | Collected data and database | EPD owner   | 2024           | Primary       | 8.1%                                                |
| Other fuels used in the manufacturing process (from mining to painted product)   | Collected data and database | EPD owner   | 2024           | Primary       | 0.4%                                                |
| Electricity used in the manufacturing process (from mining to painted product)   | Collected data and database | MLC v2024.1 | 2024           | Primary       | 4.4%                                                |
| Raw materials used in the manufacturing process (from mining to painted product) | Collected data and database | MLC v2024.1 | 2024           | Secondary     | 0.0%                                                |
| Transport of raw materials to site                                               | Collected data and database | MLC v2024.1 | 2024           | Primary       | 0.2%                                                |
| Other processes                                                                  | Collected data and database | MLC v2024.1 | 2019-2023      | Secondary     | 0.0%                                                |
| <b>Packaging</b>                                                                 | Collected data and database | MLC v2024.1 | 2019-2023      | Secondary     | 0.0%                                                |
| <b>TOTAL SHARE OF PRIMARY DATA*, OF GWP-GHG RESULTS FOR A1-A3</b>                |                             |             |                |               | <b>77.1%</b>                                        |

\* The share of primary data is calculated based on GWP-GHG results. It is a simplified indicator for data quality that supports the use of more primary data, to increase the representativeness of and comparability between EPDs. Note that the indicator does not capture all relevant aspects of data quality and is not comparable across product categories.

### Time, geographical and technical representativeness

New Zealand Steel's Life Cycle Inventory (LCI) is based on a mix of data periods. All critical processes (i.e. processes with high contribution to environmental impact) are based on data from 2023-07-01 to 2024-06-30. Other processes (minimal contribution to environmental impact) reflect data for the period from 2018-07-01 to 2019-06-30. These processes have not seen process changes over the years and remain valid.

The quality of data used for modelling (both specific and generic data as per EN15941) is at least fair. No poor or very poor data is used. The use of fair data with more than 30% impact contribution to any core indicator is disclosed in Table 9.

All specific data (e.g. inbound transport, mining, iron making and steel-making, etc.) come from New Zealand Steel in Waikato North Head mine in Waikato and Glenbrook Steelworks at Glenbrook, Auckland, New Zealand. Production and end-of-life stages are modelled for New Zealand. The default factors from the PCR are used to model module C. International datasets have been used for inputs purchased internationally or where location specific datasets were unavailable. Data taken from the MLC database reflects average or generic production and therefore does not correspond to actual New Zealand Steel suppliers.

# Environmental Product Declaration

## COLORSTEEL MAXAM® 0.4mm

Table 9: Data quality information

| Data set  | Criteria and data quality level         | Reason for level                 | Reason for using    | Relevance                                              |
|-----------|-----------------------------------------|----------------------------------|---------------------|--------------------------------------------------------|
| Aluminium | Geographical - Fair<br>Technical - Fair | Proxy or generic background data | Best available data | 50% of ODP<br>0-15% of other core impact indicators    |
| Magnesium |                                         |                                  |                     | 42% of ADPm&m<br>2-17% of other core impact indicators |
| Zinc      |                                         |                                  |                     | 53% of ADPm&m<br>0-8% of other core impact indicators  |

## Modelling beyond A1-A3

The processes below are included in the product system to be studied. For modules beyond A3, the scenarios included are currently in use and are representative for one of the most probable alternatives.

### End of Life (Modules C1-C4)

The recycling scenario in this EPD was based on a steel recycling report for New Zealand Heavy Engineering Research Association (HERA), where it was estimated that 85% of steel scrap from the building and infrastructure sector is recovered (thinkstep-anz, 2021). This is used for all products in this EPD and is considered conservative. Results for 100% landfill and 100% recycling are provided as per PCR 2019:14.

End-of-life Modules (C1 – C4) were modelled based on default data from PCR 2019:14 (EPD International, 2025b). End-of-life allocation follows the requirements of EN15804:2012+A2:2019 (CEN, 2021) section 6.4.3.3.

Table 10: End-of-Life scenarios for products

| Process                                                   | Unit                                                                                                                                                                                                                                                                                                                                                                                                                  |                         |                           |
|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------------------------|
|                                                           | EOL Main Scenario                                                                                                                                                                                                                                                                                                                                                                                                     | 100% Recycling Scenario | 100% Landfilling Scenario |
| Collection process specified by type                      | 1 m <sup>2</sup> of product collected with mixed construction waste                                                                                                                                                                                                                                                                                                                                                   |                         |                           |
| Recovery system specified by type                         | 85% for recycling                                                                                                                                                                                                                                                                                                                                                                                                     | 100%                    | 0%                        |
| Disposal specified by type                                | 15% for landfilling                                                                                                                                                                                                                                                                                                                                                                                                   | 0%                      | 100%                      |
| Assumptions for scenario development, e.g. transportation | C1 - Demolition/deconstruction of steel – diesel use of 1.1 kWh/tonne<br>C2 - 80 km of transport by truck<br>C3 - Loading and unloading at sorting facility (diesel use of 1.8 kWh/tonne); Fragging of steel (diesel use of 7.4 kWh/tonne); Mechanical sorting (electricity use of 2.2 kWh/tonne).<br>C4 - Compacting of inert construction waste for landfills (including backfilling) (diesel use of 1.6 kWh/tonne) |                         |                           |

### Recovery and Recycling potential (Module D)

Module D accounts for the net environmental benefits or burdens - beyond the system boundary - resulting from the recycling of scrap. It only applies to the net flow of recyclable materials, meaning that any potential benefits are calculated after deducting post-consumer scrap used as input in the product's life cycle from the amount of scrap made available for recycling at the end-of-life.

Module D impacts are modelled using industry average inventories (worldsteel value of scrap dataset (Sphera, 2024)). The steel value of scrap dataset represents the difference between impact when manufacturing 100% primary and 100% secondary steel, and is used to represent the credit/burden at module D.

Module D for this EPD results in a credit as there is more net scrap available. The net flow is calculated as 2.85 kg of scrap out minus 0 kg of scrap in, resulting in a net flow of 2.85 kg out per m<sup>2</sup> of MAXAM.

### Cut off criteria

The cut-off criteria applied are: 1% of renewable and non-renewable primary energy usage, 1% of the total mass input of a process and 1% of environmental impacts.

Transport and packaging of minor raw materials that are insignificant to the overall impacts have been cut off.

### Key assumptions

Packaging for product is allocated at site level, thus represent average packaging across all products.

Any wastes from the production process (Module A3) are assumed to be transported over a 100 km distance to a treatment or disposal site.

Where specific life cycle inventory data were unavailable, proxy data were used, giving preference to regional data.

### Assessment Indicators

The results tables describe the different environmental indicators for each product per declared unit, for each declared module. The EN 15804 reference package based on EF 3.1, February 2023 is used.

- Table 11 contains the core environmental impact indicators in accordance with EN 15804:2012+A2:2019, describing the potential environmental impacts of the product.
- Table 12 provides additional environmental impact indicators in accordance with EN 15804:2012+A2:2019.
- Table 13 shows the life cycle inventory indicators for resource use.
- Table 14 displays the life cycle inventory indicators for waste and other outputs.
- Table 15 displays biogenic carbon content indicators.
- Table 16 contains results for environmental impact indicators in accordance with EN 15804:2012+A1:2013 to aid backward comparability. The results for EN15804+A1 compliant EPDs are not comparable with EN15804+A2 compliant studies as the methodologies are different. Results that are EN15804+A1 compliant are given in this document to assist comparability across EPDs.

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

# Environmental Product Declaration

## COLORSTEEL MAXAM® 0.4mm

**Table 11: EN15804+A2 Core Environmental Impact Indicators**

| Impact category                                                   | Indicator      | Unit                        |
|-------------------------------------------------------------------|----------------|-----------------------------|
| Climate change – total                                            | GWP-total      | kg CO <sub>2</sub> -eq.     |
| Climate change – fossil                                           | GWP-fossil     | kg CO <sub>2</sub> -eq.     |
| Climate change – biogenic                                         | GWP-biogenic   | kg CO <sub>2</sub> -eq.     |
| Climate change – land use and land use change                     | GWP-luluc      | kg CO <sub>2</sub> -eq.     |
| Ozone depletion                                                   | ODP            | kg CFC11-eq.                |
| Acidification                                                     | AP             | Mole of H <sup>+</sup> eq.  |
| Eutrophication aquatic freshwater                                 | EP-freshwater  | kg P eq.                    |
| Eutrophication aquatic marine                                     | EP-marine      | kg N eq.                    |
| Eutrophication terrestrial                                        | EP-terrestrial | Mole of N eq.               |
| Photochemical ozone formation                                     | POCP           | kg NMVOC eq.                |
| Depletion of abiotic resources – minerals and metals <sup>1</sup> | ADP-m&m        | kg Sb-eq.                   |
| Depletion of abiotic resources – fossil fuels <sup>1</sup>        | ADP-fossil     | MJ                          |
| Water use <sup>1</sup>                                            | WDP            | m <sup>3</sup> world equiv. |

**Table 12: EN15804+A2 Additional Environmental Impact Indicators**

| Impact category                                      | Indicator          | Unit                    |
|------------------------------------------------------|--------------------|-------------------------|
| Climate Change <sup>2</sup>                          | GWP-GHG            | kg CO <sub>2</sub> -eq. |
| Climate Change <sup>3</sup>                          | GWP-GHG (IPCC AR5) | kg CO <sub>2</sub> -eq. |
| Particulate Matter emissions                         | PM                 | Disease incidences      |
| Ionising Radiation – human health <sup>4</sup>       | IRP                | kBq U235 eq.            |
| Eco-toxicity (freshwater) <sup>1</sup>               | ETP-fw             | CTUe                    |
| Human Toxicity, cancer <sup>1</sup>                  | HTP-c              | CTUh                    |
| Human Toxicity, non-cancer <sup>1</sup>              | HTP-nc             | CTUh                    |
| Land use related impacts / soil quality <sup>1</sup> | SQP                | Dimensionless (Pt)      |

**Table 13: Life cycle inventory indicators on use of resources**

| Impact category                                                                                            | Indicator | Unit           |
|------------------------------------------------------------------------------------------------------------|-----------|----------------|
| Use of renewable primary energy excluding renewable primary energy resources used as raw materials         | PERE      | MJ             |
| Use of renewable primary energy resources used as raw materials                                            | PERM      | MJ             |
| Total use of renewable primary energy resources                                                            | PERT      | MJ             |
| Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials | PENRE     | MJ             |
| Use of non-renewable primary energy resources used as raw materials                                        | PENRM     | MJ             |
| Total use of non-renewable primary energy resources                                                        | PENRT     | MJ             |
| Use of secondary material                                                                                  | SM        | kg             |
| Use of renewable secondary fuels                                                                           | RSF       | MJ             |
| Use of non-renewable secondary fuels                                                                       | NRSF      | MJ             |
| Net use of fresh water                                                                                     | FW        | m <sup>3</sup> |

# Environmental Product Declaration

## COLORSTEEL MAXAM® 0.4mm

**Table 14: Life cycle inventory indicators on waste categories and output flows**

| Impact category               | Indicator | Unit |
|-------------------------------|-----------|------|
| Hazardous waste disposed      | HWD       | kg   |
| Non-hazardous waste disposed  | NHWD      | kg   |
| Radioactive waste disposed    | RWD       | kg   |
| Components for reuse          | CRU       | kg   |
| Materials for energy recovery | MER       | kg   |
| Materials for recycling       | MFR       | kg   |
| Exported electrical energy    | EEE       | MJ   |
| Exported thermal energy       | EET       | MJ   |

**Table 15: Biogenic carbon content indicators**

| Impact category                     | Indicator | Unit |
|-------------------------------------|-----------|------|
| Biogenic carbon content - product   | BCC-prod  | kg C |
| Biogenic carbon content - packaging | BCC-pack  | kg C |

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

**Table 16: EN15804+A1 Environmental Impact Indicators**

| Impact category                                      | Indicator         | Unit                                   |
|------------------------------------------------------|-------------------|----------------------------------------|
| Global warming potential                             | GWP (EN15804+A1)  | kg CO <sub>2</sub> -eq.                |
| Ozone depletion potential                            | ODP (EN15804+A1)  | kg CFC11-eq.                           |
| Acidification potential                              | AP (EN15804+A1)   | kg SO <sub>2</sub> -eq.                |
| Eutrophication potential                             | EP (EN15804+A1)   | kg PO <sub>4</sub> <sup>3--</sup> -eq. |
| Photochemical ozone creation potential               | POCP (EN15804+A1) | kg Ethene-eq.                          |
| Abiotic depletion potential for non-fossil resources | ADPE (EN15804+A1) | kg Sb-eq.                              |
| Abiotic depletion potential for fossil resources     | ADPF (EN15804+A1) | MJ                                     |

Note: the indicators and characterisation methods are from EN 15804:2012+A1:2013, but other LCA rules (system boundaries, allocation, etc.) are according to EN 15804:2012+A2:2019; i.e., the results of the “A1 indicators” shall not be claimed to be compliant with EN 15804:2012+A1:2013.

## Disclaimers

- 1 The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.
- 2 This indicator is identical to GWP-total except that the CF for biogenic CO<sub>2</sub> is set to zero. It has been included in the EPD following the PCR.
- 3 GWP-GHG (IPCC AR5) is an additional GWP100 indicator that is aligned with the Intergovernmental Panel on Climate Change (IPCC) 2013 Fifth Assessment Report (AR5) (IPCC 2013), national greenhouse gas reporting frameworks in Australia and New Zealand and previous versions of the Construction Products PCR (PCR2019:14v1.11). It excludes biogenic carbon and indirect radiative forcing.
- 4 This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

# Environmental Performance

The following tables show the results for one metre square of COLORSTEEL MAXAM®.

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

The results of the end-of-life stage (modules C1-C4) should be considered when using the results of the product stage (modules A1-A3).

Biogenic carbon and/or recovered energy leaving the product system in module A5 has been balanced out already in modules A1-A3. There is no biogenic carbon in the product, but some biogenic carbon is found in packaging.

The use of primary energy is separated into energy used as raw material and energy used as energy carrier as per option C in Annex 3 in the PCR (EPD International, 2025).

Energy indicators (MJ) are always given as net calorific value.

## Results for primary scenario

**Table 17: EN15804+A2 Core environmental impact indicators**

| Indicator               | Unit                        | A1-A3    | C1       | C2       | C3       | C4       | D         |
|-------------------------|-----------------------------|----------|----------|----------|----------|----------|-----------|
| GWP-total               | kg CO <sub>2</sub> -eq.     | 1.39E+01 | 3.74E-03 | 3.93E-02 | 2.77E-02 | 8.16E-04 | -4.02E+00 |
| GWP-fossil              | kg CO <sub>2</sub> -eq.     | 1.38E+01 | 3.74E-03 | 3.93E-02 | 2.77E-02 | 8.15E-04 | -4.04E+00 |
| GWP-biogenic            | kg CO <sub>2</sub> -eq.     | 3.30E-02 | 5.54E-07 | 5.31E-06 | 1.00E-05 | 1.21E-07 | 2.87E-02  |
| GWP-luluc               | kg CO <sub>2</sub> -eq.     | 1.73E-03 | 9.80E-08 | 1.04E-06 | 8.77E-07 | 2.14E-08 | -6.10E-04 |
| ODP                     | kg CFC11-eq.                | 4.98E-12 | 3.74E-16 | 3.97E-15 | 5.06E-15 | 8.16E-17 | 6.53E-12  |
| AP                      | Mole of H+ eq.              | 1.47E-01 | 2.22E-05 | 2.91E-04 | 1.63E-04 | 4.84E-06 | 9.14E-03  |
| EP-freshwater           | kg P eq.                    | 4.38E-06 | 5.74E-10 | 6.09E-09 | 7.91E-09 | 1.25E-10 | -9.39E-07 |
| EP-marine               | kg N eq.                    | 2.00E-02 | 1.09E-05 | 1.47E-04 | 7.88E-05 | 2.38E-06 | 3.03E-03  |
| EP-terrestrial          | Mole of N eq.               | 2.22E-01 | 1.19E-04 | 1.61E-03 | 8.68E-04 | 2.61E-05 | 3.70E-02  |
| POCP                    | kg NMVOC eq.                | 6.53E-02 | 2.94E-05 | 2.96E-04 | 2.12E-04 | 6.42E-06 | 6.40E-03  |
| ADP-m&m <sup>1</sup>    | kg Sb-eq.                   | 5.40E-05 | 4.92E-11 | 5.22E-10 | 4.79E-10 | 1.07E-11 | -1.58E-05 |
| ADP-fossil <sup>1</sup> | MJ                          | 1.74E+02 | 4.93E-02 | 5.23E-01 | 3.63E-01 | 1.08E-02 | -4.21E+01 |
| WDP <sup>1</sup>        | m <sup>3</sup> world equiv. | 1.61E+00 | 1.41E-05 | 1.49E-04 | 1.57E-03 | 3.07E-06 | -3.13E-01 |

**Table 18: EN15804+A2 Additional Environmental Impact Indicators**

| Indicator                       | Unit                    | A1-A3    | C1       | C2       | C3       | C4       | D         |
|---------------------------------|-------------------------|----------|----------|----------|----------|----------|-----------|
| GWP-GHG <sup>2</sup>            | kg CO <sub>2</sub> -eq. | 1.39E+01 | 3.74E-03 | 3.93E-02 | 2.77E-02 | 8.16E-04 | -4.04E+00 |
| GWP-GHG (IPCC AR5) <sup>3</sup> | kg CO <sub>2</sub> -eq. | 1.39E+01 | 3.74E-03 | 3.93E-02 | 2.78E-02 | 8.16E-04 | -4.04E+00 |
| PM                              | Disease incidences      | 1.00E-06 | 4.44E-10 | 1.50E-09 | 3.19E-09 | 9.69E-11 | 2.54E-07  |
| IRP <sup>4</sup>                | kBq U235 eq.            | 9.95E-02 | 1.03E-06 | 1.10E-05 | 8.15E-06 | 2.25E-07 | 1.09E-01  |
| ETP-fw <sup>1</sup>             | CTUe                    | 8.74E+01 | 2.20E-02 | 2.34E-01 | 2.46E-01 | 4.80E-03 | 3.02E+00  |
| HTP-c <sup>1</sup>              | CTUh                    | 1.52E-07 | 3.62E-13 | 3.85E-12 | 3.09E-12 | 7.90E-14 | 2.06E-09  |
| HTP-nc <sup>1</sup>             | CTUh                    | 9.22E-08 | 7.94E-12 | 8.43E-11 | 5.70E-11 | 1.73E-12 | 1.26E-08  |
| SQP <sup>1</sup>                | Pt                      | 3.03E+01 | 1.00E-04 | 1.07E-03 | 7.82E-03 | 2.19E-05 | -5.75E-01 |

# Environmental Product Declaration

## COLORSTEEL MAXAM® 0.4mm

Table 19: Use of resources

| Indicator | Unit | A1-A3    | C1       | C2       | C3        | C4       | D         |
|-----------|------|----------|----------|----------|-----------|----------|-----------|
| PERE      | MJ   | 4.58E+01 | 2.13E-04 | 2.26E-03 | 5.39E-02  | 4.66E-05 | 1.94E+00  |
| PERM      | MJ   | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00  |
| PERT      | MJ   | 4.58E+01 | 2.13E-04 | 2.26E-03 | 5.39E-02  | 4.66E-05 | 1.94E+00  |
| PENRE     | MJ   | 1.74E+02 | 4.93E-02 | 5.23E-01 | 8.13E-01  | 1.08E-02 | -4.21E+01 |
| PENRM     | MJ   | 5.29E-01 | 0.00E+00 | 0.00E+00 | -4.50E-01 | 0.00E+00 | 0.00E+00  |
| PENRT     | MJ   | 1.74E+02 | 4.93E-02 | 5.23E-01 | 3.63E-01  | 1.08E-02 | -4.21E+01 |
| SM        | kg   | 1.57E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00  |
| RSF       | MJ   | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00  |
| NRSF      | MJ   | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00  |
| FW        | m³   | 9.47E-02 | 2.86E-07 | 3.03E-06 | 1.09E-04  | 6.23E-08 | -4.85E-01 |

Table 20: Waste production and output flows

| Indicator | Unit | A1-A3    | C1       | C2       | C3       | C4       | D         |
|-----------|------|----------|----------|----------|----------|----------|-----------|
| HWD       | kg   | 1.32E-07 | 7.94E-13 | 8.43E-12 | 1.81E-11 | 1.73E-13 | -3.57E-07 |
| NHWD      | kg   | 1.11E+00 | 1.21E-06 | 1.28E-05 | 1.71E-05 | 5.18E-01 | 7.16E-01  |
| RWD       | kg   | 6.19E-04 | 9.63E-09 | 1.02E-07 | 7.42E-08 | 2.10E-09 | 1.54E-05  |
| CRU       | kg   | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| MFR       | kg   | 0.00E+00 | 0.00E+00 | 0.00E+00 | 2.93E+00 | 0.00E+00 | 0.00E+00  |
| MER       | kg   | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| EEE       | MJ   | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| EET       | MJ   | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |

Table 21: Biogenic Carbon Content

| Indicator                           | Unit | A1-A3    |
|-------------------------------------|------|----------|
| Biogenic carbon content - product   | kg   | 0.00E+00 |
| Biogenic carbon content - packaging | kg   | 9.21E-04 |

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

Table 22: EN15804+A1 Environmental Impact Indicators

| Indicator         | Unit                                  | A1-A3    | C1       | C2        | C3       | C4       | D         |
|-------------------|---------------------------------------|----------|----------|-----------|----------|----------|-----------|
| GWP (EN15804+A1)  | kg CO <sub>2</sub> -eq.               | 1.38E+01 | 3.70E-03 | 3.89E-02  | 2.75E-02 | 8.07E-04 | -3.97E+00 |
| ODP (EN15804+A1)  | kg CFC11-eq.                          | 5.91E-12 | 4.40E-16 | 4.67E-15  | 5.95E-15 | 9.61E-17 | 7.69E-12  |
| AP (EN15804+A1)   | kg SO <sub>2</sub> -eq.               | 1.25E-01 | 1.53E-05 | 1.98E-04  | 1.12E-04 | 3.35E-06 | 6.83E-03  |
| EP (EN15804+A1)   | kg PO <sub>4</sub> <sup>3-</sup> -eq. | 6.89E-03 | 3.65E-06 | 4.95E-05  | 2.66E-05 | 7.97E-07 | 1.01E-03  |
| POCP (EN15804+A1) | kg Ethene.                            | 7.39E-03 | 1.67E-06 | -6.93E-05 | 1.20E-05 | 3.63E-07 | -1.34E-03 |
| ADPE (EN15804+A1) | kg Sb-eq.                             | 5.40E-05 | 4.92E-11 | 5.22E-10  | 4.79E-10 | 1.07E-11 | -1.58E-05 |
| ADPF (EN15804+A1) | MJ                                    | 1.71E+02 | 4.90E-02 | 5.20E-01  | 3.61E-01 | 1.07E-02 | -4.24E+01 |

## Results for additional scenarios

This section provides results for alternate end-of-life scenarios.

**Table 23: EN15804+A2 Core environmental impact indicators**

| Indicator               | Unit                        | 100% Recycling |          |           | 100% Landfilling |          |          |
|-------------------------|-----------------------------|----------------|----------|-----------|------------------|----------|----------|
|                         |                             | C3             | C4       | D         | C3               | C4       | D        |
| GWP-total               | kg CO <sub>2</sub> -eq.     | 3.26E-02       | 0.00E+00 | -4.72E+00 | 0.00E+00         | 5.44E-03 | 0.00E+00 |
| GWP-fossil              | kg CO <sub>2</sub> -eq.     | 3.26E-02       | 0.00E+00 | -4.76E+00 | 0.00E+00         | 5.44E-03 | 0.00E+00 |
| GWP-biogenic            | kg CO <sub>2</sub> -eq.     | 1.18E-05       | 0.00E+00 | 3.38E-02  | 0.00E+00         | 8.05E-07 | 0.00E+00 |
| GWP-luluc               | kg CO <sub>2</sub> -eq.     | 1.03E-06       | 0.00E+00 | -7.18E-04 | 0.00E+00         | 1.43E-07 | 0.00E+00 |
| ODP                     | kg CFC11-eq.                | 5.95E-15       | 0.00E+00 | 7.68E-12  | 0.00E+00         | 5.44E-16 | 0.00E+00 |
| AP                      | Mole of H+ eq.              | 1.91E-04       | 0.00E+00 | 1.08E-02  | 0.00E+00         | 3.23E-05 | 0.00E+00 |
| EP-freshwater           | kg P eq.                    | 9.30E-09       | 0.00E+00 | -1.10E-06 | 0.00E+00         | 8.35E-10 | 0.00E+00 |
| EP-marine               | kg N eq.                    | 9.26E-05       | 0.00E+00 | 3.56E-03  | 0.00E+00         | 1.59E-05 | 0.00E+00 |
| EP-terrestrial          | Mole of N eq.               | 1.02E-03       | 0.00E+00 | 4.35E-02  | 0.00E+00         | 1.74E-04 | 0.00E+00 |
| POCP                    | kg NMVOC eq.                | 2.50E-04       | 0.00E+00 | 7.53E-03  | 0.00E+00         | 4.28E-05 | 0.00E+00 |
| ADP-m&m <sup>1</sup>    | kg Sb-eq.                   | 5.64E-10       | 0.00E+00 | -1.85E-05 | 0.00E+00         | 7.15E-11 | 0.00E+00 |
| ADP-fossil <sup>1</sup> | MJ                          | 4.28E-01       | 0.00E+00 | -4.95E+01 | 0.00E+00         | 7.18E-02 | 0.00E+00 |
| WDP <sup>1</sup>        | m <sup>3</sup> world equiv. | 1.85E-03       | 0.00E+00 | -3.68E-01 | 0.00E+00         | 2.04E-05 | 0.00E+00 |

**Table 24: EN15804+A2 Additional Environmental Impact Indicators**

| Indicator                       | Unit                    | 100% Recycling |          |           | 100% Landfilling |          |          |
|---------------------------------|-------------------------|----------------|----------|-----------|------------------|----------|----------|
|                                 |                         | C3             | C4       | D         | C3               | C4       | D        |
| GWP-GHG <sup>2</sup>            | kg CO <sub>2</sub> -eq. | 3.26E-02       | 0.00E+00 | -4.76E+00 | 0.00E+00         | 5.44E-03 | 0.00E+00 |
| GWP-GHG (IPCC AR5) <sup>3</sup> | kg CO <sub>2</sub> -eq. | 3.26E-02       | 0.00E+00 | -4.76E+00 | 0.00E+00         | 5.44E-03 | 0.00E+00 |
| PM                              | Disease incidences      | 3.76E-09       | 0.00E+00 | 2.99E-07  | 0.00E+00         | 6.46E-10 | 0.00E+00 |
| IRP <sup>4</sup>                | kBq U235 eq.            | 9.59E-06       | 0.00E+00 | 1.28E-01  | 0.00E+00         | 1.50E-06 | 0.00E+00 |
| ETP-fw <sup>1</sup>             | CTUe                    | 2.89E-01       | 0.00E+00 | 3.55E+00  | 0.00E+00         | 3.20E-02 | 0.00E+00 |
| HTP-c <sup>1</sup>              | CTUh                    | 3.63E-12       | 0.00E+00 | 2.43E-09  | 0.00E+00         | 5.26E-13 | 0.00E+00 |
| HTP-nc <sup>1</sup>             | CTUh                    | 6.71E-11       | 0.00E+00 | 1.49E-08  | 0.00E+00         | 1.15E-11 | 0.00E+00 |
| SQP                             | Pt                      | 9.20E-03       | 0.00E+00 | -6.76E-01 | 0.00E+00         | 1.46E-04 | 0.00E+00 |

**Table 25: Use of resources**

| Indicator | Unit           | 100% Recycling |          |           | 100% Landfilling |          |          |
|-----------|----------------|----------------|----------|-----------|------------------|----------|----------|
|           |                | C3             | C4       | D         | C3               | C4       | D        |
| PERE      | MJ             | 6.34E-02       | 0.00E+00 | 2.28E+00  | 0.00E+00         | 3.10E-04 | 0.00E+00 |
| PERM      | MJ             | 0.00E+00       | 0.00E+00 | 0.00E+00  | 0.00E+00         | 0.00E+00 | 0.00E+00 |
| PERT      | MJ             | 6.34E-02       | 0.00E+00 | 2.28E+00  | 0.00E+00         | 3.10E-04 | 0.00E+00 |
| PENRE     | MJ             | 9.57E-01       | 0.00E+00 | -4.95E+01 | 0.00E+00         | 7.18E-02 | 0.00E+00 |
| PENRM     | MJ             | -5.29E-01      | 0.00E+00 | 0.00E+00  | 0.00E+00         | 0.00E+00 | 0.00E+00 |
| PENRT     | MJ             | 4.28E-01       | 0.00E+00 | -4.95E+01 | 0.00E+00         | 7.18E-02 | 0.00E+00 |
| SM        | kg             | 0.00E+00       | 0.00E+00 | 0.00E+00  | 0.00E+00         | 0.00E+00 | 0.00E+00 |
| RSF       | MJ             | 0.00E+00       | 0.00E+00 | 0.00E+00  | 0.00E+00         | 0.00E+00 | 0.00E+00 |
| NRSF      | MJ             | 0.00E+00       | 0.00E+00 | 0.00E+00  | 0.00E+00         | 0.00E+00 | 0.00E+00 |
| FW        | m <sup>3</sup> | 1.28E-04       | 0.00E+00 | -5.70E-01 | 0.00E+00         | 4.16E-07 | 0.00E+00 |

# Environmental Product Declaration

## COLORSTEEL MAXAM® 0.4mm

Table 26: Waste production and output flows

| Indicator | Unit | 100% Recycling |          |           | 100% Landfilling |          |          |
|-----------|------|----------------|----------|-----------|------------------|----------|----------|
|           |      | C3             | C4       | D         | C3               | C4       | D        |
| HWD       | kg   | 2.13E-11       | 0.00E+00 | -4.20E-07 | 0.00E+00         | 1.16E-12 | 0.00E+00 |
| NHWD      | kg   | 2.01E-05       | 0.00E+00 | 8.43E-01  | 0.00E+00         | 3.45E+00 | 0.00E+00 |
| RWD       | kg   | 8.73E-08       | 0.00E+00 | 1.81E-05  | 0.00E+00         | 1.40E-08 | 0.00E+00 |
| CRU       | kg   | 0.00E+00       | 0.00E+00 | 0.00E+00  | 0.00E+00         | 0.00E+00 | 0.00E+00 |
| MFR       | kg   | 3.45E+00       | 0.00E+00 | 0.00E+00  | 0.00E+00         | 0.00E+00 | 0.00E+00 |
| MER       | kg   | 0.00E+00       | 0.00E+00 | 0.00E+00  | 0.00E+00         | 0.00E+00 | 0.00E+00 |
| EEE       | MJ   | 0.00E+00       | 0.00E+00 | 0.00E+00  | 0.00E+00         | 0.00E+00 | 0.00E+00 |
| EET       | MJ   | 0.00E+00       | 0.00E+00 | 0.00E+00  | 0.00E+00         | 0.00E+00 | 0.00E+00 |

Table 27: EN15804+A1 Environmental Impact Indicators

| Indicator         | Unit                                   | 100% Recycling |          |           | 100% Landfilling |          |          |
|-------------------|----------------------------------------|----------------|----------|-----------|------------------|----------|----------|
|                   |                                        | C3             | C4       | D         | C3               | C4       | D        |
| GWP (EN15804+A1)  | kg CO <sub>2</sub> -eq.                | 3.23E-02       | 0.00E+00 | -4.67E+00 | 0.00E+00         | 5.38E-03 | 0.00E+00 |
| ODP (EN15804+A1)  | kg CFC11-eq.                           | 7.00E-15       | 0.00E+00 | 9.04E-12  | 0.00E+00         | 6.40E-16 | 0.00E+00 |
| AP (EN15804+A1)   | kg SO <sub>2</sub> -eq.                | 1.32E-04       | 0.00E+00 | 8.04E-03  | 0.00E+00         | 2.23E-05 | 0.00E+00 |
| EP (EN15804+A1)   | kg PO <sub>4</sub> <sup>3--</sup> -eq. | 3.13E-05       | 0.00E+00 | 1.18E-03  | 0.00E+00         | 5.32E-06 | 0.00E+00 |
| POCP (EN15804+A1) | kg Ethene.                             | 1.42E-05       | 0.00E+00 | -1.58E-03 | 0.00E+00         | 2.42E-06 | 0.00E+00 |
| ADPE (EN15804+A1) | kg Sb-eq.                              | 5.64E-10       | 0.00E+00 | -1.85E-05 | 0.00E+00         | 7.16E-11 | 0.00E+00 |
| ADPF (EN15804+A1) | MJ                                     | 4.25E-01       | 0.00E+00 | -4.99E+01 | 0.00E+00         | 7.13E-02 | 0.00E+00 |

## Additional environmental information

This section provides conversion factors for additional processing for COLORSTEEL MAXAM® 0.4mm.

This includes:

- Addition of a PET fleece layer to the product - DRIDEX
- Rollforming the product

The conversion factors are to be multiplied with the main set of results.

### COLORSTEEL DRIDEX®

#### Description

COLORSTEEL DRIDEX® is metallic coated steel with an organic coating applied to both surfaces. The under-surface has an absorbent layer of fleece to manage condensation. Suitable for roofing and canopies of all building types, and wall cladding of lined and unlined enclosed buildings.

#### Key performance characteristics

- Colour retention is 8 units maximum after 10 years exposure
- Chalk rating is no more than 4 after 10 years exposure
- Metal coating is AM150 consistent with AS 1397:2021
- Product Type 6 consistent with AS/NZS 2728:2013
- Absorbency of fleece meets the requirements for a roofing underlay as described in NZS 2295



Table 28: Variation in mass – 1m² COLORSTEEL DRIDEX®

| Product           | Maxam input (kg/m²) | PET fleece (kg/m²) | Product with PET fleece (kg/m²) |
|-------------------|---------------------|--------------------|---------------------------------|
| COLORSTEEL MAXAM® | 3.35                | 0.114              | 3.46                            |

Table 29: Variation for EN15804+A2 GWP-total impact indicator – 1m² COLORSTEEL DRIDEX®

| Product                             | MAXAM (A1-A3) | PET fleece | DRIDEX (A1-A3) |
|-------------------------------------|---------------|------------|----------------|
| GWP-total (kg CO <sub>2</sub> e/m²) | 13.9          | 0.785      | 14.7           |

### Rollforming

COLORSTEEL MAXAM® is supplied by New Zealand Steel to downstream processors in coils. These coils are uncoiled and formed into roofing and cladding profiles, as well as gutter, fascia, downpipes and accessory products. The finished products are delivered to construction sites for installation. A wide variety of attractive profiles with different spanning strengths, fixing methods and visual aesthetics are produced.

To provide indicative results for the final formed product up to the rollforming gate, data has been obtained from selected sites of several rollformers based in New Zealand. We indicatively estimate that rollforming would add 0.569 kg CO<sub>2</sub>e/m² to the results in table 17.

The indicative conversion factors represent an average of the data collected from the surveyed sites only. These results may not be representative of the final formed product from any particular rollforming operation, company or site. Actual results will vary depending on a range of factors specific to the particular operation of the downstream processors.

## Abbreviations

|               |                                                               |
|---------------|---------------------------------------------------------------|
| <b>ACRS</b>   | Australasian Certification for Reinforcing Steel              |
| <b>AS/NZS</b> | Australian/New Zealand Standard                               |
| <b>ANZSIC</b> | Australian and New Zealand Standard Industrial Classification |
| <b>CEN</b>    | European Committee for Standardization                        |
| <b>CPC</b>    | Central product classification                                |
| <b>EAFF</b>   | Electric Arc Furnace                                          |
| <b>EF</b>     | Environmental Footprint                                       |
| <b>EN</b>     | European Norm (Standard)                                      |
| <b>GPI</b>    | General Programme Instructions                                |
| <b>HERA</b>   | Heavy Engineering Research Association                        |
| <b>ISO</b>    | International Organization for Standardization                |
| <b>KOBM</b>   | Klockner Oxygen Blown Maxhutte.                               |
| <b>LCA FE</b> | Life Cycle for Experts                                        |
| <b>LCI</b>    | Life Cycle Inventory                                          |
| <b>MBIE</b>   | Ministry of Business, Innovation, and Employment              |
| <b>MHF</b>    | Multi Hearth Furnace                                          |
| <b>MLC</b>    | Managed LCA Content                                           |
| <b>ND</b>     | Not Declared                                                  |
| <b>NZ</b>     | New Zealand                                                   |
| <b>NZS</b>    | New Zealand Steel                                             |
| <b>SVHC</b>   | Substance of Very High Concern                                |
| <b>VRU</b>    | Vanadium Recovery Unit                                        |

## References

---

**AS/NZS. (2013).** 2728:2013 Prefinished/prepainted sheet metal products for interior/exterior building applications - Performance requirements. Standards Australia/Standards New Zealand.

---

**AS/NZS. (2016).** ISO 14001 Environmental Management System. Standards Australia/Standards New Zealand.

---

**BraveTrace. (2023).** NZECS Residual Supply Mix for electricity certification. New Zealand.

---

**CEN. (2013).** EN 15804:2012+A1:2013, Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products. European Committee for Standardization.

---

**CEN. (2021).** EN 15804:2012+A2:2019/AC:2021 Sustainability of construction works. Environmental product declarations. Core rules for the product category of construction products. Brussels: European Committee for Standardization.

---

**CEN. (2024).** EN 15941:2024, Sustainability of construction works – Data quality for environmental assessment of products and construction work – Selection and use of data. Brussels: European Committee for Standardization.

---

**ECHA. (2025).** Candidate List of substances of very high concern for Authorisation. Retrieved from European Chemical Agency: <https://echa.europa.eu/candidate-list-table>

---

**ECO Platform. (2024).** ECO Platform standards, versions published 2024-12-20. Retrieved from <https://www.eco-platform.org/our-documents.html>.

---

**EPD International. (2025a).** General Programme Instructions for the International EPD System. Version 5.0.1, dated 2025-02-27. Stockholm: EPD International AB.

---

**EPD International. (2025b).** PCR 2019:14 Construction Products version 2.0.1 of 2025-06-05 (valid until 2030-04-07). Stockholm: EPD International AB.

---

**IPCC. (2013).** Climate Change 2013: The Physical Science Basis. Geneva, Switzerland: IPCC.

---

**ISO. (2006a).** ISO 14040: Environmental management – Life cycle assessment – Principles and framework. Geneva: International Organization for Standardization.

---

**ISO. (2006b).** ISO 14044: Environmental management – Life cycle assessment – Requirements and guidelines. Geneva: International Organization for Standardization.

---

**ISO. (2006c).** ISO 14025: Environmental labels and declarations - Type III environmental declarations - Principles and procedures. Geneva: International Organization for Standardization.

---

**MBIE. (2023).** Annual Electricity Data Updates. New Zealand: Ministry of Business, Innovation, and Employment.

---

**RNZ. (2024).** Carbon saved by NZ Steel's new furnace upped to 1 million tonnes a year, brought forward to 2025. Retrieved from <https://www.rnz.co.nz/news/business/526540/carbon-saved-by-nz-steel-s-new-furnace-upped-to-1-million-tonnes-a-year-brought-forward-to-2025>

---

**Sphera. (2024).** Life Cycle Inventory Database 2024 Documentation. Retrieved from Sphera: <https://lcadatabase.sphera.com/>

---

**thinkstep-anz. (2021).** HERA Report R5-89: Steel recycling, v.2. New Zealand: HERA.

---

## General Information

An Environmental Product Declaration, or EPD, is a standardised and verified way of quantifying the environmental impacts of a product based on a consistent set of rules known as a PCR (Product Category Rules). The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but published in different EPD programmes may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison. For further information about comparability, see EN 15804 (CEN, 2021) and ISO 14025 (ISO, 2006c).

The results for EN15804+A1 (CEN, 2013) compliant EPDs are not comparable with EN15804+A2 (CEN, 2021) compliant studies as the methodologies are different. To support backwards comparability and compatibility, environmental performance results have also been provided for the indicators required in EN15804+A1, although the study does not claim compliance with this standard.

| Programme Information                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EPD Programme Operator:                                                                                                                       | <b>EPD International AB</b><br>Web: <a href="http://www.environdec.com">www.environdec.com</a><br>Email: <a href="mailto:support@environdec.com">support@environdec.com</a><br>Post: EPD International AB, Box 210 60, SE-100 31 Stockholm, Sweden <div style="text-align: right;">  </div>                                                         |
| Licensee:                                                                                                                                     | <b>EPD Australasia Limited</b><br>Web: <a href="http://www.epd-australasia.com">www.epd-australasia.com</a><br>Email: <a href="mailto:info@epd-australasia.com">info@epd-australasia.com</a><br>Post: EPD Australasia Limited, 6 Cube Court, Richmond 7020, New Zealand <div style="text-align: right;">  </div>                                   |
| Product Category Rules (PCR) CEN standard EN 15804 serve as the core Product Category Rules (PCR)                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| PCR:                                                                                                                                          | PCR 2019.14 Construction Products, version 2.0.1<br>(published on 2025-06-05, valid until 2030-04-07)                                                                                                                                                                                                                                                                                                                                   |
| PCR review conducted by:                                                                                                                      | The Technical Committee of the International EPD® System.<br>See <a href="http://www.environdec.com">www.environdec.com</a> for a list of members.                                                                                                                                                                                                                                                                                      |
| Review Chairs:                                                                                                                                | Rob Rouwette, start2see (chair), Noa Meron, thinkstep-anz (co-chair).<br>The review panel may be contacted via the Secretariat:<br><a href="http://www.environdec.com/contact">www.environdec.com/contact</a>                                                                                                                                                                                                                           |
| Verification                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| External and independent ('third-party') verification of the declaration and data, according to ISO 14025:2006, via EPD verification through: | <input checked="" type="checkbox"/> Individual EPD verification without a pre-verified LCA/EPD tool<br><input type="checkbox"/> Individual EPD verification with a pre-verified LCA/EPD tool<br><input type="checkbox"/> EPD Process Certification* without a pre-verified LCA/EPD tool<br><input type="checkbox"/> EPD Process Certification* with a pre-verified LCA/EPD tool<br><input type="checkbox"/> Fully pre-verified EPD tool |
| Third-party verifier:                                                                                                                         | <br><b>Rob Rouwette, start2see Pty Ltd</b><br>Web: <a href="http://www.start2see.com.au">www.start2see.com.au</a><br>Email: <a href="mailto:Rob.Rouwette@start2see.com.au">Rob.Rouwette@start2see.com.au</a>                                                                                                                                         |
| Verifier approved by:                                                                                                                         | <b>EPD Australasia Ltd and The International EPD System</b>                                                                                                                                                                                                                                                                                                                                                                             |
| Procedure for follow-up during EPD validity involves third party verifier:                                                                    | <input checked="" type="checkbox"/> Yes<br><input type="checkbox"/> No                                                                                                                                                                                                                                                                                                                                                                  |



NOTE: Buyers and users of New Zealand Steel Limited products and services must make their own assessment of the products for their own conditions. All queries regarding product specification, purpose or application should be directed to New Zealand Steel Limited, phone 0800 697 833. New Zealand Steel Limited reserves the right to modify products, techniques, equipment and statements to reflect improvements in the manufacture and application of its products. The information contained in this brochure is accurate as at October 2025 and supplied without prejudice to New Zealand Steel Limited's standard terms and conditions of sale. In the event of conflict between this information and the standard terms and conditions, the standard terms and conditions prevail. COLORSTEEL®, MAXAM®, and Dridex®, are registered trademarks of New Zealand Steel Limited. Copyright© New Zealand Steel Limited, October 2025.

[COLORSTEEL.CO.NZ](https://colorsteel.co.nz)

