


CLEO ON 2700K

SPECIFICATIONS

MOUNTING		CEILING
POWER	[W]	7
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	660
COLOUR TEMPERATURE	[K]	2700
CRI		>90
BEAM ANGLE		73°
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	94
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		YES
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0.9
GROSS WEIGHT	[kg]	0.95
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
COLOUR (HOUSING)		BRASS



LIGHT DISTRIBUTION

73°

*Luminous flux values are nominal LED data at a operating temperature of 25° C


Colours:



black



brass



white




black/brass




white/brass

CUT OUT DIMENSIONS mm



FIXTURE DIMENSIONS mm



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING


CLEO ON 3000K

SPECIFICATIONS

MOUNTING		CEILING
POWER	[W]	7
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	700
COLOUR TEMPERATURE	[K]	3000
CRI		>90
BEAM ANGLE		73°
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	100
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		YES
THROUGH-WIRING		NO


MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0.9
GROSS WEIGHT	[kg]	0.95
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
COLOUR (HOUSING)		BRASS

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

73°

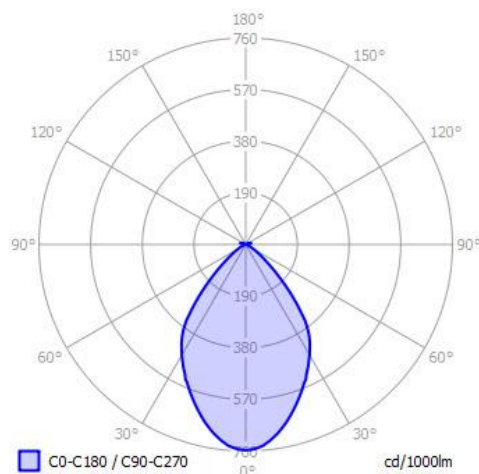


Colours:



black



brass



white




black/brass




white/brass

CUT OUT DIMENSIONS mm



FIXTURE DIMENSIONS mm



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING