

CLIPPO OPTIC WALL 2700K

SPECIFICATIONS

MOUNTING		LED-WALL LUMINAIRE
POWER	[W]	2 x 7
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	2 x 740
COLOUR TEMPERATURE	[K]	2700
CRI		>90
BEAM ANGLE		75° / 75°
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	106

POWER SUPPLY	[V] [A]	220-240V AC 50/60Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES

MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1.15
GROSS WEIGHT	[kg]	1.20
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005

*Luminous flux values are nominal LED data at a operating temperature of 25° C




Colours:

white/white	white/white	black/black	black/gold


LIGHT DISTRIBUTION

75°/75°

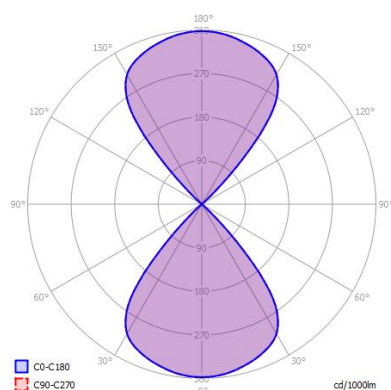


OPTIONS / OPTIONAL ACCESSORIES

CUT OUT DIMENSIONS mm

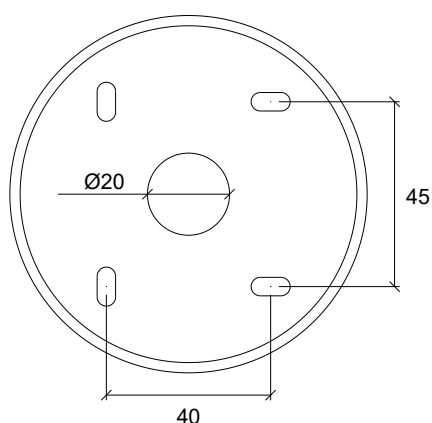

FIXTURE DIMENSIONS mm

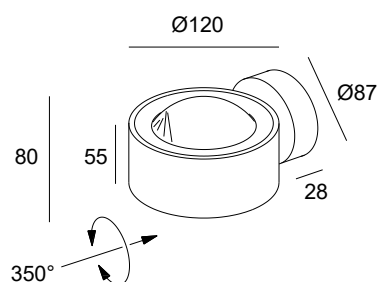

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

CLIPPO OPTIC WALL dim to warm

SPECIFICATIONS

MOUNTING		LED-WALL LUMINAIRE
POWER	[W]	2 x 6
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	2 x 15-635
COLOUR TEMPERATURE	[K]	1800-3000
CRI		>90
BEAM ANGLE		80° / 80°
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	105
POWER SUPPLY	[V] [A]	220-240V AC 50/60Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1.15
GROSS WEIGHT	[kg]	1.20
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



Colours:




LIGHT DISTRIBUTION

80°/80°


*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

CUT OUT DIMENSIONS mm

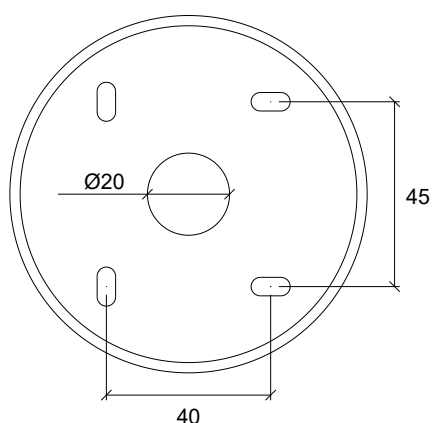

FIXTURE DIMENSIONS mm

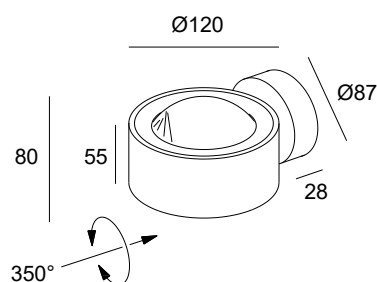

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING