

CLIPPO OPTIC DUO ROYAL

SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	2x13W
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	2x1320
COLOUR TEMPERATURE	[K]	2700
CRI		>90
BEAM ANGLE		36°
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	101
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES

MATERIAL
INGRESS PROTECTION
PROTECTION CLASS
NET WEIGHT
GROSS WEIGHT

ALUMINUM
IP20
I
[kg] 1,70
[kg] 1,74

COLOUR (HOUSING)
COLOUR (HOUSING)
COLOUR (HOUSING)
COLOUR (HOUSING)
COLOUR (HOUSING)

ROYAL BRASS
ROYAL BRONZE
ROYAL GOLD
ROYAL GUN METAL
ROYAL PURPLE

*Luminous flux values are nominal LED data at a operating temperature of 25° C


OPTIONS / OPTIONAL ACCESSORIES

reflector 13W LED 15°/48°
diffuser foil



LIGHT DISTRIBUTION

36°

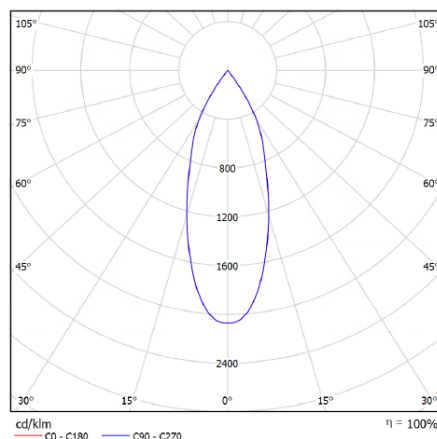

Colours:



royal brass



royal bronze



royal gold




royal gun metal




royal purple

MOUNTING DIMENSIONS mm

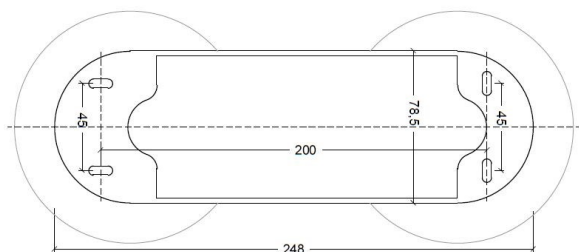

FIXTURE DIMENSIONS mm

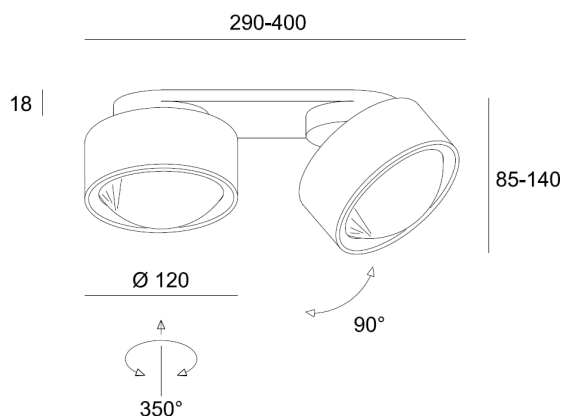

CRI > 90



DIM



IP20

DLS LIGHTING

—

www.dslighting.com

***DLS**
LIGHTING