

SPAGO 60 EP

SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	2
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	230
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	40
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	115

POWER SUPPLY	[V] [A]	700mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER


MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,37
GROSS WEIGHT	[kg]	0,40
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
COLOUR (HOUSING)		GOLD ~RAL8000
CUT-OUT	[mm]	Ø68
RECESSED DEPTH (H)	[mm]	45

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

40°

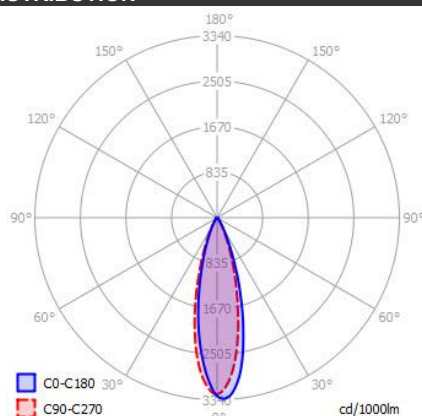

OPTIONS / OPTIONAL ACCESSORIES

DIFFUSER	GLASS HEAD, SAND BLASTED
CABLE KIT 5	5000mm cable


Colours




white




black




gold



CUT OUT DIMENSIONS



FIXTURE DIMENSIONS

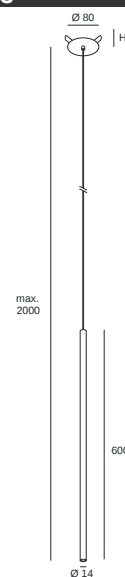

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

SPAGO 90 EP

SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	2
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	230
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	40
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	115

POWER SUPPLY	[V] [A]	700mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER


MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,43
GROSS WEIGHT	[kg]	0,46
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
COLOUR (HOUSING)		GOLD ~RAL8000
CUT-OUT	[mm]	Ø68
RECESSED DEPTH (H)	[mm]	45

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

40°

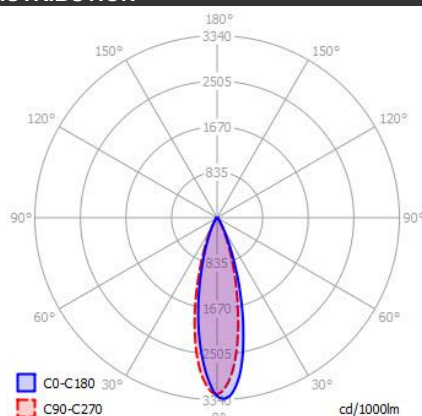

OPTIONS / OPTIONAL ACCESSORIES

DIFFUSER	GLASS HEAD, SAND BLASTED
CABLE KIT 5	5000mm cable


Colours



white




black




gold

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS

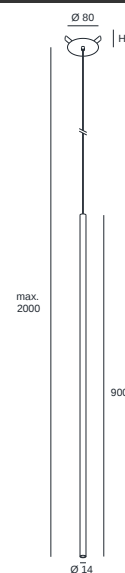

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING