

ORBIT SILENT F280 2700K

SPECIFICATIONS


MOUNTING		ACOUSTIC CEILING/WALL
POWER	[W]	7.5
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	660
COLOUR TEMPERATURE	[K]	2700
CRI		>90
BEAM ANGLE		360
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	88

POWER SUPPLY	[V] [A]	220-240V AC 50/60Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO

MATERIAL		ALUMINUM AND ACOUSTIC MATERIAL
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1.57
GROSS WEIGHT	[kg]	2.21

COLOUR (HOUSING)	BLACK ~RAL9005
COLOUR (HOUSING)	WHITE ~RAL9003
COLOUR (ACOUSTIC MATERIAL)	VINTAGE RED
COLOUR (ACOUSTIC MATERIAL)	CORAL REEF
COLOUR (ACOUSTIC MATERIAL)	BRONZE SHADOW
COLOUR (ACOUSTIC MATERIAL)	SAVANNAH BROWN
COLOUR (ACOUSTIC MATERIAL)	TWILIGHT NAVY
COLOUR (ACOUSTIC MATERIAL)	FOREST CANOPY
COLOUR (ACOUSTIC MATERIAL)	CLOUDY BLUE
COLOUR (ACOUSTIC MATERIAL)	GOLDEN DUSK


*Luminous flux values are nominal LED data at a operating temperature of 25° C



Colours:



LIGHT DISTRIBUTION

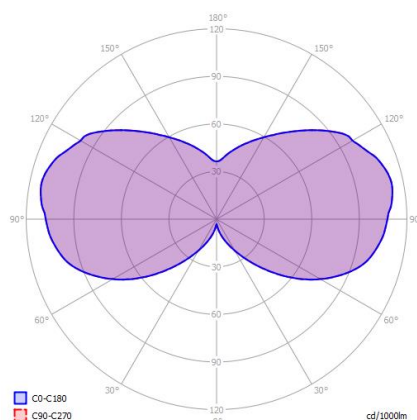


OPTIONS / OPTIONAL ACCESSORIES


ORBIT SPACER RINGS



CUT OUT DIMENSIONS mm



FIXTURE DIMENSIONS mm



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

ORBIT SILENT F380 2700K

SPECIFICATIONS


MOUNTING		ACOUSTIC CEILING/WALL
POWER	[W]	7.5
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	660
COLOUR TEMPERATURE	[K]	2700
CRI		>90
BEAM ANGLE		360
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	88

POWER SUPPLY	[V] [A]	220-240V AC 50/60Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO

MATERIAL		ALUMINUM AND ACOUSTIC MATERIAL
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1.67
GROSS WEIGHT	[kg]	2.56

COLOUR (HOUSING)	BLACK ~RAL9005
COLOUR (HOUSING)	WHITE ~RAL9003
COLOUR (ACOUSTIC MATERIAL)	VINTAGE RED
COLOUR (ACOUSTIC MATERIAL)	CORAL REEF
COLOUR (ACOUSTIC MATERIAL)	BRONZE SHADOW
COLOUR (ACOUSTIC MATERIAL)	SAVANNAH BROWN
COLOUR (ACOUSTIC MATERIAL)	TWILIGHT NAVY
COLOUR (ACOUSTIC MATERIAL)	FOREST CANOPY
COLOUR (ACOUSTIC MATERIAL)	CLOUDY BLUE
COLOUR (ACOUSTIC MATERIAL)	GOLDEN DUSK


*Luminous flux values are nominal LED data at a operating temperature of 25° C



Colours:




black



white

LIGHT DISTRIBUTION

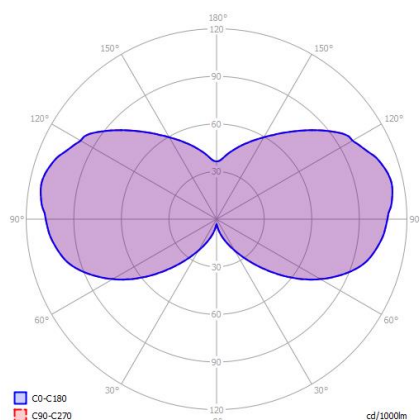


OPTIONS / OPTIONAL ACCESSORIES


ORBIT SPACER RINGS



CUT OUT DIMENSIONS mm



FIXTURE DIMENSIONS mm



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

ORBIT SILENT F450 2700K

SPECIFICATIONS


MOUNTING		ACOUSTIC CEILING/WALL
POWER	[W]	7.5
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	660
COLOUR TEMPERATURE	[K]	2700
CRI		>90
BEAM ANGLE		360
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	88

POWER SUPPLY	[V] [A]	220-240V AC 50/60Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO

MATERIAL		ALUMINUM AND ACOUSTIC MATERIAL
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1.79
GROSS WEIGHT	[kg]	2.93

COLOUR (HOUSING)	BLACK ~RAL9005
COLOUR (HOUSING)	WHITE ~RAL9003
COLOUR (ACOUSTIC MATERIAL)	VINTAGE RED
COLOUR (ACOUSTIC MATERIAL)	CORAL REEF
COLOUR (ACOUSTIC MATERIAL)	BRONZE SHADOW
COLOUR (ACOUSTIC MATERIAL)	SAVANNAH BROWN
COLOUR (ACOUSTIC MATERIAL)	TWILIGHT NAVY
COLOUR (ACOUSTIC MATERIAL)	FOREST CANOPY
COLOUR (ACOUSTIC MATERIAL)	CLOUDY BLUE
COLOUR (ACOUSTIC MATERIAL)	GOLDEN DUSK


*Luminous flux values are nominal LED data at a operating temperature of 25° C



Colours:




black



white

LIGHT DISTRIBUTION

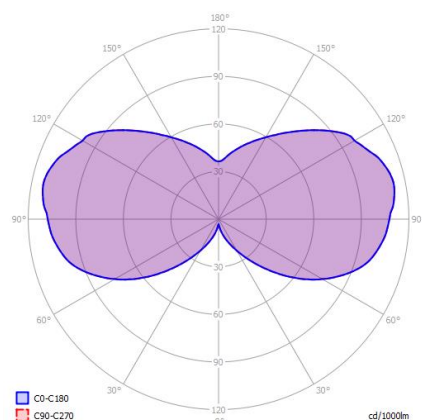


OPTIONS / OPTIONAL ACCESSORIES


ORBIT SPACER RINGS



CUT OUT DIMENSIONS mm



FIXTURE DIMENSIONS mm

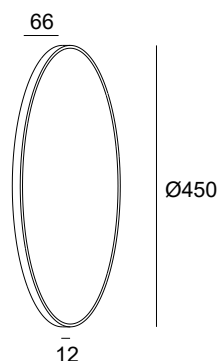

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING