

CLIPPO OUTDOOR

SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	8,8
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	990
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	30 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	112,5
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP65
PROTECTION CLASS		I
IMPACT PROTECTION		IK06
NET WEIGHT	[kg]	0,90
GROSS WEIGHT	[kg]	0,93
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



LIGHT DISTRIBUTION


30°

n/a

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES


Colours




white

black

MOUNTING DIMENSIONS



FIXTURE DIMENSIONS

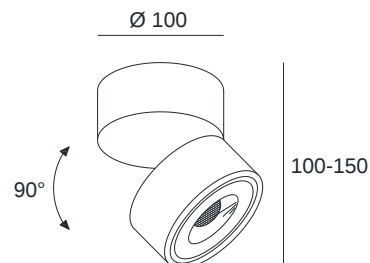

mounting on junction boxes (Ø68mm) possible



CRI > 90

DIM



IK06

IP65

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING