

CLEO SILENT 280 2700K

SPECIFICATIONS

MOUNTING		ACOUSTIC LED PENDANT
POWER	[W]	7
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	660
COLOUR TEMPERATURE	[K]	2700
CRI		>90
BEAM ANGLE		83°
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	94

POWER SUPPLY	[V] [A]	220-240V AC 50/60Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		NO

MATERIAL		ALUMINUM AND ACOUSTIC MATERIAL
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0.94
GROSS WEIGHT	[kg]	1.57

COLOUR (HOUSING)	BLACK ~RAL9005
COLOUR (HOUSING)	WHITE ~RAL9003
COLOUR (HOUSING)	BRASS
COLOUR (ACOUSTIC MATERIAL)	VINTAGE RED
COLOUR (ACOUSTIC MATERIAL)	CORAL REEF
COLOUR (ACOUSTIC MATERIAL)	BRONZE SHADOW
COLOUR (ACOUSTIC MATERIAL)	SAVANNAH BROWN
COLOUR (ACOUSTIC MATERIAL)	TWILIGHT NAVY
COLOUR (ACOUSTIC MATERIAL)	FOREST CANOPY
COLOUR (ACOUSTIC MATERIAL)	CLOUDY BLUE
COLOUR (ACOUSTIC MATERIAL)	GOLDEN DUSK

*Luminous flux values are nominal LED data at a operating temperature of 25° C




Colours:



LIGHT DISTRIBUTION

83°

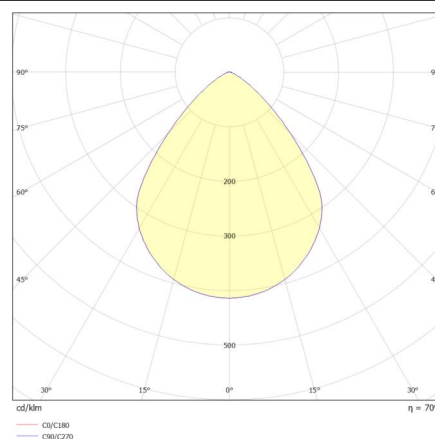


OPTIONS / OPTIONAL ACCESSORIES

CLEO CABLE KIT 5m



CUT OUT DIMENSIONS mm

FIXTURE DIMENSIONS mm

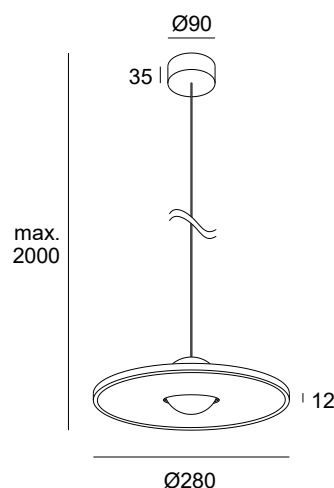

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

CLEO SILENT 280 3000K

SPECIFICATIONS

MOUNTING		ACOUSTIC LED PENDANT
POWER	[W]	7
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	700
COLOUR TEMPERATURE	[K]	3000
CRI		>90
BEAM ANGLE		83°
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	100

POWER SUPPLY	[V] [A]	220-240V AC 50/60Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		NO


MATERIAL		ALUMINUM AND ACOUSTIC MATERIAL
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0.94
GROSS WEIGHT	[kg]	1.57

COLOUR (HOUSING)	BLACK ~RAL9005
COLOUR (HOUSING)	WHITE ~RAL9003
COLOUR (HOUSING)	BRASS
COLOUR (ACOUSTIC MATERIAL)	VINTAGE RED
COLOUR (ACOUSTIC MATERIAL)	CORAL REEF
COLOUR (ACOUSTIC MATERIAL)	BRONZE SHADOW
COLOUR (ACOUSTIC MATERIAL)	SAVANNAH BROWN
COLOUR (ACOUSTIC MATERIAL)	TWILIGHT NAVY
COLOUR (ACOUSTIC MATERIAL)	FOREST CANOPY
COLOUR (ACOUSTIC MATERIAL)	CLOUDY BLUE
COLOUR (ACOUSTIC MATERIAL)	GOLDEN DUSK

*Luminous flux values are nominal LED data at a operating temperature of 25° C




Colours:



LIGHT DISTRIBUTION

83°

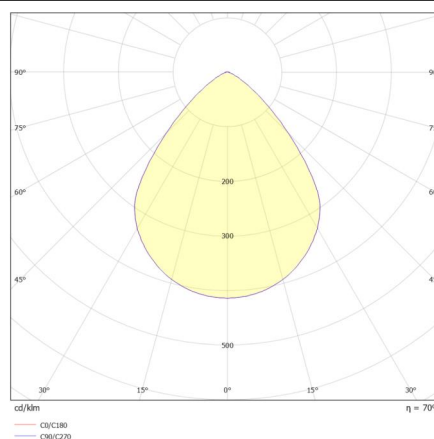


OPTIONS / OPTIONAL ACCESSORIES

CLEO CABLE KIT 5m



CUT OUT DIMENSIONS mm

FIXTURE DIMENSIONS mm

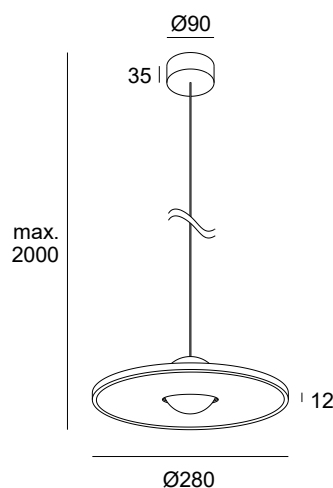

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING