

Baby; Bilia; Circus; Angled sospensione / suspension

A) L'installazione e la manutenzione va eseguita ad apparecchio spento. Tutte le operazioni devono essere effettuate da un tecnico specializzato. Prima di iniziare i lavori di installazione, staccare l'interruttore di alimentazione generale. **B)** Modifiche o manomissioni del prodotto e il non rispetto delle indicazioni di seguito riportate possono rendere l'apparecchio pericoloso. **C)** L'apparecchio può raggiungere temperature elevate durante l'esercizio e pertanto occorre evitare il contatto con persone, animali o cose. **D)** I prodotti con IP40 non sono idonei per uso esterno. **E)** Per la pulizia di tutte le superfici metalliche e plastiche utilizzare un panno morbido asciutto. **F)** La ditta Zafferano declina ogni responsabilità per danni causati da un proprio prodotto montato in modo non conforme alle istruzioni.


A) Installation and maintenance must be done when full power is switched off. All operations should be performed by a specialized technician. Disconnect the general power switch before starting the installation work.

B) Modifications or handling of the product and the non-respect of the information below may be dangerous. **C)** The unit can reach high temperatures during operation and therefore any kind of physical contact must be avoided. **D)** Product with IP40 rating are not suitable for outdoor areas.


E) Cleaning of all metal and plastic surfaces using a soft dry cloth.

F) The company Zafferano assumes no responsibility for damages caused by a product installed not in accordance with instructions.

Distanza fori per fissaggio a muro
Distance holes for wall fixing

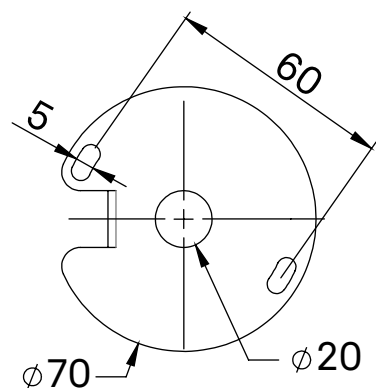


1

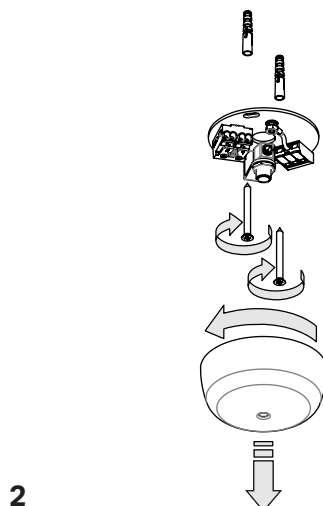


2


Solo per versione con paralume
Only for lampshade version

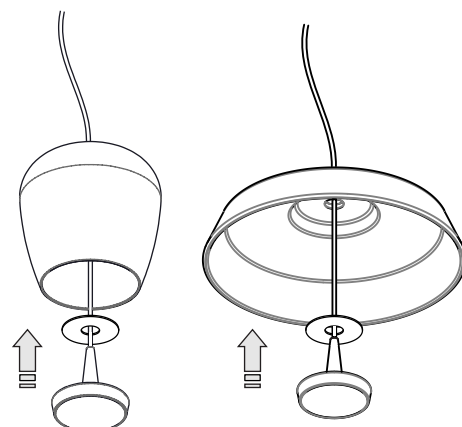


3

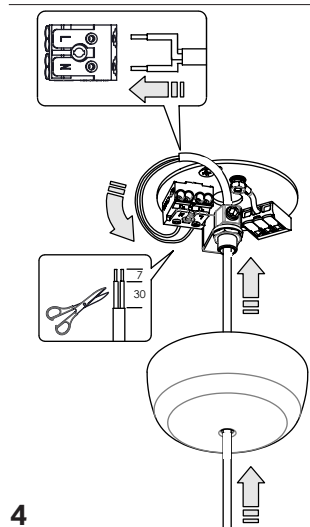


4

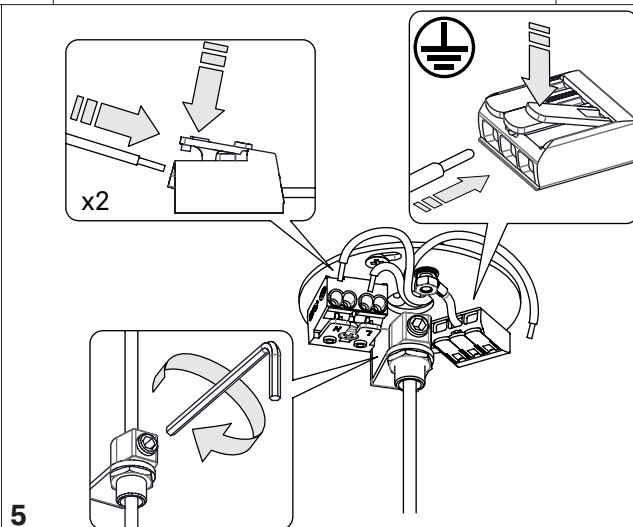

5

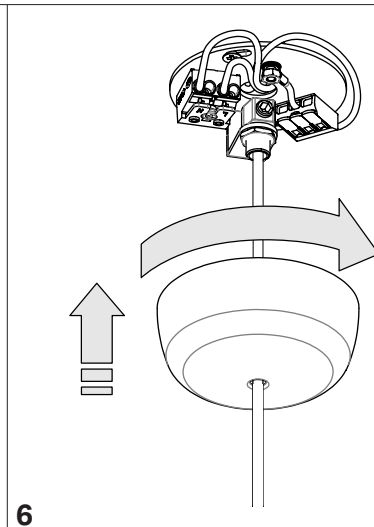


6



Muovere il paralume per bilanciare la lampada
Move the lampshade to balance the lamp

7

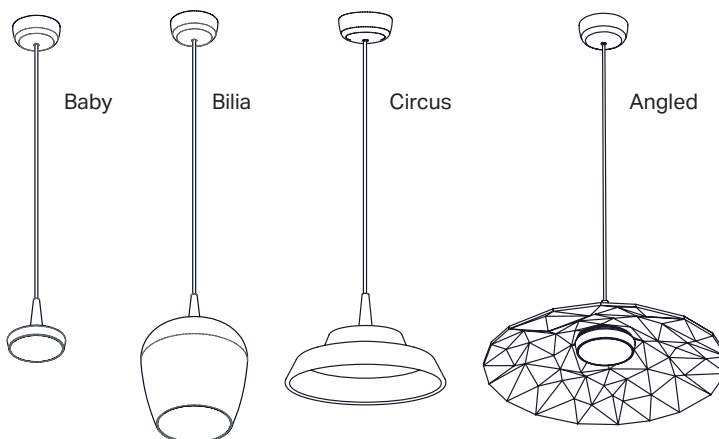

8

Visita il nostro sito per ulteriori informazioni e aggiornamenti sulle caratteristiche del prodotto
For more information and updates visit our website
www.zafferanoitalia.com

DESIGNED IN ITALY BY
ZAFFERANO SRL MADE IN PRC.
Zafferano srl Viale dell'Industria, 26
31055 Quinto di Treviso - Italy

NON INCLUSO
NOT INCLUDED

Baby sospensione / suspension
LBY10; LBY11

LED TRIAC CRI>90 230V 50/60 Hz IP40							
DIMENSIONS	CODE	METAL PART FINISHES	TOTAL WATT	LUMEN LED	LIGHT COLOR TEMPERATURE	BEAM ANGLE	LIGHT SOUCE CLASS
Ø 9,8 x 300 h cm / Ø 3,9 x 118,1 h in	LBY10	01 Alluminum, 11 White, 21 Black	8,0 W	645 lm	2700K	162°	G
	LBY11			678 lm	3000K		G

Bilia sospensione / suspension
LBA10; LBA20; LBA30; LBA40; LBA11; LBA21; LBA31; LBA41

LED TRIAC CRI>90 230V 50/60 Hz IP40							
DIMENSIONS	CODE	METAL PART FINISHES	TOTAL WATT	LUMEN LED	LIGHT COLOR TEMPERATURE	BEAM ANGLE	LIGHT SOUCE CLASS
Ø 18 x 324 h cm / Ø 7,1 x 127,6 h in	LBA30	01 Alluminum - Clear / Clear, 02 Alluminum - Clear / Silver, 03 Alluminum - Clear / Antique Gold, 04 Alluminum - Clear / Bronze, 05 Alluminum - Clear / Sandblasted, 11 White - Clear / Sandblasted, 12 White - Clear / Silver, 13 White - Clear / Antique Gold, 14 White - Clear / Bronze, 15 White - Clear / Sandblasted, 21 Black - Clear / Clear, 22 Black - Clear / Silver, 23 Black - Clear / Antique Gold, 24 Black - Clear / Bronze, 25 Black - Clear / Sandblasted	8,0 W	645 lm	2700K	162°	G
	LBA31			678 lm	3000K		G

LED TRIAC CRI>90 230V 50/60 Hz IP40							
DIMENSIONS	CODE	METAL PART FINISHES	TOTAL WATT	LUMEN LED	LIGHT COLOR TEMPERATURE	BEAM ANGLE	LIGHT SOUCE CLASS
Ø 18 x 324 h cm / Ø 7,1 x 127,6 h in	LBA10	01 Alluminum - Clear, 02 Alluminum - Silver, 03 Alluminum - Antique Gold, 04 Alluminum - Bronze, 11 White - Clear, 12 White - Silver, 13 White - Antique Gold, 14 White - Bronze, 21 Black - Clear, 22 Black - Silver, 23 Black - Antique Gold, 24 Black - Bronze	8,0 W	645 lm	2700K	162°	G
	LBA11			678 lm	3000K		G

LED TRIAC CRI>90 230V 50/60 Hz IP40							
DIMENSIONS	CODE	METAL PART FINISHES	TOTAL WATT	LUMEN LED	LIGHT COLOR TEMPERATURE	BEAM ANGLE	LIGHT SOUCE CLASS
Ø 27 x 333 h cm / Ø 10,6 x 131,1 h in	LBA40	01 Alluminum - Clear / Clear, 02 Alluminum - Clear / Silver, 03 Alluminum - Clear / Antique Gold, 04 Alluminum - Clear / Bronze, 05 Alluminum - Clear / Sandblasted, 11 White - Clear / Sandblasted, 12 White - Clear / Silver, 13 White - Clear / Antique Gold, 14 White - Clear / Bronze, 15 White - Clear / Sandblasted, 21 Black - Clear / Clear, 22 Black - Clear / Silver, 23 Black - Clear / Antique Gold, 24 Black - Clear / Bronze, 25 Black - Clear / Sandblasted	8,0 W	645 lm	2700K	162°	G
	LBA41			678 lm	3000K		G

LED TRIAC CRI>90 230V 50/60 Hz IP40							
DIMENSIONS	CODE	METAL PART FINISHES	TOTAL WATT	LUMEN LED	LIGHT COLOR TEMPERATURE	BEAM ANGLE	LIGHT SOUCE CLASS
Ø 27 x 333 h cm / Ø 10,6 x 131,1 h in	LBA20	01 Alluminum - Clear, 02 Alluminum - Silver, 03 Alluminum - Antique Gold, 04 Alluminum - Bronze, 11 White - Clear, 12 White - Silver, 13 White - Antique Gold, 14 White - Bronze, 21 Black - Clear, 22 Black - Silver, 23 Black - Antique Gold, 24 Black - Bronze	8,0 W	645 lm	2700K	162°	G
	LBA21			678 lm	3000K		G

Circus sospensione / suspension
CIR01; CIR11; CIR21; CIR31

LED TRIAC CRI>90 230V 50/60 Hz IP40							
DIMENSIONS	CODE	METAL PART FINISHES	TOTAL WATT	LUMEN LED	LIGHT COLOR TEMPERATURE	BEAM ANGLE	LIGHT SOUCE CLASS
Ø 23,5 x 300 h cm / Ø 9,3 x 118,1 h in	CIR01	00 White, 01 Blue, 02 Red, 04 Yellow, 05 Green	8,0 W	645 lm	2700K	162°	G
	CIR11			678 lm	3000K		
LED TRIAC CRI>90 230V 50/60 Hz IP40							
DIMENSIONS	CODE	METAL PART FINISHES	TOTAL WATT	LUMEN LED	LIGHT COLOR TEMPERATURE	BEAM ANGLE	LIGHT SOUCE CLASS
Ø 35 x 300 h cm / Ø 13,8 x 118,1 h in	CIR21	00 White, 01 Blue, 02 Red, 04 Yellow, 05 Green	8,0 W	645 lm	2700K	162°	G
	CIR31			678 lm	3000K		

Angled sospensione / suspension
ANG10; ANG11

LED TRIAC CRI>90 230V 50/60 Hz IP40							
DIMENSIONS	CODE	METAL PART FINISHES	TOTAL WATT	LUMEN LED	LIGHT COLOR TEMPERATURE	BEAM ANGLE	LIGHT SOUCE CLASS
Ø 40 x 300 h cm / Ø 15,7 x 118,1 h in	ANG10	01 White, 11 Gray, 21 Black	8.0 W	645 lm	2700K	162°	G
	ANG11			678 lm	3000K		

