








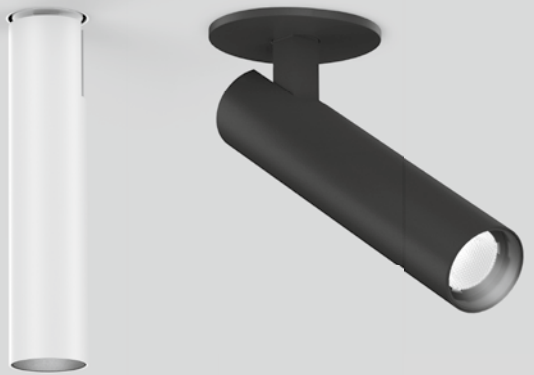





190851W_

190851BL_

190851Q_

190851B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	525 >90	3
3000K	555 >90	5


190151W_

190151BL_

190151Q_

190151B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	525 >90	3
3000K	555 >90	5



1.0 trimless
low recessed



IC rated




MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-match-recessed

MATCH


Ceiling recessed



193



329 | 347



415 | 509



571



589 | 685



723 | 729

1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|360° M-30° L80|50K

45-47 67 4-26

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-30° L80|50K

wire springs 45-47 75 4-26

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI	90243502

revision opening required
more options and specs on page 896

ALWAYS USE

quick connect driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI*	90243502

*revision opening required
more options and specs on page 896

WEVER & DUCRÉ

136 – 137