



DEEPER FIX IP20

INSTALLATION INSTRUCTIONS | MAY 2024

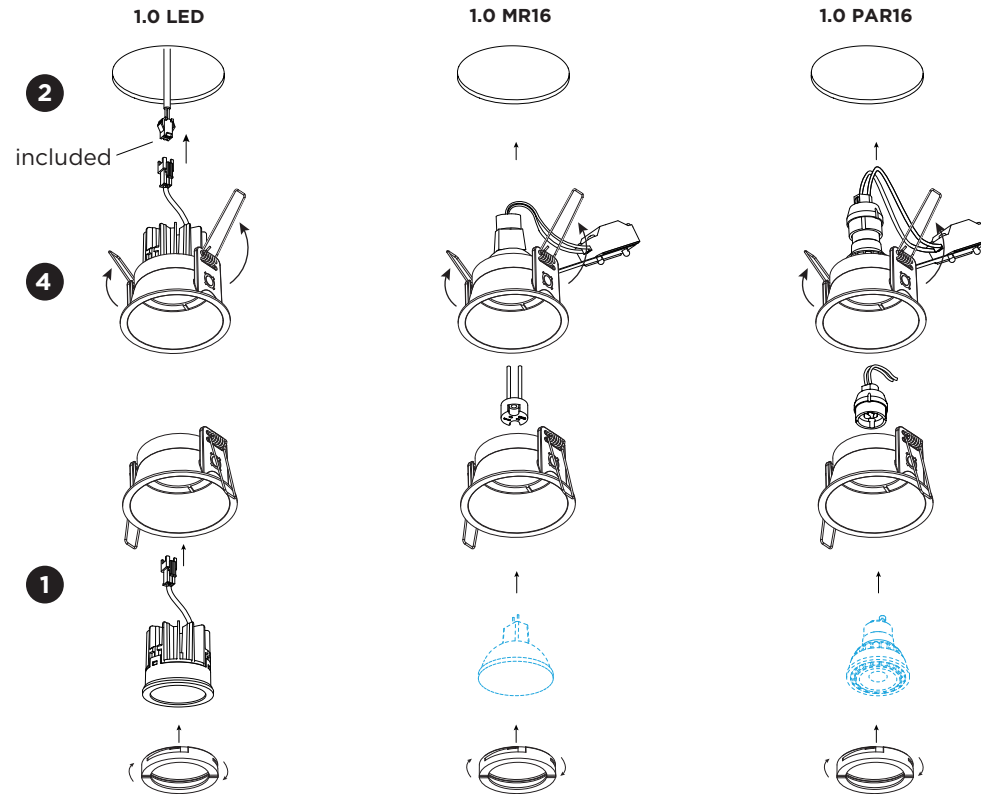

Driver must be powered off before connecting the cables.

Before connecting the luminaire/LED module to the driver please make sure the driver is not powered but disconnected from the mains. The driver can only be powered when the luminaire/LED module is already connected. Disregarding this instruction might damage or even destroy the luminaire/LED module.



DIMENSIONS

1.0 LED		
1.0 MR16		
1.0 PAR16		

MOUNTING INSTRUCTION

1 Put the light source in the assembly set by locking the lamp ring in the housing by turning it a quarter clockwise.

2 Make a hole in the ceiling according to the prescribed dimensions.


3 POWER CONNECTION

LED Always use a driver according to the specifications of the LED module.

Single connection




Multiple connection




PAR16/MR16

Single connection



Multiple connection



4 Push the springs upwards and insert the fixture in the ceiling hole.

WEVER & DUCRÉ BV

Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com


PB19-010-426-0A_v0



WEVER & DUCRÉ
LIGHTING

DEEPER FIX IP20


INSTALLATION INSTRUCTIONS | MAY 2024

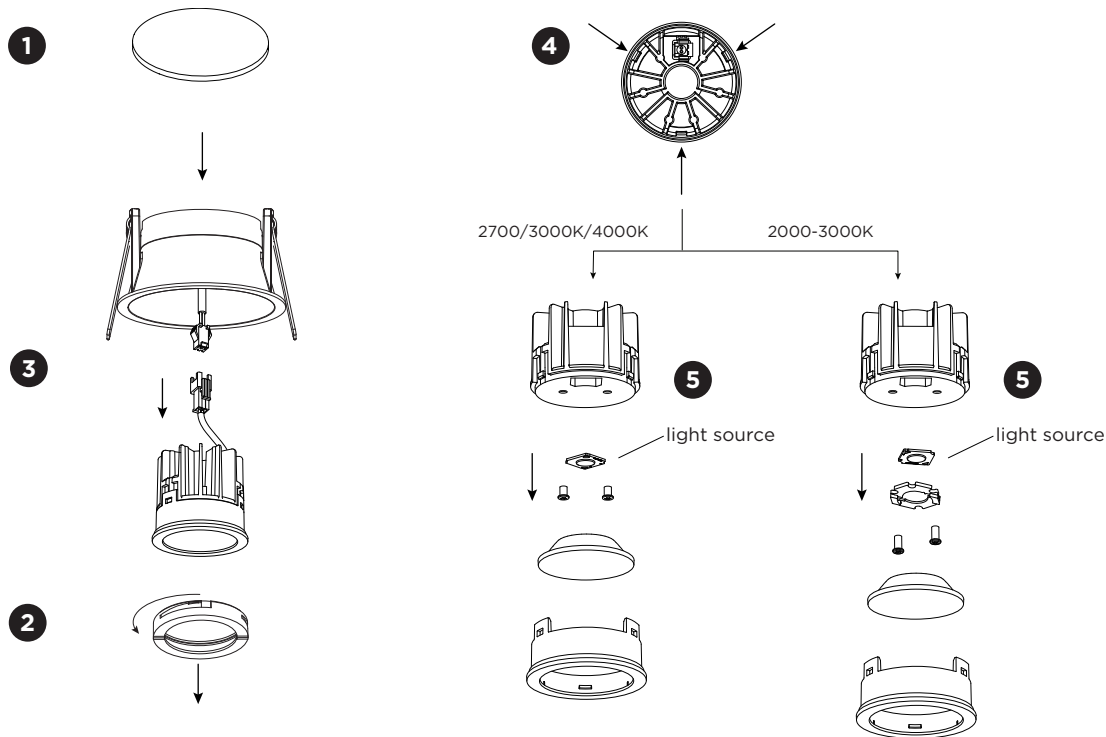

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source

- 1 Remove the fixture from the ceiling.
- 2 Hold and turn the front ring counterclockwise to remove the LED module.
- 3 Unplug the LED module and remove it from the luminaire.
- 4 Unclip the front ring at the three points.
- 5 Take out the lens and unscrew the light source to remove it.



The light source is replaceable by Wever & Ducré or by a professional with explicit authorisation. For more information please contact your local Wever & Ducré customer service point.



This luminaire contains a light source with the energy class D.



WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV

Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com