

FOX 189 MIG/MMA



INCLUDED

23000424 · MIG torch 15 AK · 3 m

43210138 · Ground cable · 16mm² · 2 m

21910116 · Flux Core welding wire reel
0,5 kg · Ø 0,9 mm

33805001 · Drive roll Ø 30mm · 0,6 - 0,8 mm
Knurled groove



OPTIONAL

43205028K · MMA Welding cable · 16mm² · 3 m

99900195 · Trolley

99900258 · HD AIR Trolley



FOX 189

Input voltage

(1ph) 230V 50/60Hz

Power 60%

1,9 KVA

MMA

MIG

U_o

54 V

24 V

Amp. Min-Max

20 ÷ 180 A

25 ÷ 180 A

Duty Cycle 40°C

180A @ 20%
75A @ 100%

180A @ 20%
75A @ 100%

Steel

0,6 ÷ 1,0 Ø mm

Stainless Steel

0,8 ÷ 1,0 Ø mm

Flux Core

0,9 Ø mm

Aluminium

0,8 ÷ 1,0 Ø mm

Brazing

0,8 ÷ 1,0 Ø mm

Ø Electrode

1,6 ÷ 4,0 Ø mm

Electrode Type

6013 - 7018 - CrNi

Insulation

H

Protec. Degree

IP22S

Dimens. (LxWxH)

480x220x385 mm

Box (LxWxH)

685x275x450 mm

Weight box/net

12,5 / 10,5 Kg

Code

99820051


Fox 

**MULTIPROCESS
INVERTERS**

**REAR CABLE
WRAP HOLDER**

**CABLES
LOCK**

**GAS
NO GAS**

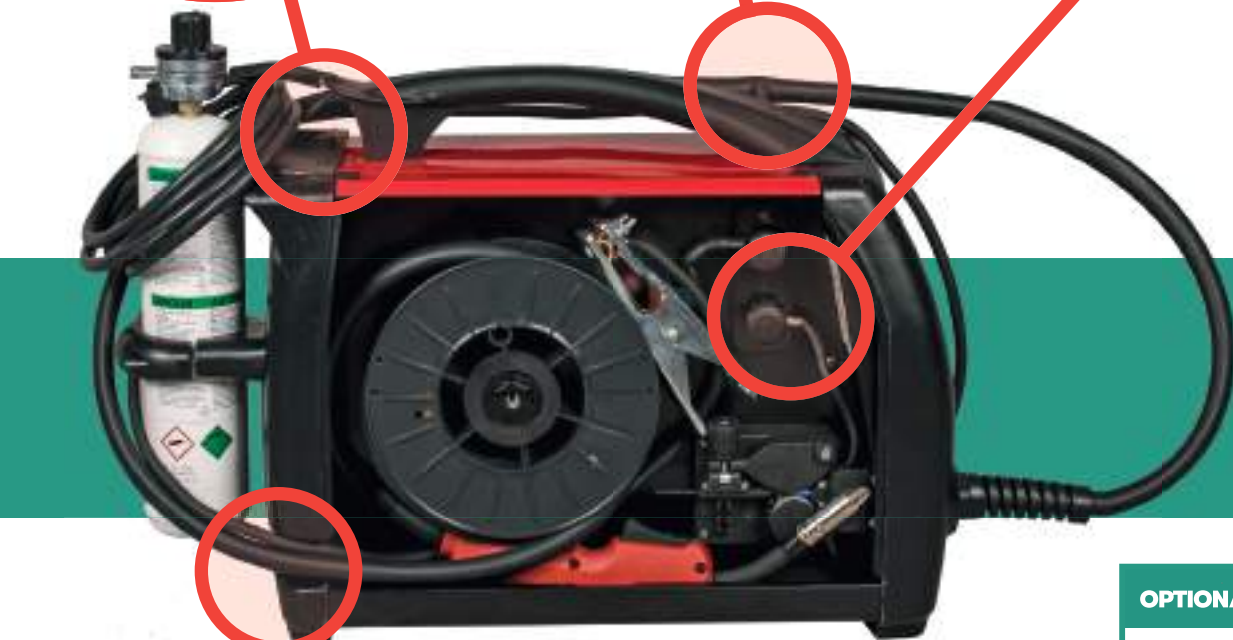

**ON BOARD MIG
GUN STORAGE**

**EASY TO
CARRY**

OPTIONAL "FULL GAS"



Trolley

99900195

OPTIONAL "EASY GAS"

Gas regulator

22905001

**Disposable Gas
cylinders**

Plastic Support

04600404

