

Shear cutting: inline measurement of wear and cut quality

During shear cutting of sheet metal materials, inline monitoring of the tool as well as of the cut surface parameters and component quality is currently not possible. Based on the Seebeck effect this invention enables dynamic monitoring of the manufacturing process for the first time. In addition to being used in new stamping dies, the system can also be integrated into existing dies. This avoids rejected parts and extends maintenance intervals.



Inline process monitoring by the tool itself


This invention enables real-time monitoring of process and part quality inline in the tool for the first time. The wear of the tool decisively determines the component quality and process stability. Continuous removal as well as stochastically occurring damage influence the geometry of the cutting surface and the burr. As a result, scrap parts accumulate, reducing manufacturing profitability. The feasibility of this has already been validated under industrial conditions.

- 01 Can be used independently of material and tool type
- 02 Instantaneous monitoring of process and cut surface characteristics
- 03 Maintains optimal tool performance
- 04 Easy retrofitting

REFERENCES:



View Patent Application

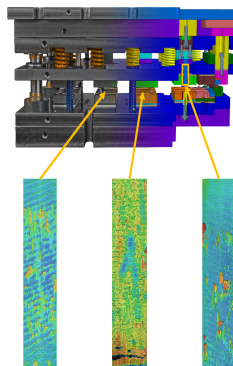

Sections of the punch states inside the test tool:
 - left: uncritical adhesion
 - right: localized material adhesion
 - center: severe wear (adhesion with chipping at the edge of the punch)



CHALLENGE

The design conditions in shear cutting tools make the implementation of sensors very difficult. The reasons are the limited space as well as the high surface pressure. Lubricants and contaminants increase the problem. Sudden tool damage and changes in the cutting edge geometry can only be detected in retrospect. This often leads to a large number of rejected parts. Maintenance intervals are defined based on experience before the actual wear limit. This directly reduces process profitability.

INNOVATION

The solution was to create a sensor that can be used despite the conditions in the shearing tool without impacting its performance. Based on the thermoelectric Seebeck effect, which leads to the generation of voltage in various sheet metal processings, it is possible to use the tool itself as a sensor. This allows instantaneous detection of stochastically occurring tool damage, as well as determination of the wear condition of the active elements independent of the wear mechanism that is occurring. The system enables the exact cuttingsurface shape determination inline at any stroke rate and for any tool.

01 Basic principles observed - 02 Technology concept formulated - 03 Experimental proof of concept - 04 Technology validated in lab - 05 Technology validated in relevant environment - 06 Technology demonstrated in relevant environment - 07 System prototype demonstrated in operational environment - 08 System complete and qualified

TRL 08
TRL 07
TRL 06
TRL 05
TRL 04
TRL 03
TRL 02
TRL 01

Technology Readiness Level (TRL)



Innovation from Research & Science –
 BayPAT markets inventions on behalf
 of the Bavarian universities and
 universities of applied sciences.

An invention of Technical
 University of Munich



As one of the largest technology transfer offices in Germany, BayPAT evaluates and commercializes innovations from 28 research institutions. With our extensive experience and expertise in patenting and licensing technologies and our comprehensive range of services, we are your partner of choice. For more information visit www.baypat.de

Bayerische Patentallianz GmbH
Stephan Ottmar
 sotthmar@baypat.de
 +49 (0)89 5480177-37
 Prinzregentenstr. 52
 80538 München

