

Dicolor LED

UTV2 SERIES

High Transparency &
Lightweight Outdoor
Rental LED Solution



Lightweight
Design



Higher Transparency
Rate



Outdoor & Indoor
Use



High Stability &
Reliability



Curve
Design



Right-Angle
Splicing



Multi-function
Splicing Installation

Applications



Concert Stage



Launch Event



Press Conference



Exhibitions



Festival Celebration




Transparency Rate

40%


Lower wind resistance

Supports indoor and outdoor
use, and the brightness can
be freely adjusted from


1000-3500nit

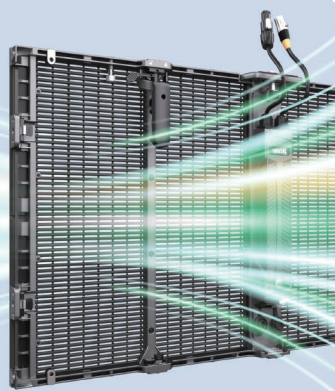

Lightweight

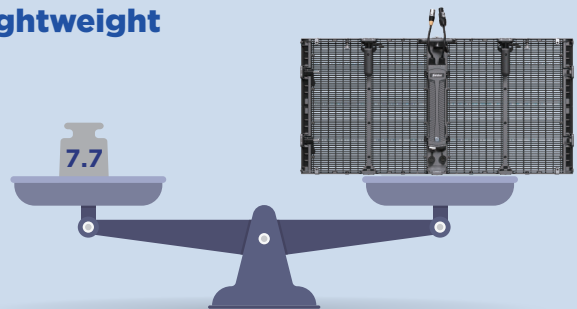


1000*500mm cabinet only 7.7Kg, thickness 80mm

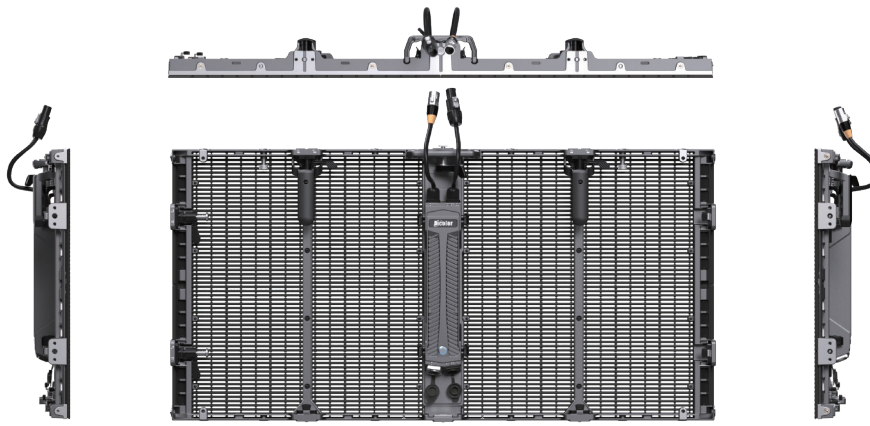


Single Person Installation

The cabinet is designed with three lifting locks. The middle lifting lock is a two-in-one hook design. one person can easily complete the lifting of the cabinet

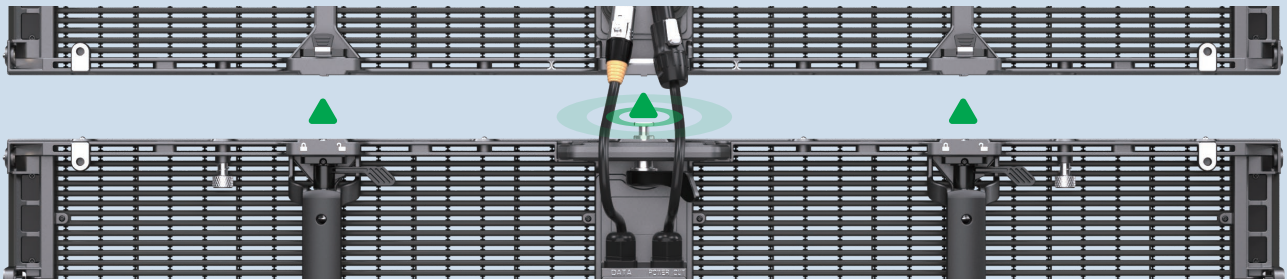


Multi-function splicing installation


Meet various styling needs

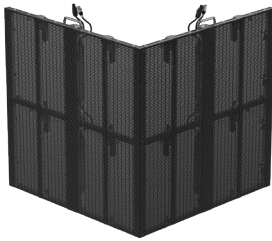

Right-Angle Splicing

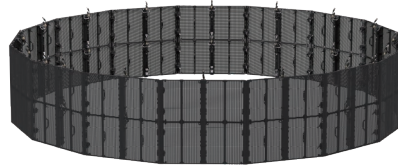

Curve splicing

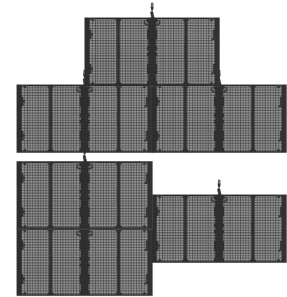

Styling Splicing

Product	UT-390V2	
Pixel pitch (mm)	3.9 - 7.8	
LED	SMD1921	
Cabinet material	Die-casting aluminum	
Cabinet dimensions	500x500 / 1000x500	
Brightness (nits)	1500	3500
Refresh rate (Hz)	≥7680	
Grayscale (bit)	16	
Power Consumption (Ave/MAX)	67 / 200	167 / 500
Ingress protection	IP65	
Maintenance	Front/Rear	
Certificate	CE / FCC / ETL	