

AF V3 Series

Inspire creativity, unlock new rental experience



**Rental
&
Stage**

AF-191V3 | 261V3 | 291V3 | 391V3

AF-290V3 | 390V3 | 480V3


**Touring
Display**

AF-290V3T | AF-390V3T |
AF-480V3T


**VP
&
XR**

AF-191V3 Pro | AF-261V3 Pro

Applications

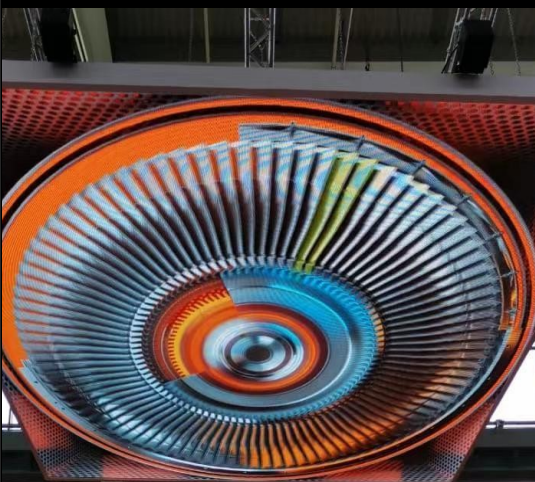

Corporate event

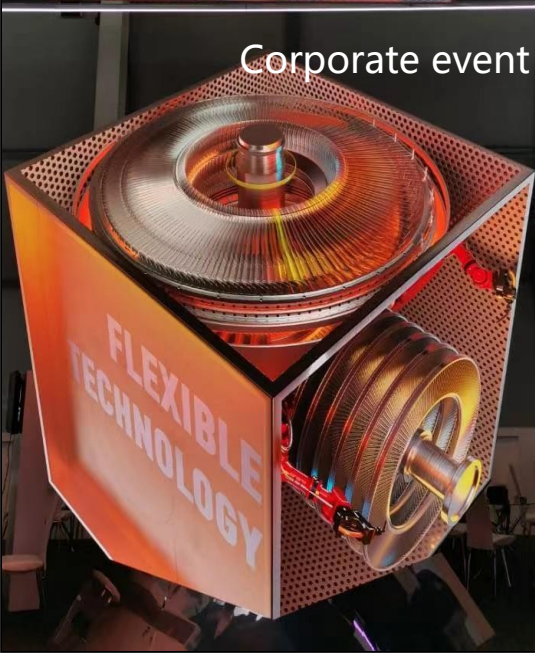

Concert stage/Live music



Public event




Broadcasting/VP



Auto show



Esports

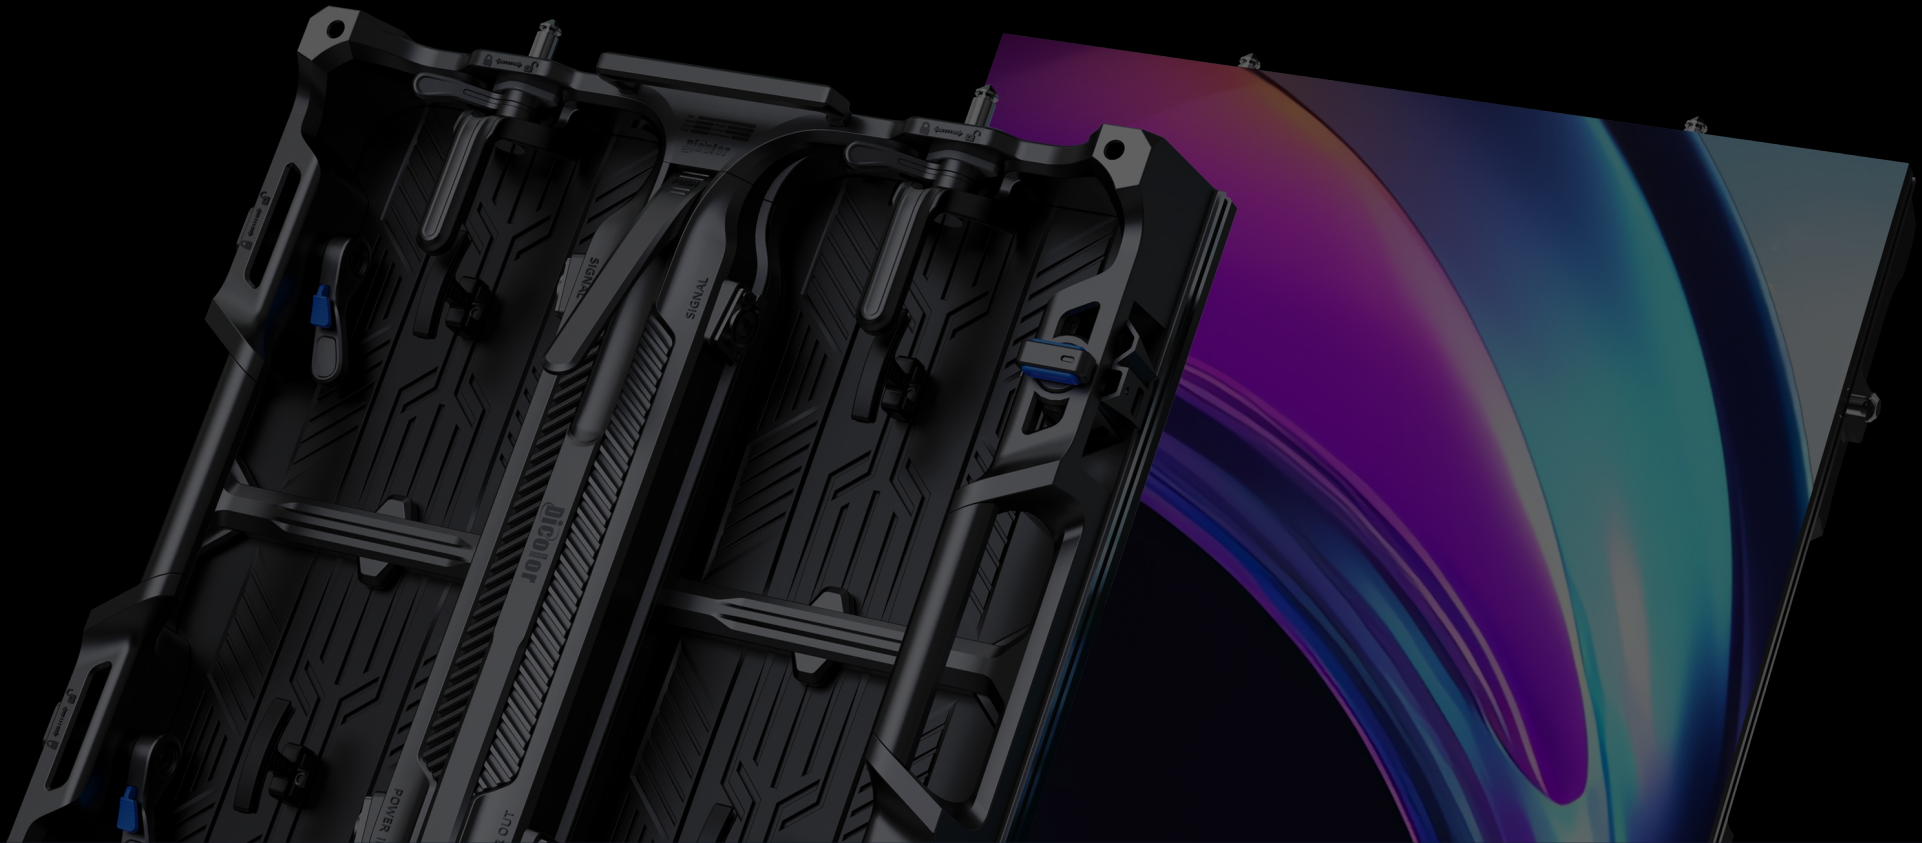

Automatic edge protection



Modular design



Front and rear service



Easy and quick installation



Versatile set up

Slim, but strong

8.5 Kg

500*500

13.5 Kg

500*1000

80 mm

Thickness

10 m


Max. hanging

Die-Cast Aluminum

Cabinet material



Slim, but strong

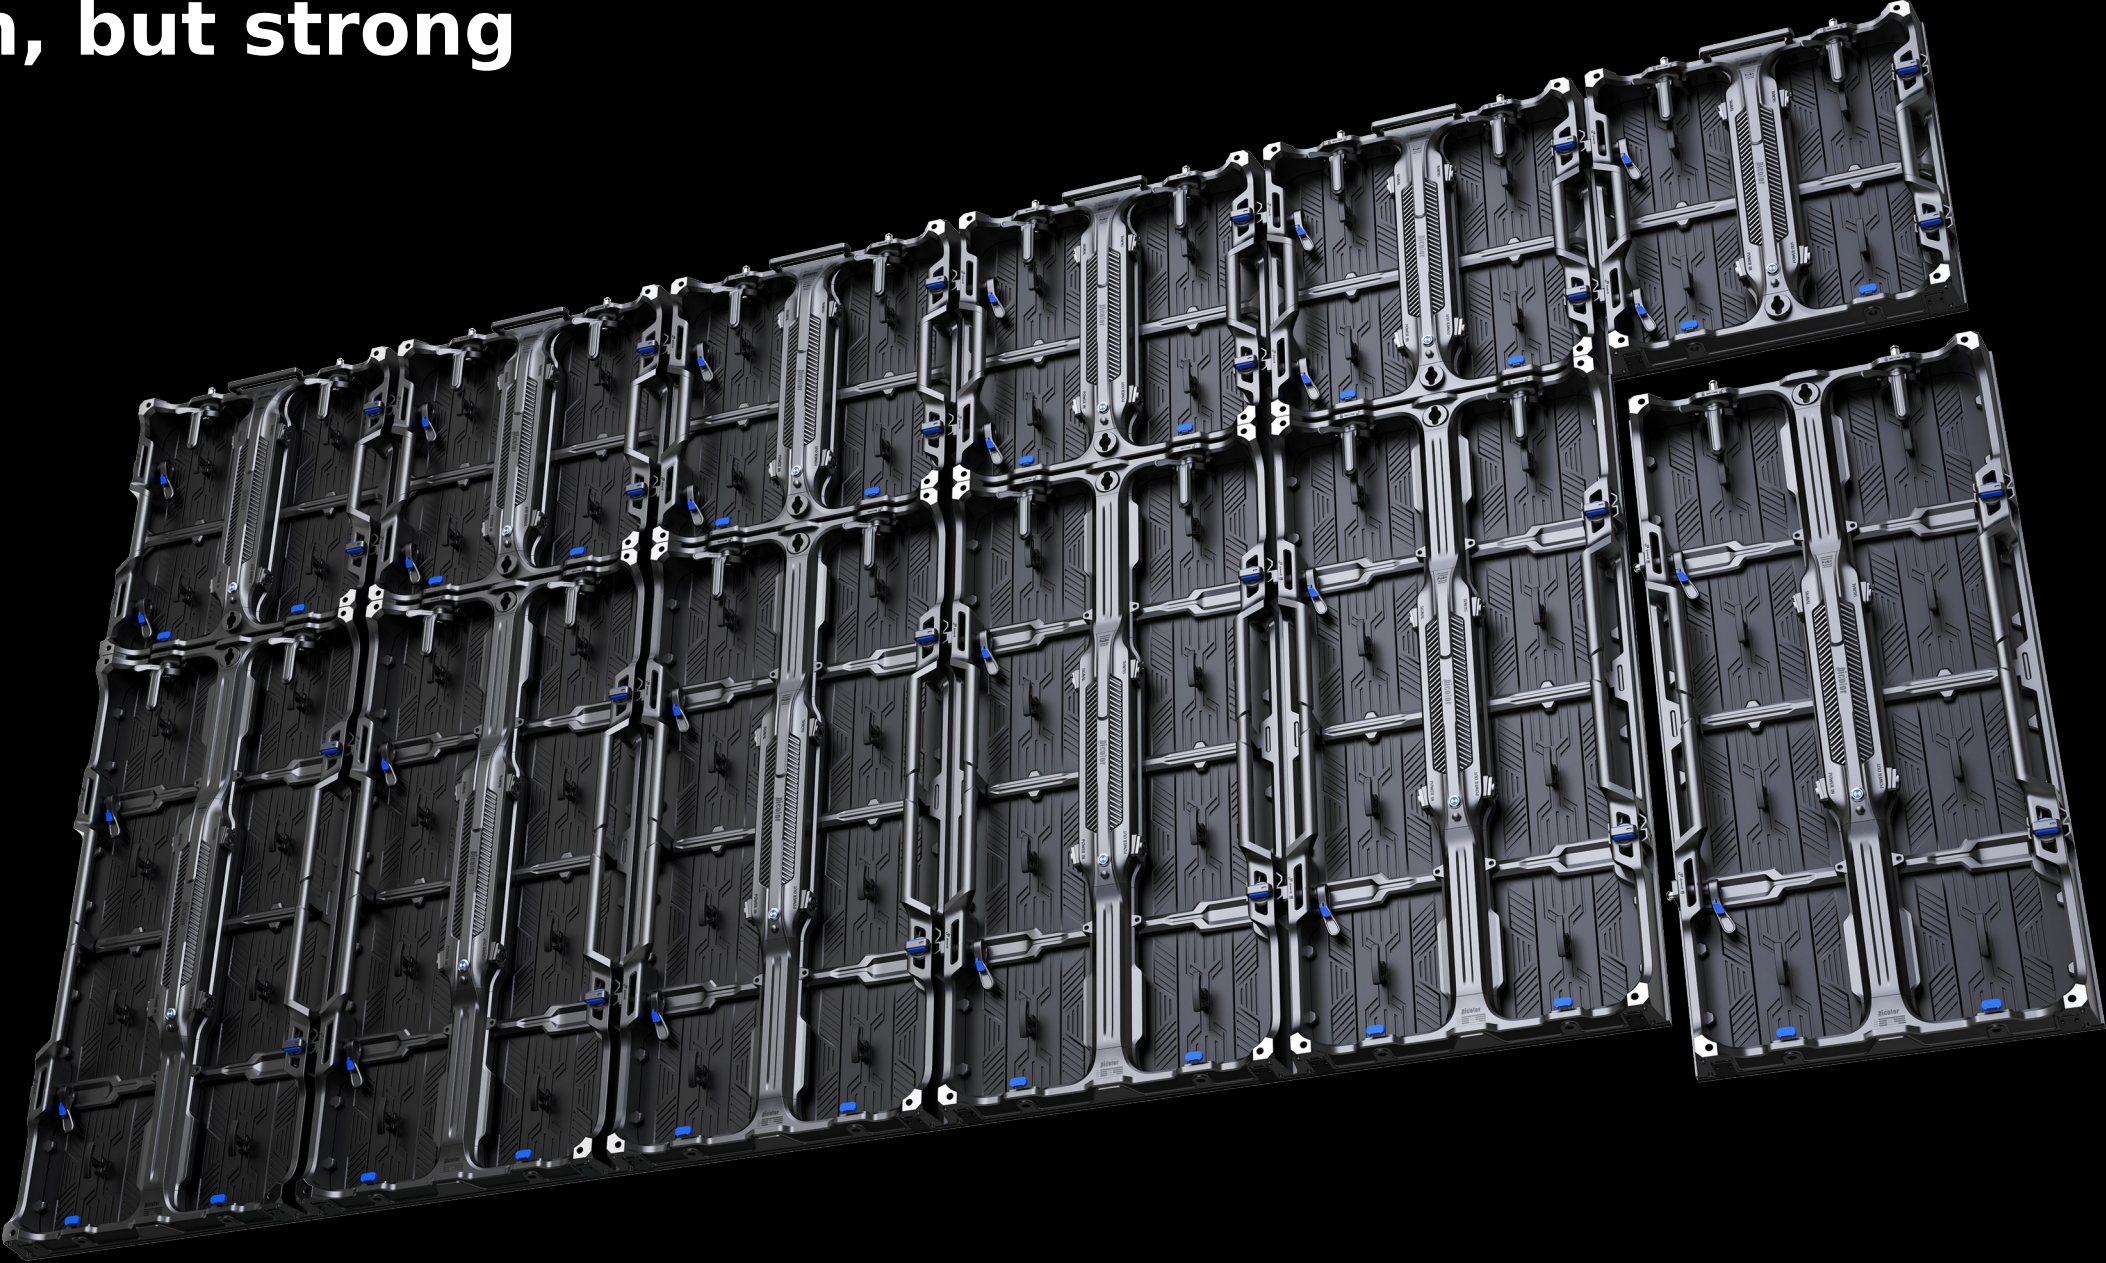

Modular design

Supports both front and rear maintenance,
the integrated PSU make repair and replacement of spare parts easy and cost-effective.



1 PSU

+



1 cabinet frame


+



4 modules

Faster and Safer on-site PSU replacement

- Patented PSU unlocking design
- 2 steps & one-hand operated
- Quick problem solving on-site

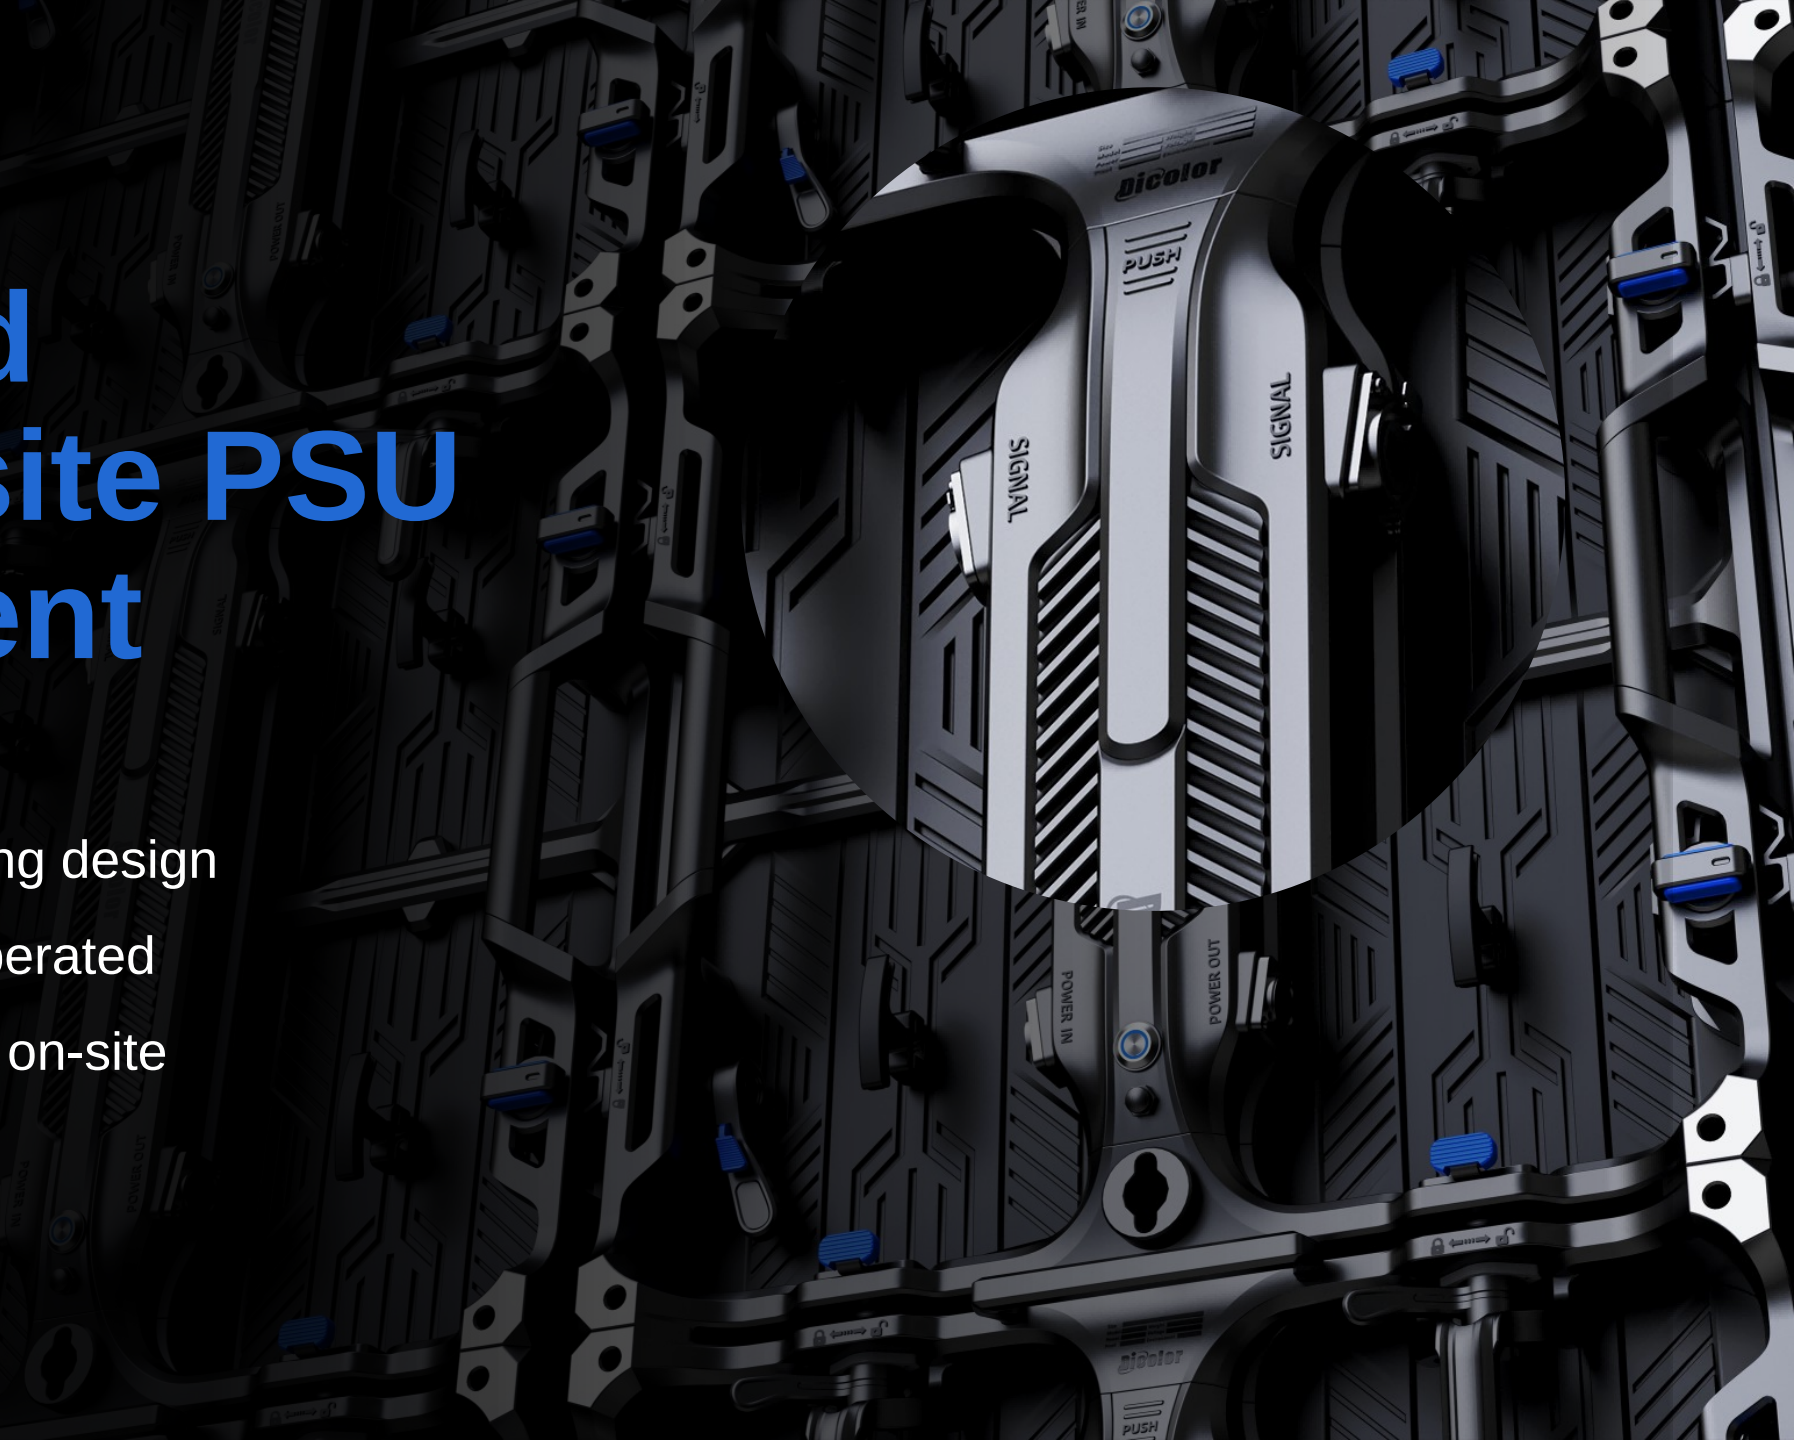

2 Steps & One-hand operated



Step1, press the "OPEN" button

Step2, pull-up and pull-out the lock by one hand

Faster & Smoother problem solving on-site

To solve the problem that the large screen PSU is not easy to replace and the poor flatness after replacement.

Innovative curve lock system



-5 ~ 10° 2.5° /unit

Curveable

7 choices


3 steps

Set up or tear down

Automatic edge protection




More than 2,000
tests, reducing pixel
damage drastically.

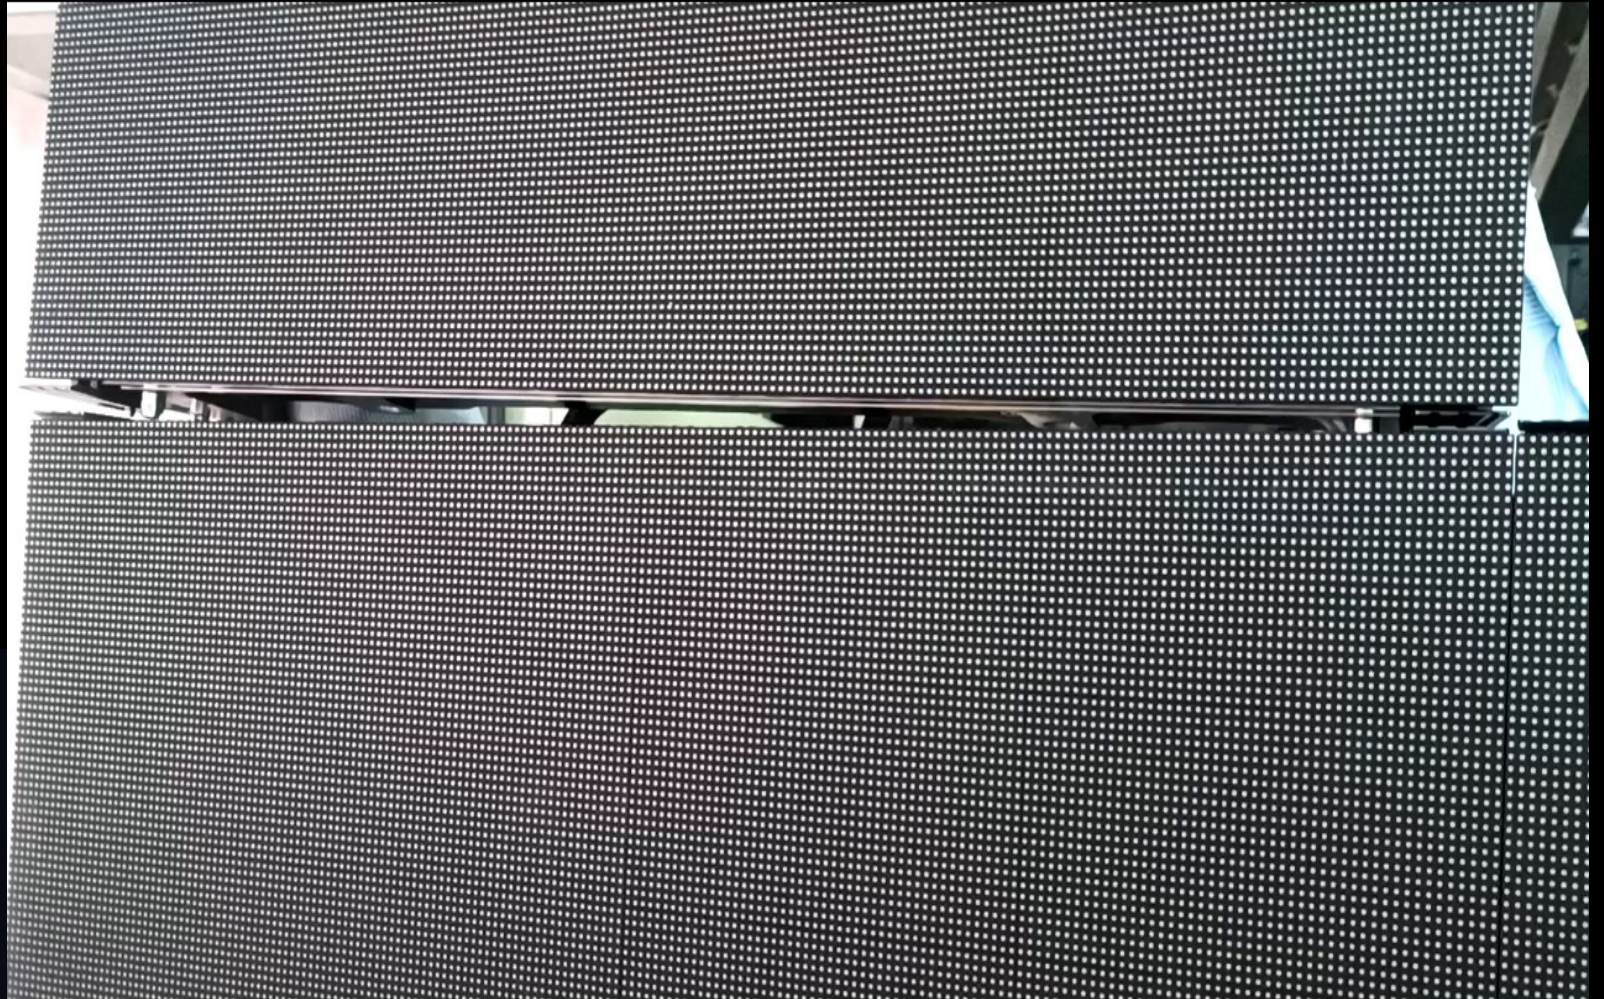


Platform design



Different pixel modules can be used on one cabinet frame, save money on product, accessories and training.

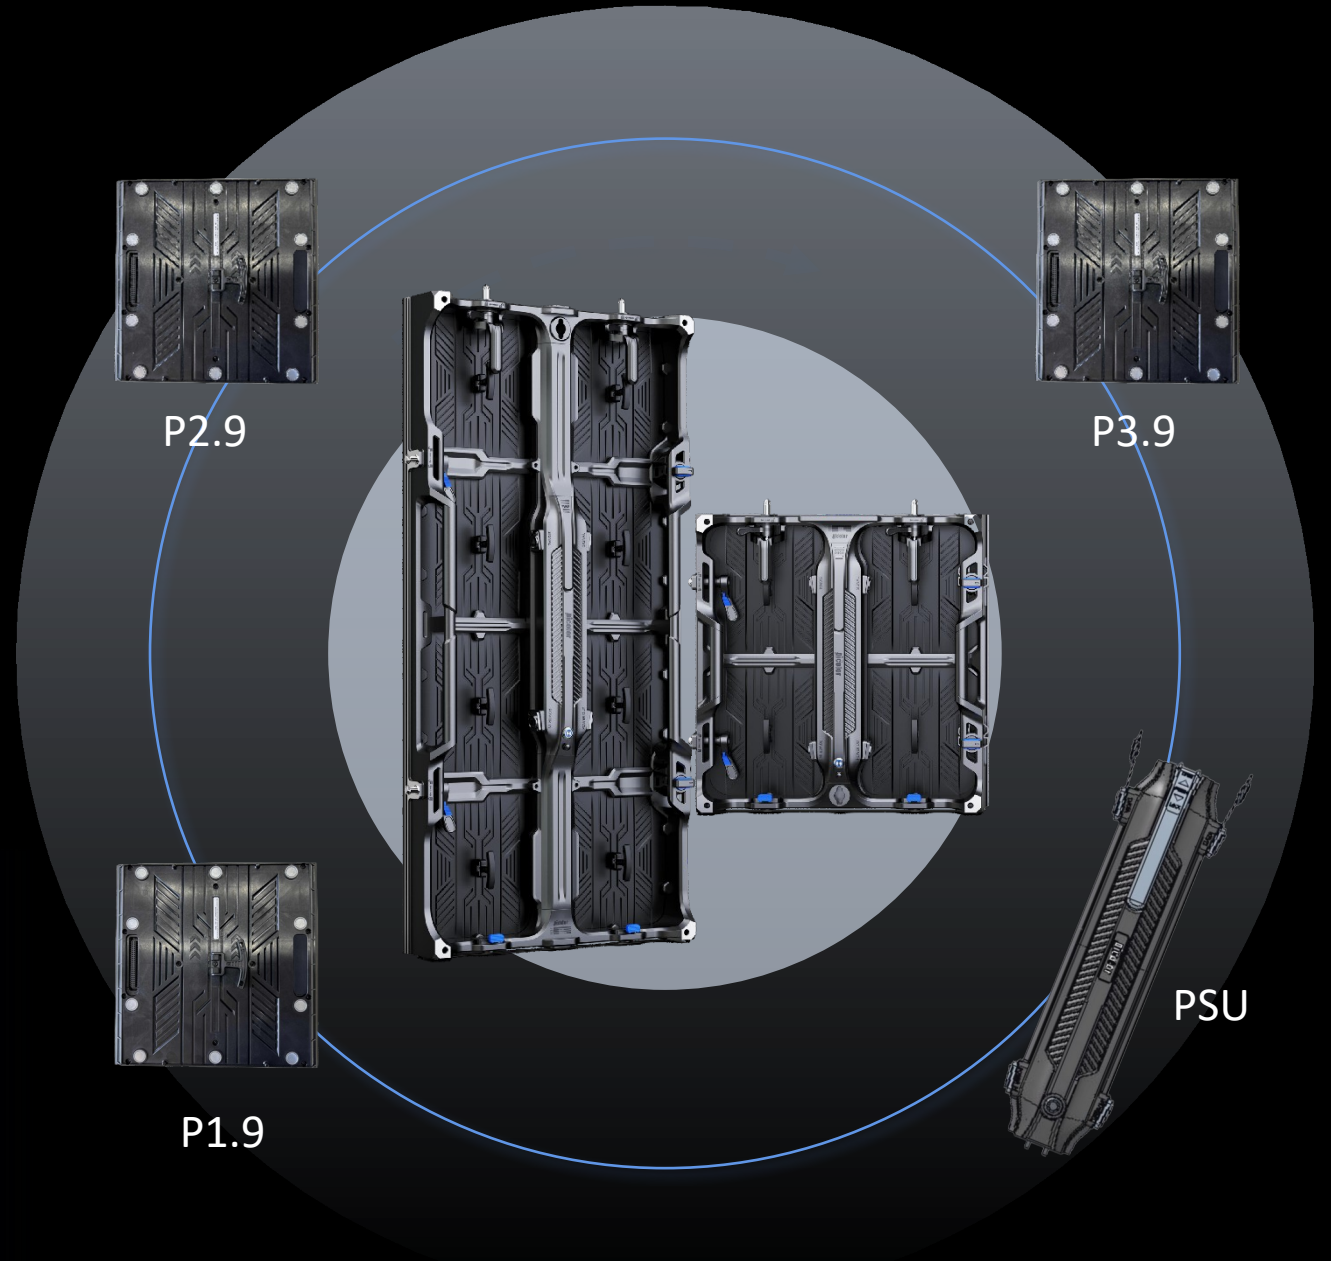

Corner cabinet

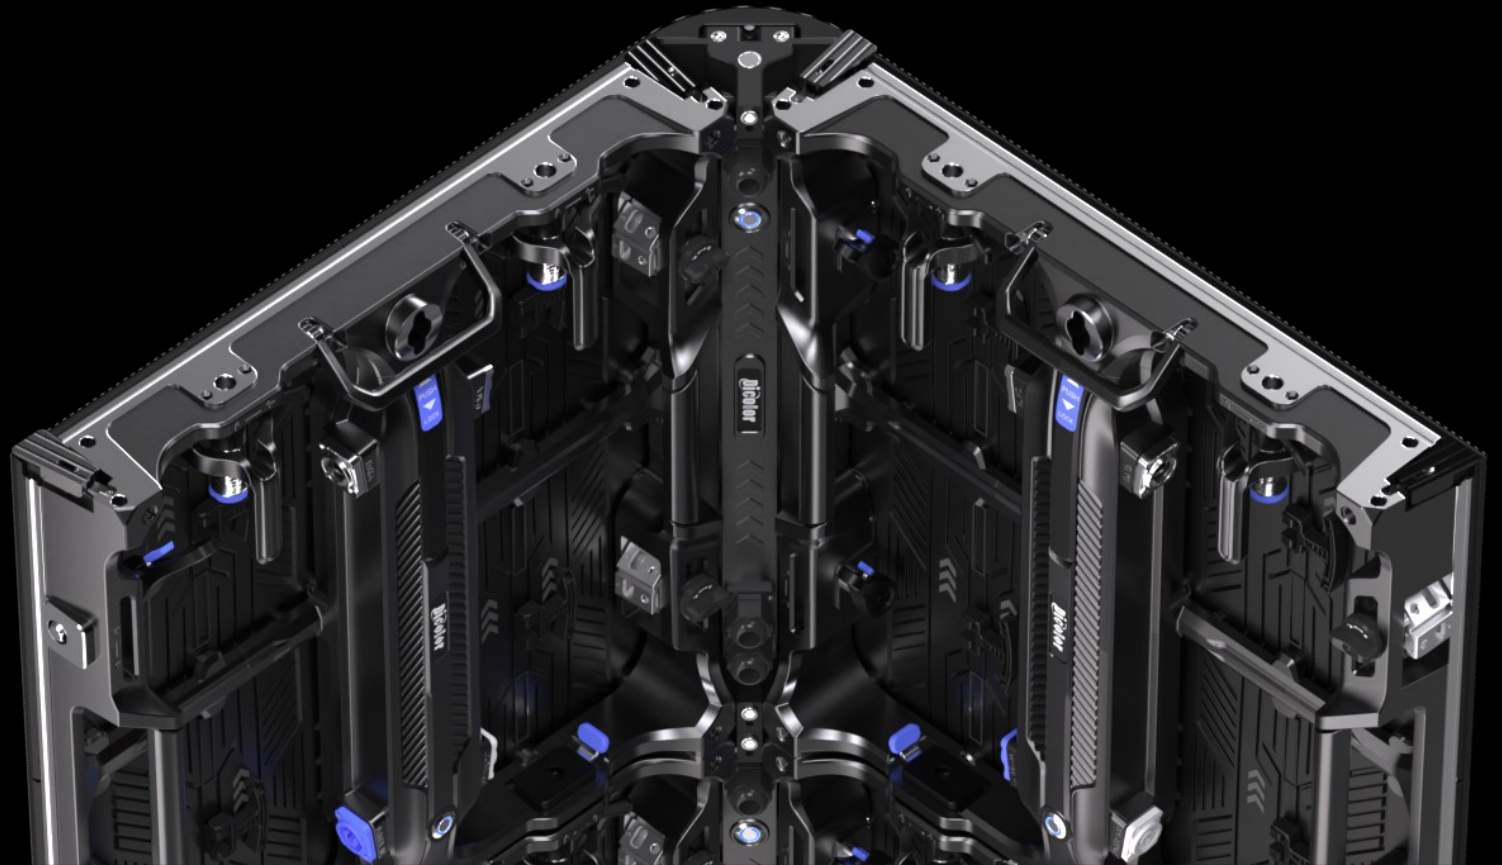


125x500mm

Cabinet size

**Die-Cast
Aluminum**

Cabinet material

The all-purpose events LED platform

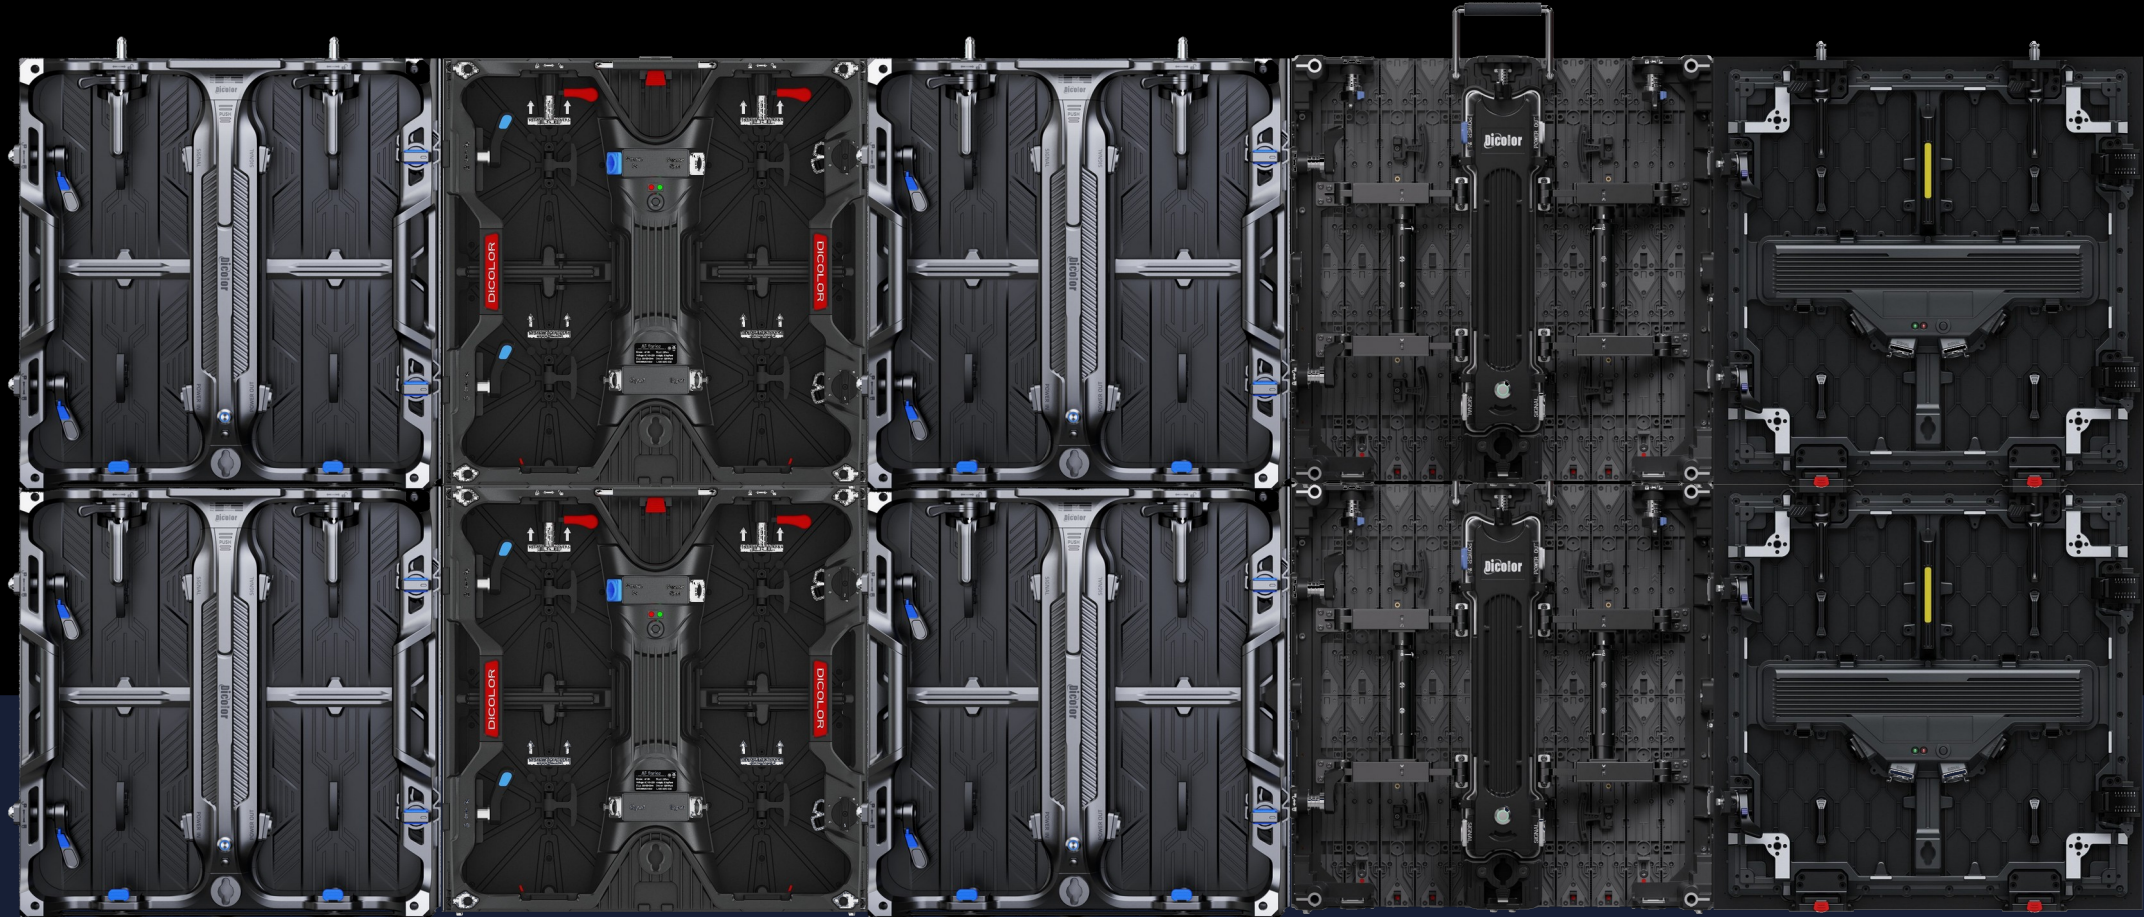

AF V3 Series

AF Series

AF V3 Series


US Series

UC Series

Wind-load resistant LED solution for touring application



Die-casting aluminum



Safe hanging or stacking installation, Resist wind speeds of up to 20 m/s when hanged 10m high



User friendly climbing steps



18-in-1 (3 x 6) touring cart system.



210sqm per 40HQ container, 2 rows and 2 columns. (include touring frame)

Specification



	AF-191V3	AF-261V3	AF-291V3	AF-391V3	AF-260V3	AF-290V3	AF-390V3	AF-690V3
LED Type	SMD	SMD	SMD	SMD	SMD	SMD	SMD	SMD
Pixel Pitch	1.9 mm	2.6 mm	2.9 mm	3.9 mm	2.6 mm	2.9 mm	3.9 mm	6.9 mm
Max. Brightness	800-1000 nit	800-1000 nit	800-1000 nit	800-1000 nit	4500 nit	4500 nit	4500 nit	4500 nit
CabinetMaterial	Die Casting Aluminum							
CabinetDimensions (LxWxD)	500x500	500x500	500x500/500*1000	500x500/500*1000	500x500	500x500/500*1000	500x500/500*1000	500x500/500*1000
CabinetResolution (HxV)	256x256	192x192	168x168/ 168x336	128x128/ 128x256	192x192	168x168/ 168x336	128x128/ 128x256	104x104/ 104x208
Weight Per Cabinet	8.5 Kg	8.5 Kg	8.5 Kg/13.5 Kg	8.5 Kg/13.5 Kg	8.8 Kg/13.5 Kg	8.8 Kg/13.5 Kg	8.8 Kg/13.5 Kg	8.8 Kg/13.5 Kg
Gray Scale	15 bit	16 bit	16 bit	16 bit	16 bit	16 bit	14 bit	14 bit
Refresh Rate	7680 Hz	7680 Hz	7680 Hz	7680 Hz	7680 Hz	7680 Hz	7680 Hz	7680 Hz
Viewing Angle(H/V)	160°/140°	160°/140°	160°/140°	160°/140°	140°/140°	140°/140°	140°/140°	140°/140°
IP Rating (Front/Rear)	IP40/IP21	IP40/IP21	IP40/IP21	IP40/IP21	IP65/IP54	IP65/IP54	IP65/IP54	IP65/IP54
Certificate	CE, ETL, FCC							

THANK YOU!



Dicolor Website



Dicolor Facebook

www.dicolorled.com