Dicolor LED

UT PLUS

The Large-Scale Visual Solution

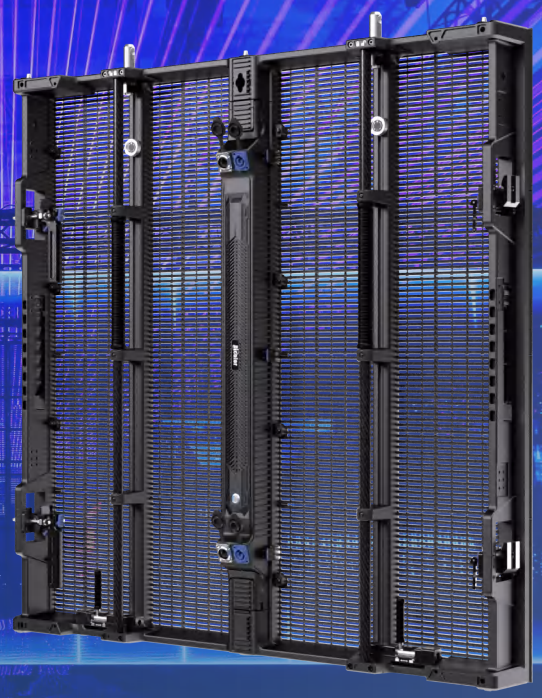

High Strength | Lightweight Design | High Transparency Rate | Energy-saving | Modular Design | Touring

Applications | Concert Stage | Launch Event | Press Conference | Exhibitions | Festival Celebration





High Strength

Supporting

20 meters

of high-strength hanging without external reinforcement.

Designed specifically for large-scale suspension scenarios, ideal for high-demand environments.

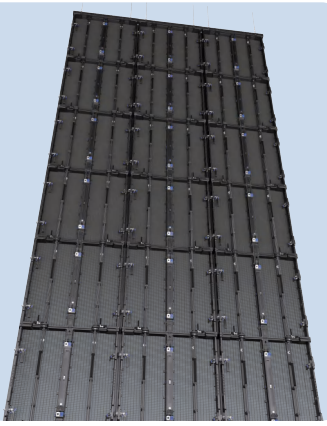

Lightweight Design

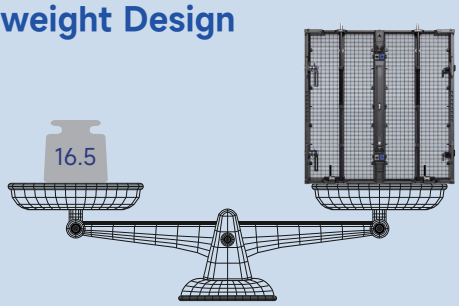

Constructed with an ultra-light magnesium alloy frame weighing only 16.5kg per unit for faster setup and easier handling.

Rental&Stage | DOOH | Commercial | Fine Pitch

Adjustable Blanking plate

Integrated side knobs allow quick adjustment of the shading panels, adapting smoothly to ambient light for optimal clarity.

Curved Splicing

Enables ±15° smooth curve splicing and custom 45° right-angle units to fit varied design requirements.

Energy-saving

Voltage-regulated design cuts power consumption by 20% compared to conventional screens for lower operating costs.

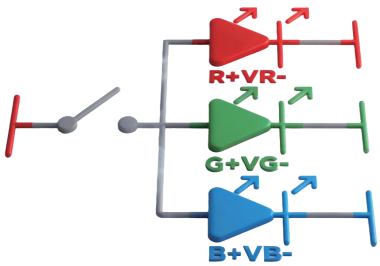

Touring Support

Compatible with touring frames for rapid suspension, supporting heights up to 25 meters—perfect for large-scale events.

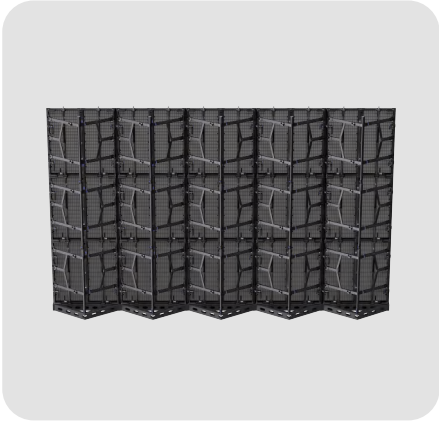

Product	UT-390 PLUS	UT-890 PLUS
Pixel pitch (mm)	3.9 - 7.8	8.9
LED	SMD1415	
Brightness (nits)	4500	
Cabinet material	Magnesium alloy	
Cabinet dimensions	1000x1000x100	
Resolution (mm)(WxH)	256*128	112*112
Cabinet Weight (kg)	16.5	
Grayscale (bit)	16	
Refresh rate (Hz)	7680	
Viewing Angle (H/V)	140°/140°	
Ingress protection	IP65/IP54	
Certificate	CCC/CE/FCC/ETL	

※ Parameters vary by configuration, welcome to consult.

Shenzhen Dicolor Group Co., Ltd

Add: No.13 Huiye Road, Tangjia Community, Fenghuang Street, Guangming District, Shenzhen, China.

Tel: +86-755-3369 1736 E-mail: inquiry@dicolor.cn Web: www.dicolorled.com