

TO BE THE FORERUNNER OF
LED DISPLAY INDUSTRY


Dicolor
LED

MS SERIES

The Era of Fixed Product for
Rental-Use Have Come

MS SERIES

The Era of Fixed Product for
Rental-Use Have Come

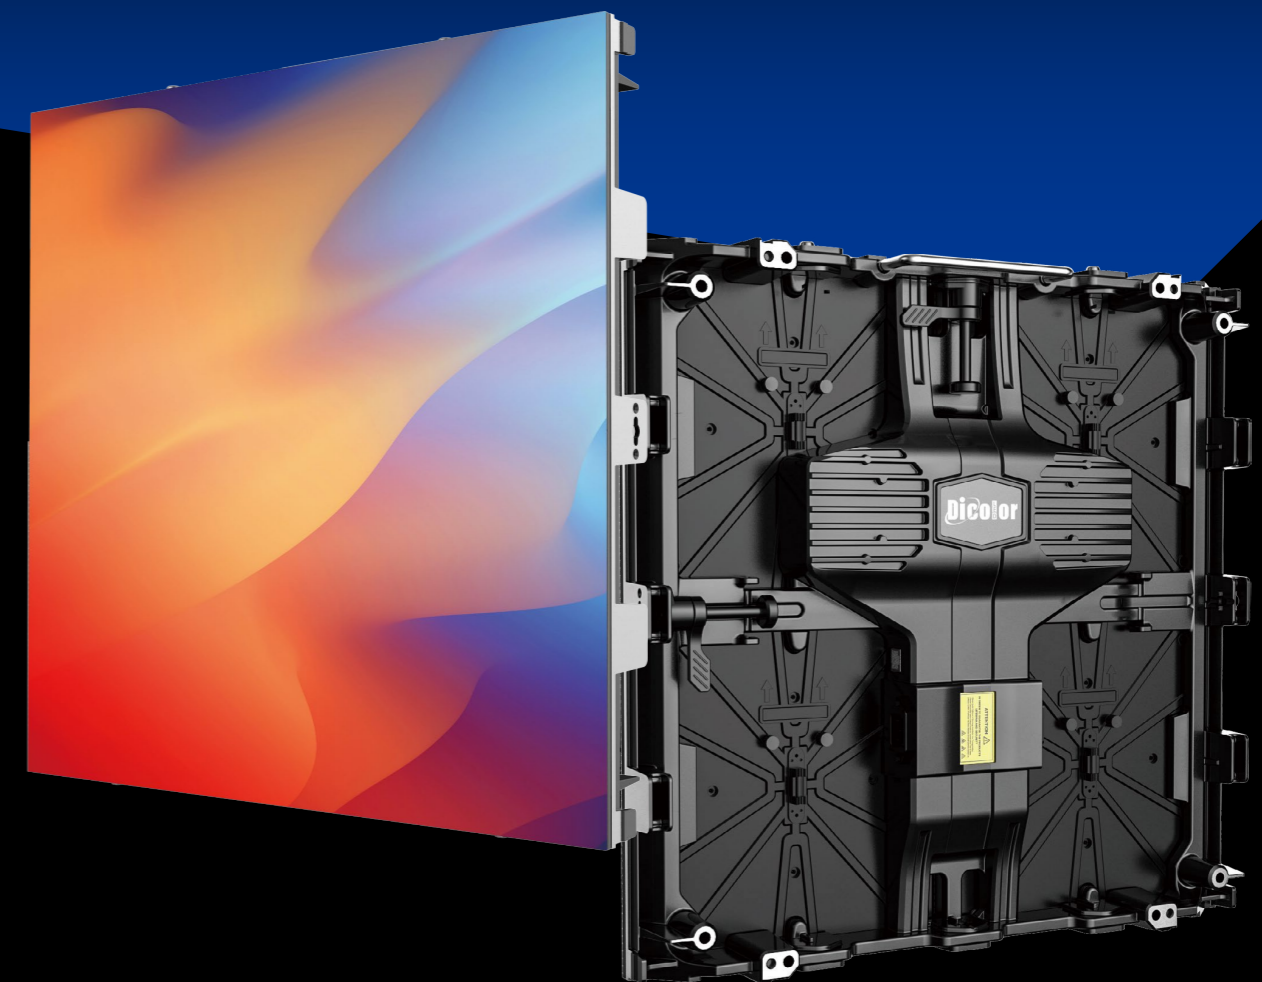

Dicolor
LED

Shenzhen Dicolor Group Co., Ltd

Address: No.13 Huiye Road, Tangjia Community, Fenghuang Street,
Guangming District, Shenzhen, China
Tel: +86-755-3369 1736 E-mail: inquiry@dicolor.cn
Website: www.dicolor.cn / www.dicolorled.com



03.2024



Front
Maintenance



Rectangular
Splicing



Multi
Functional




Curve
Design



Extremely
Light & Slim

Shenzhen Dicolor Group Co., Ltd

Appearance

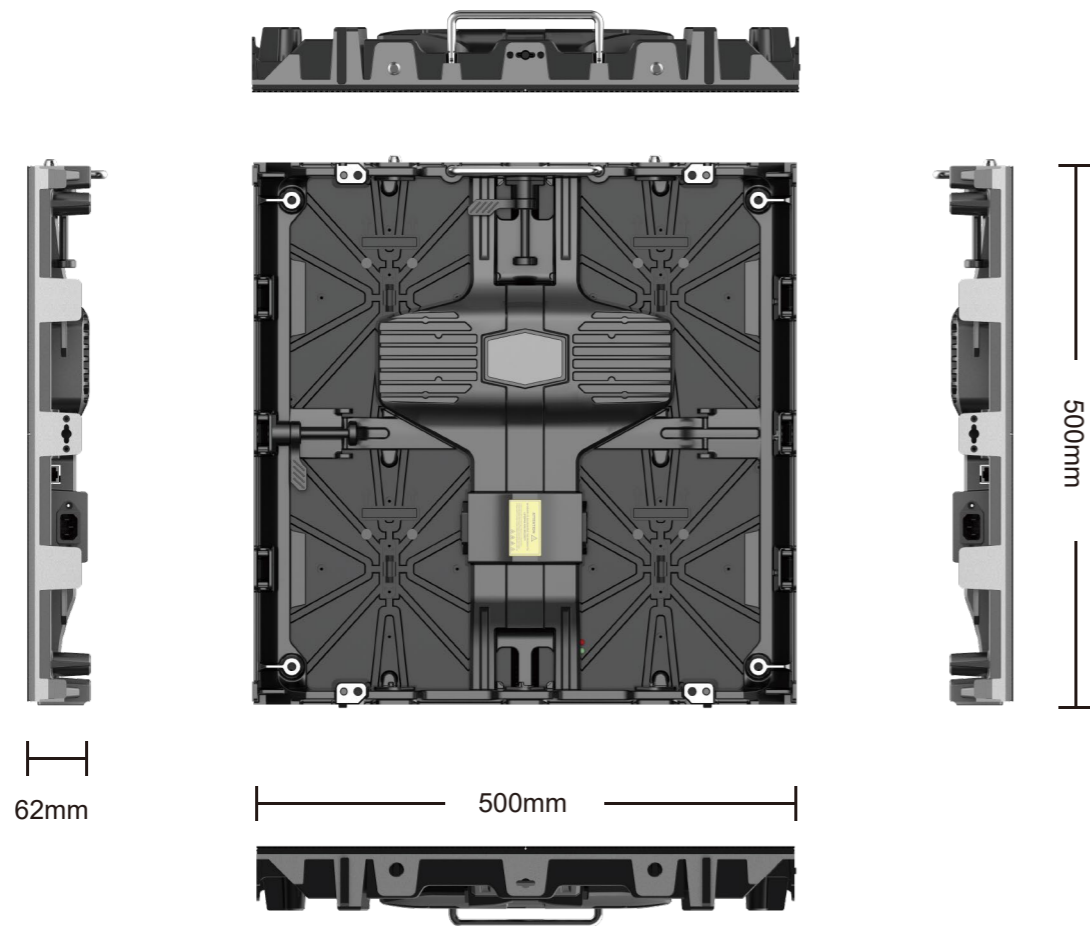


Product Specifications

Product	MS-191	MS-261	MS-291	MS-391
Pixel Pitch (mm)	1.953	2.604	2.97	3.91
Cabinet size (WxHxD/mm)	500 x 500 x 62	500 x 500 x 62	500 x 500 x 62	500 x 500 x 62
Cabinet Resolution	256 x 256	192 x 192	168x168	128 x 128
Cabinet Weight (Kg)	5.8	5.8	5.8	5.8
Brightness (Nits)	800	800	800	800
Refresh Rate (Hz)	≥7680	≥7680	≥7680	≥7680
Gray Scale (Bit)	15	16	16	16
IP Rating (Front/Rear)	IP40/IP21	IP40/IP21	IP40/IP21	IP40/IP21
Max./Avg Power Consumption(W/m²)	500/167	544/181	544/181	400/133
Curve	0 ~ 90°	0 ~ 90°	0 ~ 90°	0 ~ 90°

Parameters vary by configuration, welcome to consult.


Extremely light weight and thin thickness

Thickness less than 62mm, weight in 6kg, ahead of other suppliers.

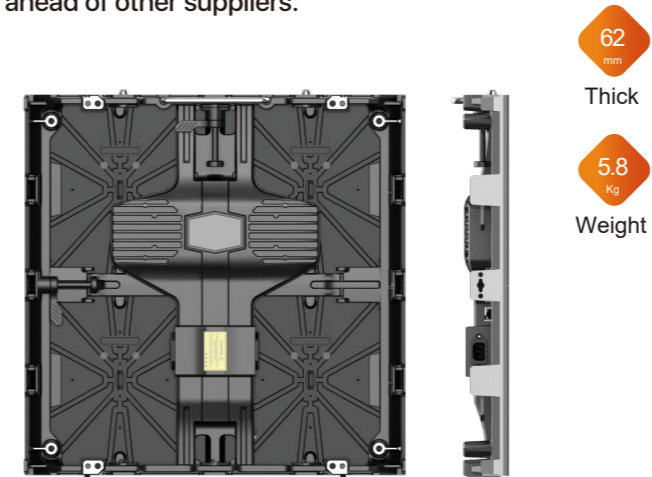


Front Maintenance

Modules and power receiving cards can be removed from the front.

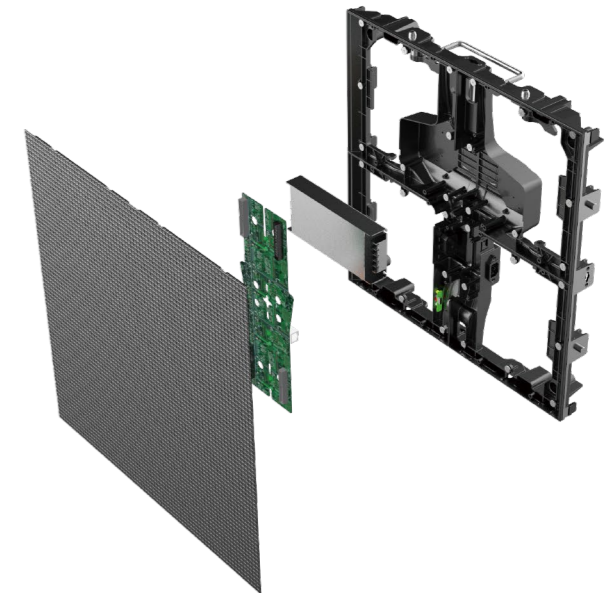


Multi-purpose with 1set screen

Support fixed use, but also compatible with rental use.

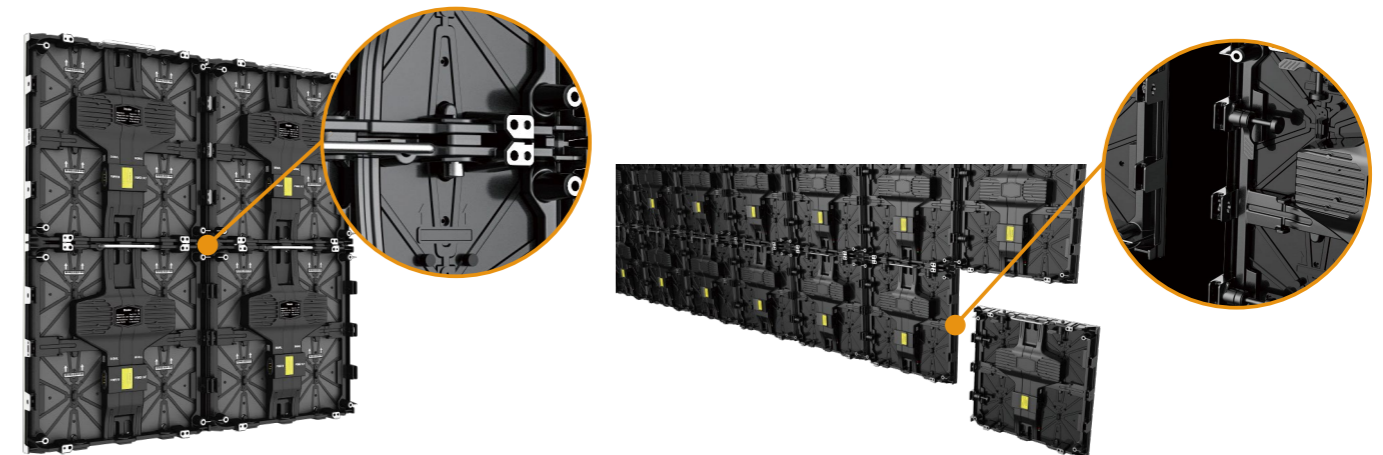

90° Rectangular Splicing

Supports 0 ~ 90° custom angles, can be made at 90° angle splicing.

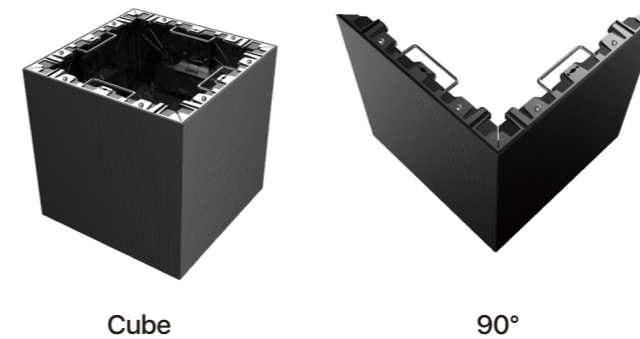

Ultra-thin installation

Using mounting bracket can be wall mounting. The thickness after installation is less than 100mm

