


Technical Specifications

Dimensions

Length	45 cm 17.7 "
Width	66.5 cm 26.2 "
Height	136 cm 53.5 "
Weight	100 kg 220.5 lb

Water

Production capacity	~37.85 L 10 GAL per day (at 70°F/21°C and 50% RH)
Operating temperatures	15°-43°C 59-109°F
Operating humidity	≥ 25% RH
Internal storage	40 L 10.6 GAL
Dispense option	Ambient
pH	6.5 - 8.5

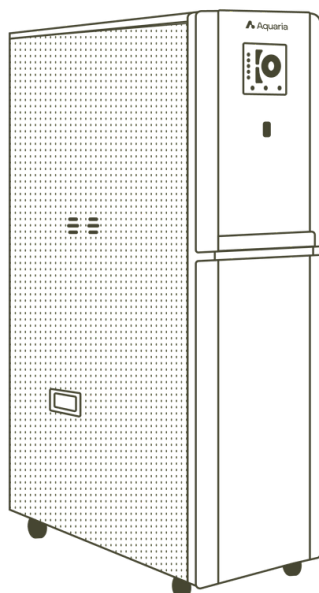

All water produced exceed EPA standards | 1-year warranty

Water quality independently certified by Amlabs Intertek (international) and SimpleLab (US)



Electrical

Energy efficiency	330 Wh / L
Rated voltage	110 V
Rated frequency	60 Hz
Rated power	1250 W
Rated current	9 A
Surge at startup	N/A

Others

Sound level	≤ 55 Db
Refrigerant type	R-410A
Refrigerant quantity	750 g
Waterproof level	IPX3
Type of protection against electrical shock	I
Climate type	ST
Storage temperature	-10°-60°C 14-140°F
Storage humidity	15-80% RH