


Technical Specifications

Dimensions

Length	76 cm 29.9 "
Width	111 cm 43.7 "
Height	172.2 cm 67.7 "
Weight	350 kg 771.6 lb

Water

Production capacity (@ 86°F / 80% RH)	250 L 66 GAL per day
Operating temperatures	15°-43°C 59-109°F
Operating humidity	≥ 25% RH
Internal storage	125 L 31.7 GAL
Dispense option	Ambient
pH	6.5 - 8.5

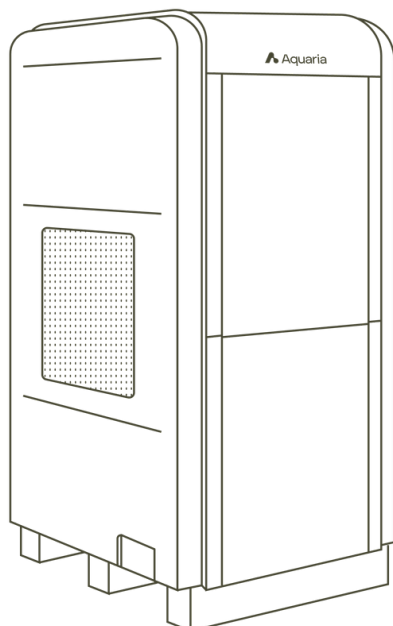

All water produced exceed EPA standards | 3-year warranty

Water quality independently certified by Amlabs Intertek (international) and SimpleLab (US)



Electrical

Production efficiency (@ 86°F / 80% RH)	0.24 kWh/L (0.9 kWh/gal)
Rated voltage	AC220V/1PH
Rated frequency	60 Hz
Rated power	3.00 kW
Rated current	12 A
Surge at startup	16.5 A
Breaker	20AMP - double pole breaker compatible with service panel

Others

Sound level	≤ 64 Db
Refrigerant type	R-410A
Refrigerant quantity	1.6 kg
Waterproof level	IPX3
Type of protection against electrical shock	I
Climate type	ST
Storage temperature	-10°-60°C 14-140°F
Storage humidity	15-80% RH

**Water For a Future
We Can Trust.**

www.aquaria.world | info@aquaria.world | +1-888-589-4605