



Product Snapshot

2026

Table of Contents

QC Module	01A	Nano	01B
Micro	01C	Macro	01D
Catenary	01E	LumienVIBE	01F
Adapters	01G		
Area/Path	02A	Directional	02B
Flood	02C	Wall/Step	02D
Underwater	02E	LumienFUEGO	02F
Brass Micro	02G	Accessory	02H
Area/Path	03A	Directional	03B
Flood	03C	Pendant	03D
Step	03E	Wall	03F
Aluminum Micro	03G	Accessory	03H
LumienACE	04A	LumienARC	04B
Lamp	04C	Transformer	04D

QUICK CONNECT

BRASS

ALUMINUM

SPECIALTY



QC Modules

01A



Full Nano

Antique Black

Brass - Antique/Black, Quick Connect Series Module. IP68 Rated When Assembled.

N4B1-1.5W-27K-15-A

Wattage/VA:	1.5/2.56	Lumens:	100
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	15°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

N4B1-1.5W-27K-30-A

Wattage/VA:	1.5/2.56	Lumens:	141
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

N4B1-1.5W-30K-15-A

Wattage/VA:	1.5/2.56	Lumens:	113
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	15°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

N4B1-1.5W-30K-30-A

Wattage/VA:	1.5/2.56	Lumens:	149
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

N4B1-2.5W-27K-15-A

Wattage/VA:	2.5/3.97	Lumens:	163
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	15°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

N4B1-2.5W-27K-30-A

Wattage/VA:	2.5/3.97	Lumens:	217
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

N4B1-2.5W-30K-15-A

Wattage/VA:	2.5/3.97	Lumens:	172
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	15°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

N4B1-2.5W-30K-30-A

Wattage/VA:	2.5/3.97	Lumens:	232
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

N7B1-2.5W-30-(A/BK)* LUMIEN PRO

Wattage/VA:	2.5/4.02	Lumens:	132 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	With PRO Remote
RGB:	No		

N8B1-2.5W-27K-30-(A/BK)* LUMIEN PRO

Wattage/VA:	2.5/4.02	Lumens:	27K: 91
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	With PRO Remote
RGB:	Yes		

N8B1-2.5W-30K-30-(A/BK)* LUMIEN PRO

Wattage/VA:	2.5/4.02	Lumens:	30K: 93
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	With PRO Remote
RGB:	Yes		

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.



Half Nano

Antique

N4B2-2W-27K-30-A

Wattage/VA:	2/3.21	Lumens:	203
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

N4B2-2W-30K-30-A

Wattage/VA:	2/3.21	Lumens:	209
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

Nano Knuckle

Antique Black

N4B3-3W-30K-30-A

Wattage/VA:	3/5.2	Lumens:	264
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

N7B3-3W-30-(A/BK)* LUMIEN PRO

Wattage/VA:	3/4.81	Lumens:	146 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	With PRO Remote
RGB:	No		

N8B3-3W-27K-30-(A/BK)* LUMIEN PRO

Wattage/VA:	3/4.81	Lumens:	27K: 105
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	With PRO Remote
RGB:	Yes		

N8B3-3W-30K-30-(A/BK)* LUMIEN PRO

Wattage/VA:	3/4.81	Lumens:	30K: 104
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	30°	Dimmable:	With PRO Remote
RGB:	Yes		

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.



Micro Module

Antique  Black  Raw 

M4B1-3.5W-27K-40-A

Wattage/VA:	3.5/5.59	Lumens:	316
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-3.5W-27K-60-A

Wattage/VA:	3.5/5.59	Lumens:	318
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-3.5W-30K-40-A

Wattage/VA:	3.5/5.59	Lumens:	327
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-3.5W-30K-60-A

Wattage/VA:	3.5/5.59	Lumens:	326
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-5.5W-27K-40-(A/R)

Wattage/VA:	5.5/8.66	Lumens:	428
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-5.5W-27K-60-A

Wattage/VA:	5.5/8.66	Lumens:	420
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-5.5W-30K-40-A

Wattage/VA:	5.5/8.66	Lumens:	472
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-5.5W-30K-60-A

Wattage/VA:	5.5/8.66	Lumens:	435
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

MOB1-4.5W-AMBR-A*

LUMIEN PRO

Wattage:	4.5/7.01	Lumens:	150 MAX
Wavelength:	Over 580	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	With PRO Remote
RGB:	Amber		

M7B1-4.5W-15-A*

LUMIEN PRO

Wattage/VA:	4.5/6.48	Lumens:	352 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	No		

M7B1-4.5W-40-(A/BK)*

LUMIEN PRO

Wattage/VA:	4.5/6.12	Lumens:	352 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	No		

M7B1-4.5W-60-A*

LUMIEN PRO

Wattage:	4.5/6.12	Lumens:	316 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	With PRO Remote
RGB:	No		

M8B1-3W-27K-40-(A/BK)*

LUMIEN PRO

Wattage/VA:	3/4.83	Lumens:	27K: 129
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	Yes		

M8B1-3W-30K-40-(A/BK)*

LUMIEN PRO

Wattage/VA:	3/4.83	Lumens:	30K: 141
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	Yes		



Macro Module

Antique 

Z4B1-10W-27K-A

Wattage/VA:	10/10.77	Lumens:	780
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°, 80°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

Z4B1-10W-30K-A

Wattage/VA:	10/10.77	Lumens:	800
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°, 80°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

Z0B1-10W-BLUE-A*

LUMIEN PRO

Wattage/VA:	10/13.55	Lumens:	207
Temperature:	/	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°, 80°	Dimmable:	With PRO Remote
RGB:	BLUE		

Z7B1-10W-A*

LUMIEN PRO

Wattage/VA:	10/14.01	Lumens:	690 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°, 80°	Dimmable:	With PRO Remote
RGB:	No		

Z9B1-10W-A*

LUMIEN PRO

Wattage/VA:	10/14.21	Lumens:	562 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°, 80°	Dimmable:	With PRO Remote
RGB:	Yes		

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.



Nano

01B



Nano

Area/Path	3
Directional	5
Flood	7
Pendant/Ceiling	8
Recessed/Step/Wall	10



N4B1/N7B1/N8B1



N4B2



N4B3/N7B3/N8B3

Nano

Area/Path

SHROUDS



BQCN-SHR-118-(A/BK)
Brass - Antique/Black, 60° Uplight Shroud (LAB-118)



BQCN-SHR-146-(A/BK)
Brass - Antique/Black, Downlight Shroud (LAB-146)



BQCN-SHR-198-A
Brass - Antique, Full Snoot Shroud (LAB-198)



BQCN-SHR-119-(A/BK)
Brass - Antique/Black, Flood Shroud (LAB-119)



BQCN-SHR-116-A
Brass - Antique, 5” Extra-Long Perforated Shroud (LAB-116)



BQCN-SHR-117-A
Brass - Antique, 5” Twilight Shroud (LAB-117)



GQCN-ROD-6-003-F
Glass, 6” Frosted Rod (LAG-003)



GQCN-ROD-6-004-C
Glass, 6” Clear Champagne Bubble Rod (LAG-004)



BQCN-SHR-115-A
Brass - Antique, Short Solid Shroud (LAB-115)



BQCN-SHR-120-A
Brass - Antique, Glass Shroud with Brass Attachment (LAB-120)




BQCN-CAP-122-A
Brass - Antique, (2) 90° Openings Bollard Cap (LAB-122)



BQCN-CAP-123-A
Brass - Antique, (1) 90° Opening Bollard Cap (LAB-123)



BQCN-CAP-124-A
Brass - Antique, 360° Louvered Bollard Cap (LAB-124)

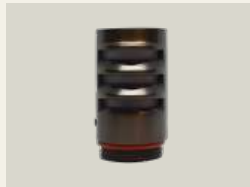

BQCN-CAP-125-A
Brass - Antique, 180° Louvered Bollard Cap (LAB-125)



BQCN-CAP-126-A
Brass - Antique, 360° Frosted with Brass Top Bollard Cap (LAB-126)

ACCESSORIES



BQCN-CAP-150-A
Brass - Antique, 360° Frosted Bollard Cap (LAB-150)



BQCN-CAP-166-A
Brass - Antique, End Cap for Glass Rod (LAB-166)



BQCN-CAP-160-A
Brass - Antique, Threaded Flat Closure for Shroud (LAB-160)



AQCN-HEX-127
Aluminum - Black, Banded Hex Louver (LAB-127)

Nano

Area/Path

SECONDARY MOUNTS



BQCU-MNT-083-A
Brass - Antique, 27mm QC L-Mount (LAB-083)



BQCU-BMNT-101-A
Brass - Antique/Black, 43mm QC Bollard L-Mount (LAB-101)



BQCU-MNT-084-A
Brass - Antique, 27mm QC T-Mount (LAB-084)



BQCU-BMNT-102-A
Brass - Antique, 43mm QC Bollard T-Mount (LAB-102)



BQCU-STM-4-078-A
Brass - Antique, 4” 27mm QC Riser (LAB-078)



BQCU-STM-8-079-A
Brass - Antique, 8” 27mm QC Riser (LAB-079)



BQCU-STM-16-081-A
Brass - Antique, 16” 27mm QC Riser (LAB-081)



BQCU-STM-24-082-A
Brass - Antique, 24” 27mm QC Riser (LAB-082)



BQCU-STM-12-080-(A/BK)
Brass - Antique/Black, 12” 27mm QC Riser (LAB-080)

MOUNTS



BQCU-BSTM-4-085-A
Brass - Antique, 4” 43mm QC Bollard Riser (LAB-085)



BQCU-BSTM-14-086-(A/BK)
Brass - Antique/Black, 14” 43mm QC Bollard Riser (LAB-086)



PBQCU-STK-8-006-A
Plastic & Brass - Antique/Black, 8” Spike (LAP-006)



SSQCU-STK-6-004-(BK)
Stainless Steel - Raw/Black, 6” Mini Stake (LAS-004)

SHROUD RISER



BQCN-SHR-154-A
Brass - Antique, 12” Perforated Shroud Riser (LAB-154)

JUNCTION BOXES



BQCU-JBX-075-A
Brass - Antique, 37mm QC Junction Box (LAB-075)



BQCU-JBX-076-(A/BK)
Brass - Antique/Black, 52mm QC Junction Box (LAB-076)



BQCU-JBX-077-A
Brass - Antique, 127mm QC Junction Box (LAB-077)

Nano

Directional

SHROUDS



BQCN-SHR-118-(A/BK)
Brass - Antique/Black, 60° Uplight Shroud (LAB-118)



BQCN-SHR-146-(A/BK)
Brass - Antique/Black, Downlight Shroud (LAB-146)



BQCN-SHR-198-A
Brass - Antique, Full Snoot Shroud (LAB-198)



BQCN-SHR-119-(A/BK)
Brass - Antique/Black, Flood Shroud (LAB-119)



BQCN-SHR-115-A
Brass - Antique, Short Solid Shroud (LAB-115)

JUNCTION BOXES



BQCU-JBX-075-A
Brass - Antique, 37mm QC Junction Box (LAB-075)



BQCU-JBX-076-(A/BK)
Brass - Antique/Black, 52mm QC Junction Box (LAB-076)



BQCU-JBX-077-A
Brass - Antique, 127mm QC Junction Box (LAB-077)



BQCU-JBX-175-A
Brass - Antique, 37mm QC Junction Box (LAB-175)

MOUNTS



SSQCU-MNT-172-BZ
Stainless Steel - Bronze, Gutter Mount Bracket



PBQCU-STK-8-006-A
Plastic & Brass - Antique/Black, 8” Spike (LAP-006)



SSQCU-STK-6-004-(BK)
Stainless Steel - Raw/Black, 6” Mini Stake (LAS-004)

CANOPY MOUNTS



BQCU-MNT-208S-(A/MB)
Brass - Antique/Black, 2” Canopy Mount



BQCU-MNT-208M-(A/MB)
Brass - Antique/Black, 3.5” Canopy Mount



BQCU-MNT-208L-(A/MB)
Brass - Antique/Black, 5” Canopy Mount

Nano

Directional

SECONDARY MOUNTS



BQCU-MNT-083-A
Brass - Antique, 27mm QC L-Mount (LAB-083)



BQCU-BMNT-101-A
Brass - Antique/Black, 43mm QC Bollard L-Mount (LAB-101)



BQCU-MNT-084-A
Brass - Antique, 27mm QC T-Mount (LAB-084)



BQCU-BMNT-102-A
Brass - Antique, 43mm QC Bollard T-Mount (LAB-102)



BQCU-STM-4-078-A
Brass - Antique, 4” 27mm QC Riser (LAB-078)



BQCU-STM-8-079-A
Brass - Antique, 8” 27mm QC Riser (LAB-079)



BQCU-STM-16-081-A
Brass - Antique, 16” 27mm QC Riser (LAB-081)



BQCU-STM-24-082-A
Brass - Antique, 24” 27mm QC Riser (LAB-082)



BQCU-STM-12-080-(A/BK)
Brass - Antique/Black, 12” 27mm QC Riser (LAB-080)



BQCU-BSTM-4-085-A
Brass - Antique, 4” 43mm QC Bollard Riser (LAB-085)



BQCU-BSTM-14-086-(A/BK)
Brass - Antique/Black, 14” 43mm QC Bollard Riser (LAB-086)

ACCESSORY



AQCN-HEX-127
Aluminum - Black, Banded Hex Louver (LAB-127)

Nano

Flood

SHROUD



BQCN-SHR-119-(A/BK)
Brass - Antique/Black,
Flood Shroud
(LAB-119)

MOUNTS



PBQCU-STK-8-006-A
Plastic & Brass - Antique/
Black, 8" Spike (LAP-006)

CANOPY MOUNTS



SSQCU-STK-6-004-(BK)
Stainless Steel - Raw/
Black, 6" Mini Stake
(LAS-004)



BQCU-MNT-208S-(A/MB)
Brass - Antique/Black,
2" Canopy Mount



BQCU-MNT-208M-(A/MB)
Brass - Antique/Black,
3.5" Canopy Mount



BQCU-MNT-208L-(A/MB)
Brass - Antique/Black,
5" Canopy Mount

SECONDARY MOUNTS



BQCU-MNT-083-A
Brass - Antique,
27mm QC L-Mount
(LAB-083)



BQCU-MNT-084-A
Brass - Antique
27mm QC T-Mount
(LAB-084)



BQCU-STM-4-078-A
Brass - Antique,
4" 27mm QC Riser
(LAB-078)



BQCU-STM-8-079-A
Brass - Antique, 8"
27mm QC Riser
(LAB-079)



BQCU-STM-16-081-A
Brass - Antique, 16"
27mm QC Riser
(LAB-081)



BQCU-STM-24-082-A
Brass - Antique, 24"
27mm QC Riser
(LAB-082)



BQCU-STM-12-080-(A/BK)
Brass - Antique/Black,
12" 27mm QC Riser
(LAB-080)

Nano

Pendant/Ceiling

SHROUDS



BQCN-SHR-118-(A/BK)
Brass - Antique/Black,
60° Uplight Shroud
(LAB-118)



BQCN-SHR-146-(A/BK)
Brass - Antique/Black,
Downlight Shroud
(LAB-146)



BQCN-SHR-198-A
Brass - Antique,
Full Snoot Shroud
(LAB-198)



BQCN-SHR-115-A
Brass - Antique,
Short Solid Shroud
(LAB-115)



BQCN-SHR-120-A
Brass - Antique,
Glass Shroud with Brass
Attachment (LAB-120)



BQCN-SHR-116-A
Brass - Antique,
5" Extra-Long Perforated
Shroud (LAB-116)



BQCN-SHR-117-A
Brass - Antique,
5" Twilight Shroud
(LAB-117)



BQCN-SHR-154-A
Brass - Antique, 12"
Perforated Shroud Riser
(LAB-154)



GQCN-ROD-6-003-F
Glass, 6" Frosted Rod
(LAG-003)



GQCN-ROD-6-004-C
Glass,
6" Clear Champagne
Bubble Rod (LAG-004)

SHROUD RISER



BQCN-SHR-154-A
Brass - Antique, 12"
Perforated Shroud Riser
(LAB-154)



BQCN-CAP-126-A
Brass - Antique, 360°
Frosted with Brass Top
Bollard Cap (LAB-126)



BQCN-CAP-150-A
Brass - Antique, 360°
Frosted Bollard Cap
(LAB-150)

ACCESSORIES



BQCN-RNG-152-A
Brass - Antique, Threaded
Lens Holder Rings
(LAB-152)



BQCN-CAP-160-A
Brass - Antique,
Threaded Flat Closure for
Shroud (LAB-160)



BQCN-CAP-166-A
Brass - Antique,
End Cap for Glass Rod
(LAB-166)



GQCN-OPT-170-F
Brass - Antique, Pendant
Frosted Glass (LAB-170)



AQCN-HEX-127
Aluminum - Black,
Banded Hex Louver
(LAB-127)

Nano

Pendant/Ceiling

MOUNT



BQCU-MNT-035-(A/BK)

Brass - Antique/Black,
Hanging Mount
(LAB-035)

SECONDARY MOUNTS



SS-WIRE-001

Stainless Steel,
Hanging Wire (LAS-001)



BCAT-PEN-6-008

Brass - Antique,
6” Pendant Wire
(LCA-008)



BCAT-PEN-12-009

Brass - Antique,
12” Pendant Wire
(LCA-009)

JUNCTION BOXES



BQCU-JBX-075-A

Brass - Antique,
37mm QC Junction Box
(LAB-075)



BQCU-JBX-076-(A/BK)

Brass - Antique/Black,
52mm QC Junction Box
(LAB-076)



BQCU-JBX-077-A

Brass - Antique,
127mm QC Junction Box
(LAB-077)



BQCU-JBX-175-A

Brass - Antique,
37mm QC Junction Box
(LAB-175)

CANOPY MOUNTS



BQCU-MNT-208S-(A/MB)

Brass - Antique/Black,
2” Canopy Mount



BQCU-MNT-208M-(A/MB)

Brass - Antique/Black,
3.5” Canopy Mount



BQCU-MNT-208L-(A/MB)

Brass - Antique/Black,
5” Canopy Mount

Nano

Recessed/Step/Wall

MARKER LIGHT CAPS



BQCN-MKR-106-A

Brass - Antique,
Circular Flush
(LAB-106)



BQCN-MKR-107-A

Brass - Antique, Circular
Glare-Shield Shroud
(LAB-107)



BQCN-MKR-108-(A/BK)

Brass - Antique/Black,
Circular 180°
(LAB-108)



BQCN-MKR-109-A

Brass - Antique,
Circular 360°
(LAB-109)




BQCN-MKR-110-A

Brass - Antique,
Circular Half-Moon
(LAB-110)



BQCN-MKR-206-A

Brass - Antique,
Circular Halo (LAB-206)



BQCN-MKR-111-A

Brass - Antique, Square
Half-Moon (LAB-111)



BQCN-MKR-112-(A/BK)

Brass - Antique/Black,
Square Flush (LAB-112)



BQCN-MKR-113-A

Brass - Antique,
Square 90°(2) Side
(LAB-113)



BQCN-MKR-114-A

Brass - Antique,
Square 90°(1) Side
(LAB-114)

WELL LIGHT & OPTICAL ACCESSORIES



BQCN-WLT-189-A

Brass - Antique,
Adjustable Well Light
with PVC (LAB-189)



BQCN-WLT-191-A

Brass - Antique,
Well Light Louvered
(LAB-191)



GQCN-WLT-007-C

Brass - Antique,
Well Light Glass Insert
(LAG-007)

RECESSED MOUNTS



PVCQCN-MNT-007

Plastic, PVC Mount
(LAP-007)



SSQCN-SOF-121

Stainless Steel,
50mm Soffit Bracket for
Nano Module (LAB-121)



SSQCN-SOF-183

Stainless Steel, 25mm
Soffit Bracket for Half
Nano Module (LAB-183)



BQCN-MNT-153S-A

Brass- Antique, Recessed
Mount with Spring
Loaded Wings (LAB-153s)

Nano

Recessed/Step/Wall

RECESSED MOUNTS CONTINUED



BQCN-MNT-153-(A/BK)
Brass - Antique/Black, Recessed Mount (LAB-153)

MOUNT ACCESSORY



SSQCU-SOF-173
Stainless Steel, Soffit Bracket for BQCN-MNT-153 (LAB-173)

SHROUDS



BQCN-SHR-118-(A/BK)
Brass - Antique/Black, 60° Uplight Shroud (LAB-118)



BQCN-SHR-198-A
Brass - Antique, Full Snoot Shroud (LAB-198)



BQCN-SHR-115-A
Brass - Antique, Short Solid Shroud (LAB-115)



BQCN-SHR-120-A
Brass - Antique, Glass Shroud with Brass Attachment (LAB-120)



BQCN-SHR-116-A
Brass - Antique, 5" Extra-Long Perforated Shroud (LAB-116)



BQCN-SHR-117-A
Brass - Antique, 5" Twilight Shroud (LAB-117)



BQCN-SHR-154-A
Brass - Antique, 12" Perforated Shroud Riser (LAB-154)



GQCN-ROD-6-003-F
Glass, 6" Frosted Rod (LAG-003)



GQCN-ROD-6-004-C
Glass, 6" Clear Champagne Bubble Rod (LAG-004)

SHROUD RISER



BQCN-SHR-154-A
Brass - Antique, 12" Perforated Shroud Riser (LAB-154)

ACCESSORIES



BQCN-CAP-166-A
Brass - Antique, End Cap for Glass Rod (LAB-166)



BQCN-CAP-160-A
Brass - Antique, Threaded Flat Closure for Shroud (LAB-160)



AQCN-HEX-127
Aluminum - Black, Banded Hex Louver (LAB-127)

Nano

Recessed/Step/Wall

SURFACE MOUNTS



BQCM-MNT-034-A
Brass - Antique, Micro Surface Mount (LAB-034)



BQCN-MNT-177-A
Brass - Antique, (1) Sided Sconce Mount (LAB-177)



BQCN-MNT-179-A
Brass - Antique, (2) Sided Sconce Mount (LAB-179)

SECONDARY MOUNTS



BQCU-STM-4-078-A
Brass - Antique, 4" 27mm QC Riser (LAB-078)



BQCU-STM-8-079-A
Brass - Antique, 8" 27mm QC Riser (LAB-079)



BQCU-STM-16-081-A
Brass - Antique, 16" 27mm QC Riser (LAB-081)



BQCU-STM-24-082-A
Brass - Antique, 24" 27mm QC Riser (LAB-082)



BQCU-STM-12-080-(A/BK)
Brass - Antique/Black, 12" 27mm QC Riser (LAB-080)



BCAT-PEN-6-008
Brass - Antique, 6" Pendant Wire (LCA-008)



BCAT-PEN-12-009
Brass - Antique, 12" Pendant Wire (LCA-009)



BQCU-BSTM-4-085-A
Brass - Antique, 4" 43mm QC Bollard Riser (LAB-085)



BQCU-BSTM-14-086-(A/BK)
Brass - Antique/Black, 14" 43mm QC Bollard Riser (LAB-086)

JUNCTION BOXES



BQCU-JBX-075-A
Brass - Antique, 37mm QC Junction Box (LAB-075)



BQCU-JBX-076-(A/BK)
Brass - Antique/Black, 52mm QC Junction Box (LAB-076)



BQCU-JBX-077-A
Brass - Antique, 127mm QC Junction Box (LAB-077)



BQCU-JBX-175-A
Brass - Antique, 37mm QC Junction Box (LAB-175)



Micro

01C



QUICK CONNECT MICRO SERIES

MICRO ACCESSORIES

2026 QUICK CONNECT PRODUCT SNAPSHOT

Micro

Area/Path	3
Directional	7
Flood	9
Pendant/Ceiling	10
Recessed/Step/Wall	13



M4B1/M0B1/M7B1/M8B1

Micro

Area/Path

SHROUDS



BQCM-SHR-032G-A
Brass - Antique,
53° Uplight Shroud
(LAB-032G)



BQCM-SHR-032-A
Brass - Antique,
37° Downlight Shroud
(LAB-032)



BQCM-SHR-071-A
Brass - Antique,
28° Extra-Long Downlight
Shroud (LAB-071)



BQCM-SHR-031-(A/BK/R)
Brass - Antique/Black/
Raw, 60° Uplight Shroud
(LAB-031)




BQCM-SHR-199-A
Brass - Antique,
Full Snoot Shroud
(LAB-199)



BQCM-SHR-033-A
Brass - Antique,
Flood Shroud (LAB-033)



BQCM-SHR-072-(A/BK)
Brass - Antique/Black,
Flood Shroud with Glare
Shield (LAB-072)

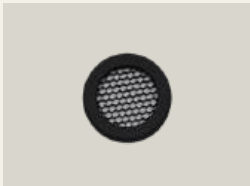

AQCM-HEX-193
Aluminum - Black,
2.8" Banded Hex Louver
(LAB-193)



SILQCM-OPT-065
Silicone, Diffuser Lens
(LAB-065)

SHROUDS



BQCM-SHR-027-(A/R)*
Brass - Antique/Raw,
0.8" Short Solid Shroud
(LAB-027)



BQCM-SHR-028-A*
Brass - Antique,
1.4" Medium Solid Shroud
(LAB-028)



BQCM-SHR-030-A*
Brass - Antique,
2.5" Long Solid Shroud
(LAB-030)



BQCM-SHR-046-A*
Brass - Antique,
5" Extra-Long Solid
Shroud (LAB-046)



BQCM-SHR-026-A*
Brass - Antique,
Glass Shroud (LAB-026)



BQCM-SHR-029-A*
Brass - Antique, 2.5" Long
Perforated Shroud
(LAB-029)



BQCM-SHR-047-A*
Brass - Antique, 5" Extra-
Long Perforated Shroud
(LAB-047)



BQCM-SHR-095-(A/BK)*
Brass - Antique/Black,
5" Twilight Shroud
(LAB-095)



AQCM-HEX-016
Aluminum - Black,
1" Banded Hex Louver
(LAB-016)



GQCM-OPT-056-C
Glass, Clear Lens
(LAB-056)

* Frosted Lens (GQCM-OPT-057-F) and Diffuser Lens (SILQCM-OPT-169) are included in the package.

Micro

Area/Path

BOLLARD CAPS



BQCM-CAP-087-(A/BK)
Brass - Antique/Black,
Bollard Cap, (2) 90°
Openings (LAB-087)



BQCM-CAP-088-(A/BK)
Brass - Antique/Black, (1)
90° Opening Bollard Cap
(LAB-088)



BQCM-CAP-089-A
Brass - Antique, (3) 100°
Louvered Bollard Cap
(LAB-089)



BQCM-CAP-090-A
Brass - Antique, (1) 100°
Louvered Bollard Cap
(LAB-090)



BQCM-CAP-103-A
Brass - Antique, 360°
Frosted with Brass Top
Bollard Cap (LAB-103)

PATH LIGHT CAPS



BQCM-CAP-104-A
Brass - Antique, 360°
Frosted Bollard Cap
(LAB-104)



BQCM-CAP-043-(A/BK)
Brass - Antique/Black,
2-Tiered Path Light Hat
(LAB-043)



BQCM-CAP-044-(A/BK)
Brass - Antique/Black,
Flat Top Dome Path Light
Hat (LAB-044)



BQCM-CAP-045-A
Brass - Antique,
Rounded Top Path Light
Hat (LAB-045)

RODS



GQCM-ROD-6-001-F
Glass, 6" Frosted Rod
(LAG-001-6)



GQCM-ROD-13-001-F
Glass, 13" Frosted Rod
(LAG-001)



GQCM-ROD-6-002-C
Glass, 6" Clear
Champagne Bubble Rod
(LAG-002-6)



GQCM-ROD-13-002-C
Glass, 13" Clear
Champagne Bubble Rod
(LAG-002)

ACCESSORIES



BQCM-CAP-161-(A/BK)
Brass - Antique/Black,
Threaded Flat Closure
(LAB-161)



BQCM-CAP-167-A
Brass - Antique,
End Cap for Glass Rod
(LAB-167)

REPLACEMENT ACCESSORIES



GQCM-OPT-057-F
Glass, Frosted Lens
(LAB-057)



SILQCM-OPT-169
Silicone, Diffuser Lens
with Cut-out (LAB-169)

IP68 RATED MICRO ACCESSORY WHEN ASSEMBLED

Micro

Area/Path

MOUNTS



PBQCU-STK-8-006-A
Plastic & Brass - Antique/Black, 8" Spike (LAP-006)



SSQCU-STK-6-004-(BK)
Stainless Steel - Raw/Black, 6" Mini Stake (LAS-004)

SECONDARY MOUNTS



BQCU-MNT-084-A
Brass - Antique, 27mm QC T-Mount (LAB-084)



BQCU-BMNT-102-A
Brass - Antique, 43mm QC Bollard T-Mount (LAB-102)



BQCU-STM-4-078-A
Brass - Antique, 4" 27mm QC Riser (LAB-078)



BQCU-STM-8-079-A
Brass - Antique, 8" 27mm QC Riser (LAB-079)



BQCU-STM-16-081-A
Brass - Antique, 16" 27mm QC Riser (LAB-081)



BQCU-STM-24-082-A
Brass - Antique, 24" 27mm QC Riser (LAB-082)



BQCU-STM-12-080-(A/BK)
Brass - Antique/Black, 12" 27mm QC Riser (LAB-080)

JUNCTION BOXES



BQCU-JBX-075-A
Brass - Antique, 37mm QC Junction Box (LAB-075)



BQCU-JBX-076-(A/BK)
Brass - Antique/Black, 52mm QC Junction Box (LAB-076)



BQCU-JBX-077-A
Brass - Antique, 127mm QC Junction Box (LAB-077)

SECONDARY MOUNTS



BQCU-MNT-083-A
Brass - Antique, 27mm QC L-Mount (LAB-083)



BQCU-BMNT-101-A
Brass - Antique/Black, 43mm QC Bollard L-Mount (LAB-101)



BQCU-BSTM-4-085-A
Brass - Antique, 4" 43mm QC Bollard Riser (LAB-085)



BQCU-BSTM-14-086-(A/BK)
Brass - Antique/Black, 14" 43mm QC Bollard Riser (LAB-086)

SECONDARY MOUNTS



BQCM-GCP-6RD-147-A
Brass - Antique, 6" Ground Cover Plate w/Single Offset Hole (LAB-147)



BQCM-GCP-6RD-055-A
Brass - Antique, 6" Ground Cover Plate (LAB-055)



QUICK CONNECT MICRO SERIES

Micro

Directional

SHROUDS



BQCM-SHR-032G-A
Brass - Antique,
53° Uplight Shroud
(LAB-032G)



BQCM-SHR-032-A
Brass - Antique,
37° Downlight Shroud
(LAB-032)



BQCM-SHR-071-A
Brass - Antique,
28° Extra-Long Downlight
Shroud (LAB-071)



BQCM-SHR-031-(A/BK/R)
Brass - Antique/Black/
Raw, 60° Uplight Shroud
(LAB-031)

OPTICAL ACCESSORIES



BQCM-SHR-199-A
Brass - Antique,
Full Snoot Shroud
(LAB-199)



BQCM-SHR-033-A
Brass - Antique,
Flood Shroud (LAB-033)



BQCM-SHR-072-(A/BK)
Brass - Antique/Black,
Flood Shroud with Glare
Shield (LAB-072)



AQCM-HEX-193
Aluminum - Black,
2.8" Banded Hex Louver
(LAB-193)



SILQCM-OPT-065
Silicone, Diffuser Lens
(LAB-065)

SHROUDS



BQCM-SHR-027-(A/R)*
Brass - Antique/Raw,
0.8" Short Solid Shroud
(LAB-027)



BQCM-SHR-028-A*
Brass - Antique,
1.4" Medium Solid Shroud
(LAB-028)



BQCM-SHR-030-A*
Brass - Antique,
2.5" Long Solid Shroud
(LAB-030)



BQCM-SHR-046-A*
Brass - Antique,
5" Extra-Long Solid
Shroud (LAB-046)

OPTICAL ACCESSORIES



AQCM-HEX-016
Aluminum - Black,
1" Banded Hex Louver
(LAB-016)



GQCM-OPT-056-C
Glass, Clear Lens
(LAB-056)



SSQCU-MNT-172-BZ
Stainless Steel - Bronze,
QC Gutter Mount Bracket
(LAB-172)



PBQCU-STK-8-006-A
Plastic & Brass - Antique/
Black, 8" Spike (LAP-006)



SSQCU-STK-6-004-(BK)
Stainless Steel - Raw/
Black, 6" Mini Stake
(LAB-004)

* Frosted Lens (GQCM-OPT-057-F) and Diffuser Lens (SILQCM-OPT-169) are included in the package.

Micro

Directional

SECONDARY MOUNTS



BQCU-MNT-083-A
Brass - Antique,
27mm QC L-Mount
(LAB-083)



BQCU-BMNT-101-A
Brass - Antique/Black,
43mm QC Bollard
L-Mount (LAB-101)



BQCU-MNT-084-A
Brass - Antique
27mm QC T-Mount
(LAB-084)



BQCU-BMNT-102-A
Brass - Antique,
43mm QC Bollard
T-Mount (LAB-102)



BQCU-STM-4-078-A
Brass - Antique,
4" 27mm QC Riser
(LAB-078)



BQCU-STM-8-079-A
Brass - Antique, 8"
27mm QC Riser
(LAB-079)



BQCU-STM-16-081-A
Brass - Antique, 16"
27mm QC Riser
(LAB-081)



BQCU-STM-24-082-A
Brass - Antique, 24"
27mm QC Riser
(LAB-082)



BQCU-STM-12-080-(A/BK)
Brass - Antique/Black,
12" 27mm QC Riser
(LAB-080)



BQCU-BSTM-4-085-A
Brass - Antique, 4"
43mm QC Bollard Riser
(LAB-085)



BQCU-BSTM-14-086-(A/BK)
Brass - Antique/Black, 14"
43mm QC Bollard Riser
(LAB-086)



BQCM-KNL-164-(A/BK)
Brass - Antique/Black, QC
Micro Knuckle (LAB-164)

JUNCTION BOXES



BQCU-JBX-075-A
Brass - Antique,
37mm QC Junction Box
(LAB-075)



BQCU-JBX-076-(A/BK)
Brass - Antique/Black,
52mm QC Junction Box
(LAB-076)



BQCU-JBX-077-A
Brass - Antique,
127mm QC Junction Box
(LAB-077)



BQCM-GCP-6RD-147-A
Brass - Antique,
6" Ground Cover Plate
w/Single Offset Hole
(LAB-147)



BQCM-GCP-6RD-055-A
Brass - Antique,
6" Ground Cover Plate
(LAB-055)

Micro

Flood

SHROUDS



BQCM-SHR-033-A
Brass - Antique,
Flood Shroud (LAB-033)



BQCM-SHR-072-(A/BK)
Brass - Antique/Black,
Flood Shroud with Glare
Shield (LAB-072)

MOUNTS



PBQCU-STK-8-006-A
Plastic & Brass - Antique/
Black, 8" Spike (LAP-006)



SSQCU-STK-6-004-(BK)
Stainless Steel - Raw/
Black, 6" Mini Stake
(LAS-004)

CANOPY MOUNTS



BQCU-MNT-208S-(A/MB)
Brass - Antique/Black,
2" Canopy Mount



BQCU-MNT-208M-(A/MB)
Brass - Antique/Black,
3.5" Canopy Mount



BQCU-MNT-208L-(A/MB)
Brass - Antique/Black,
5" Canopy Mount

SECONDARY MOUNTS



BQCM-KNL-164-(A/BK)
Brass - Antique/Black, QC
Micro Knuckle (LAB-164)



BQCM-GCP-6RD-147-A
Brass - Antique,
6" Ground Cover Plate
w/Single Offset Hole
(LAB-147)



BQCM-GCP-6RD-055-A
Brass - Antique,
6" Ground Cover Plate
(LAB-055)

Micro

Pendant/Ceiling

SHROUDS



BQCM-SHR-032G-A
Brass - Antique,
53° Uplight Shroud
(LAB-032G)



BQCM-SHR-032-A
Brass - Antique,
37° Downlight Shroud
(LAB-032)



BQCM-SHR-071-A
Brass - Antique,
28° Extra-Long Downlight
Shroud (LAB-071)



BQCM-SHR-199-A
Brass - Antique,
Full Snoot Shroud
(LAB-199)

OPTICAL ACCESSORIES



AQCM-HEX-193
Aluminum - Black,
2.8" Banded Hex Louver
(LAB-193)



SILQCM-OPT-065
Silicone, Diffuser Lens
(LAB-065)

SHROUDS



BQCM-SHR-027-(A/R)*
Brass - Antique/Raw,
0.8" Short Solid Shroud
(LAB-027)



BQCM-SHR-028-A*
Brass - Antique,
1.4" Medium Solid Shroud
(LAB-028)



BQCM-SHR-030-A*
Brass - Antique,
2.5" Long Solid Shroud
(LAB-030)



BQCM-SHR-046-A*
Brass - Antique,
5" Extra-Long Solid
Shroud (LAB-046)



BQCM-SHR-026-A*
Brass - Antique,
Glass Shroud (LAB-026)



BQCM-SHR-029-A*
Brass - Antique, 2.5" Long
Perforated Shroud
(LAB-029)



BQCM-SHR-047-A*
Brass - Antique, 5" Extra-
Long Perforated Shroud
(LAB-047)

OPTICAL ACCESSORIES



BQCM-SHR-095-(A/BK)*
Brass - Antique/Black,
5" Twilight Shroud
(LAB-095)



AQCM-HEX-016
Aluminum - Black,
1" Banded Hex Louver
(LAB-016)



GQCM-OPT-056-C
Glass, Clear Lens
(LAB-056)



GQCM-OPT-054-C
Glass, Frosted Diffused
Lens with Silicone O-Ring
(LAB-054)

* Frosted Lens (GQCM-OPT-057-F) and Diffuser Lens (SILQCM-OPT-169) are included in the package.


Micro

Pendant/Ceiling

RODS



GQCM-ROD-6-001-F
Glass, 6" Frosted Rod
(LAG-001-6)



GQCM-ROD-13-001-F
Glass, 13" Frosted Rod
(LAG-001)



GQCM-ROD-6-002-C
Glass, 6" Clear
Champagne Bubble Rod
(LAG-002-6)



GQCM-ROD-13-002-C
Glass, 13" Clear
Champagne Bubble Rod
(LAG-002)

BOLLARD CAPS



BQCM-CAP-103-A
Brass - Antique, 360°
Frosted with Brass Top
Bollard Cap (LAB-103)



BQCM-CAP-104-A
Brass - Antique, 360°
Frosted Bollard Cap
(LAB-104)

SHADE



BQCM-SHD-105-A
Brass - Antique,
Flat Top Dome Shade
(LAB-105)

ACCESSORIES



BQCM-CAP-161-(A/BK)
Brass - Antique/Black,
Threaded Flat Closure
(LAB-161)



BQCM-CAP-167-A
Brass - Antique,
End Cap for Glass Rod
(LAB-167)



BQCM-RNG-157-A
Brass - Antique,
Threaded Lens Holder
Ring (LAB-157)

REPLACEMENT ACCESSORIES



GQCM-OPT-057-F
Glass, Frosted Lens
(LAB-057)



SILQCM-OPT-169
Silicone, Diffuser Lens
with Cut-out (LAB-169)

Micro

Pendant/Ceiling

MOUNT



BQCU-MNT-035-(A/BK)
Brass - Antique/Black,
Hanging Mount
(LAB-035)

CANOPY MOUNTS



BQCU-MNT-208S-(A/MB)
Brass - Antique/Black,
2" Canopy Mount



BQCU-MNT-208M-(A/MB)
Brass - Antique/Black,
3.5" Canopy Mount



BQCU-MNT-208L-(A/MB)
Brass - Antique/Black,
5" Canopy Mount

SECONDARY MOUNTS



SS-WIRE-001
Stainless Steel,
Hanging Wire (LAS-001)



BCAT-PEN-6-008
Brass - Antique,
6" Pendant Wire
(LCA-008)



BCAT-PEN-12-009
Brass - Antique,
12" Pendant Wire
(LCA-009)

JUNCTION BOXES



BQCU-JBX-075-A
Brass - Antique,
37mm QC Junction Box
(LAB-075)



BQCU-JBX-076-(A/BK)
Brass - Antique/Black,
52mm QC Junction Box
(LAB-076)



BQCU-JBX-077-A
Brass - Antique,
127mm QC Junction Box
(LAB-077)



BQCU-JBX-175-A
Brass - Antique,
37mm QC Junction Box
(LAB-175)

Micro

Recessed/Step/Wall

MARKER LIGHT CAPS



BQCM-MKR-019-(A/BK)*

Brass - Antique/Black, Square (1) Side Light (LAB-019)



BQCM-MKR-021-A*

Brass - Antique, Square (2) Side Light (LAB-021)



BQCM-MKR-093-A*

Brass - Antique, Square 90° (2) Side Light (LAB-093)



BQCM-MKR-094-A*

Brass - Antique, Square (3) Side Light (LAB-094)



BQCM-MKR-020-A*

Brass - Antique, Square (4) Side Light (LAB-020)



BQCM-MKR-022-(A/BK)*

Brass - Antique/Black, Square Half-Moon (LAB-022)



BQCM-MKR-023-(A/BK)*

Brass - Antique/Black, Square Flush (LAB-023)



BQCM-MKR-024-(A/BK)*

Brass - Antique/Black, Circular Flush (LAB-024)



BQCM-MKR-025-(A/BK)*

Brass - Antique/Black, Circular Half-Moon (LAB-025)



BQCM-MKR-059-(A/BK)*

Brass - Antique/Black, Circular Glare-Shield Shroud (LAB-059)



BQCM-MKR-099-(A/BK)*

Brass - Antique/Black, Circular 180° (LAB-099)



BQCM-MKR-100-A*

Brass - Antique, Circular 360° (LAB-100)



BQCM-MKR-205-A*

Brass - Antique, Circular Halo (LAB-205)

REPLACEMENT ACCESSORIES



GQCM-OPT-057-F

Glass, Frosted Lens (LAB-057)



SILQCM-OPT-169

Silicone, Diffuser Lens with Cut-out (LAB-169)

* Frosted Lens (GQCM-OPT-057-F) and Diffuser Lens (SILQCM-OPT-169) are included in the package.

Micro

Recessed/Step/Wall

WELL LIGHT & OPTICAL ACCESSORY




BQCM-WLT-156-A

Brass - Antique, Micro Well Light (LAB-156)



BQCMZ-WLT-144-A

Brass - Antique, Hex Insert (LAB-144)



BQCMZ-WLT-165-A

Brass - Antique, Louvered Insert (LAB-165)



GQCMZ-WLT-006-C

Brass - Antique, Glass Insert (LAG-006)

SHROUDS



BQCM-SHR-027-(A/R)*

Brass - Antique/Raw, 0.8" Short Solid Shroud (LAB-027)



BQCM-SHR-026-A*

Brass - Antique, Glass Shroud (LAB-026)



BQCM-SHR-028-A*

Brass - Antique, 1.4" Medium Solid Shroud (LAB-028)



BQCM-SHR-030-A*

Brass - Antique, 2.5" Long Solid Shroud (LAB-030)



BQCM-SHR-046-A*

Brass - Antique, 5" Extra-Long Solid Shroud (LAB-046)



BQCM-SHR-029-A*

Brass - Antique, 2.5" Long Perforated Shroud (LAB-029)



BQCM-SHR-047-A*


Brass - Antique, 5" Extra-Long Perforated Shroud (LAB-047)



BQCM-SHR-095-(A/BK)*

Brass - Antique/Black, 5" Twilight Shroud (LAB-095)

OPTICAL ACCESSORIES



AQCM-HEX-016

Aluminum - Black, 1" Banded Hex Louver (LAB-016)




GQCM-OPT-056-C

Glass, Clear Lens (LAB-056)



GQCM-OPT-054-C

Glass, Frosted Diffused Lens with Silicone O-Ring (LAB-054)



PQCM-OPT-ASYM-015

Plastic, Asymmetrical Optic Lens (LAP-015)

Micro

Recessed/Step/Wall

SHROUD



BQCM-SHR-199-A

Brass - Antique,
Full Snoot Shroud
(LAB-199)



BQCM-SHR-031-(A/BK/R)

Brass - Antique/Black/
Raw, 60° Uplight Shroud
(LAB-031)

RODS



GQCM-ROD-6-001-F

Glass, 6" Frosted Rod
(LAG-001-6)



GQCM-ROD-13-001-F

Glass, 13" Frosted Rod
(LAG-001)



GQCM-ROD-6-002-C

Glass, 6" Clear
Champagne Bubble Rod
(LAG-002-6)



GQCM-ROD-13-002-C

Glass, 13" Clear
Champagne Bubble Rod
(LAG-002)

BOLLARD CAPS



BQCM-CAP-103-A

Brass - Antique, 360°
Frosted with Brass Top
Bollard Cap (LAB-103)



BQCM-CAP-104-A

Brass - Antique, 360°
Frosted Bollard Cap
(LAB-104)



**BQCU-MNT
-208S-(A/MB)**

Brass - Antique/Black,
2" Canopy Mount



**BQCU-MNT
-208M-(A/MB)**

Brass - Antique/Black,
3.5" Canopy Mount



**BQCU-MNT
-208L-(A/MB)**

Brass - Antique/Black,
5" Canopy Mount

RECESSED MOUNTS



PVCQCM-MNT-008

Plastic, PVC (LAP-008)



SSQCM-SOF-017

Stainless Steel,
Soffit Bracket (LAB-017)



RUBQCM-MNT-195

Silicone, Rubber Sleeve
for Coredrill Applications
(LAB-195)



**BQCM-GCP-
6RD-147-A**

Brass - Antique,
6" Ground Cover Plate
w/Single Offset Hole
(LAB-147)



**BQCM-GCP-
6RD-055-A**

Brass - Antique,
6" Ground Cover Plate
(LAB-055)

OPTICAL ACCESSORIES



AQCM-HEX-193

Aluminum - Black,
2.8" Banded Hex Louver
(LAB-193)



SILQCM-OPT-065

Silicone, Diffuser Lens
(LAB-065)

Micro

Recessed/Step/Wall

SURFACE MOUNT



BQCM-MNT-034-A

Brass - Antique,
Micro Surface Mount
(LAB-034)



BQCM-MNT-176-A

Brass - Antique, (1)
Sided Sconce Mount
(LAB-176)



BQCM-MNT-178-A

Brass - Antique, (2)
Sided Sconce Mount
(LAB-178)

SECONDARY MOUNTS



BQCU-STM-4-078-A

Brass - Antique,
4" 27mm QC Riser
(LAB-078)



BQCU-STM-8-079-A

Brass - Antique, 8"
27mm QC Riser
(LAB-079)



BQCU-STM-16-081-A

Brass - Antique, 16"
27mm QC Riser
(LAB-081)



BQCU-STM-24-082-A

Brass - Antique, 24"
27mm QC Riser
(LAB-082)



**BQCU-STM-12
-080-(A/BK)**

Brass - Antique/Black,
12" 27mm QC Riser
(LAB-080)



BQCU-BSTM-4-085-A

Brass - Antique, 4"
43mm QC Bollard Riser
(LAB-085)



**BQCU-BSTM-14
-086-(A/BK)**

Brass - Antique/Black, 14"
43mm QC Bollard Riser
(LAB-086)



BCAT-PEN-6-008

Brass - Antique,
6" Pendant Wire
(LCA-008)



BCAT-PEN-12-009

Brass - Antique,
12" Pendant Wire
(LCA-009)

JUNCTION BOXES



BQCU-JBX-075-A

Brass - Antique,
37mm QC Junction Box
(LAB-075)



BQCU-JBX-076-(A/BK)

Brass - Antique/Black,
52mm QC Junction Box
(LAB-076)



BQCU-JBX-077-A

Brass - Antique,
127mm QC Junction Box
(LAB-077)



BQCU-JBX-175-A

Brass - Antique,
37mm QC Junction Box
(LAB-175)



THE ALAMO (SAN ANTONIO, TX)

TEXAS OUTDOOR LIGHTING

Macro

01D



Macro

Area/Path/Directional	3
Flood	5
Pendant/Ceiling	6
Recessed/Step/Wall	8



Z4B1/Z0B1/Z7B1/Z9B1

Macro

Area/Path/Directional

SHROUD



BQCZ-SHR-184-A

Brass - Antique, Uplight Shroud (LAB-184)



BQCZ-SHR-200-A

Brass - Antique, Full Snoot Shroud (LAB-200)



BQCZ-SHR-185-A

Brass - Antique, Flood Shroud w/Glare Shield (LAB-185)



BQCZ-SHR-139-A

Brass - Antique, 6" Extra-Long Perforated Shroud (LAB-139)



BQCZ-SHR-140-A

Brass - Antique, 6" Twilight Shroud (LAB-140)

SHROUD



BQCZ-SHR-142-A

Brass - Antique, Glass Shroud (LAB-142)



BQCZ-SHR-143-A

Brass - Antique, Short Solid Shroud (LAB-143)

ACCESSORY



BQCZ-CAP-162-A

Brass - Antique, Threaded Flat Closure (LAB-162)



AQCZ-HEX-145

Aluminum - Black, Banded Hex Louver (LAB-145)

MOUNTS



SSQCU-MNT-172-BZ

Stainless Steel - Bronze, QC Gutter Mount Bracket (LAB-172)



PBQCU-STK-8-006-A

Plastic & Brass - Antique/Black, 8" Spike (LAP-006)



SSQCU-STK-6-004-(BK)

Stainless Steel - Raw/Black, 6" Mini Stake (LAS-004)

SECONDARY MOUNTS



BQCU-MNT-083-A

Brass - Antique, 27mm QC L-Mount (LAB-083)



BQCU-BMNT-101-A

Brass - Antique/Black, 43mm QC Bollard L-Mount (LAB-101)



BQCU-MNT-084-A

Brass - Antique, 27mm QC T-Mount (LAB-084)



BQCU-BMNT-102-A

Brass - Antique, 43mm QC Bollard T-Mount (LAB-102)



BQCZ-GCP-10RD-138-A

Brass - Antique, 10" Single Hole Ground Cover Plate (LAB-138)

Macro

Area/Path/Directional

SECONDARY MOUNTS



BQCU-STM-4-078-A

Brass - Antique, 4" 27mm QC Riser (LAB-078)



BQCU-STM-8-079-A

Brass - Antique, 8" 27mm QC Riser (LAB-079)



BQCU-STM-16-081-A

Brass - Antique, 16" 27mm QC Riser (LAB-081)



BQCU-STM-24-082-A

Brass - Antique, 24" 27mm QC Riser (LAB-082)



BQCU-STM-12-080-(A/BK)

Brass - Antique/Black, 12" 27mm QC Riser (LAB-080)



BQCU-BSTM-4-085-A

Brass - Antique, 4" 43mm QC Bollard Riser (LAB-085)



BQCU-BSTM-14-086-(A/BK)

Brass - Antique/Black, 14" 43mm QC Bollard Riser (LAB-086)

JUNCTION BOXES



BQCU-JBX-075-A

Brass - Antique, 37mm QC Junction Box (LAB-075)



BQCU-JBX-076-(A/BK)

Brass - Antique/Black, 52mm QC Junction Box (LAB-076)



BQCU-JBX-077-A

Brass - Antique, 127mm QC Junction Box (LAB-077)

CANOPY MOUNTS



BQCU-MNT-208S-(A/MB)

Brass - Antique/Black, 2" Canopy Mount



BQCU-MNT-208M-(A/MB)

Brass - Antique/Black, 3.5" Canopy Mount



BQCU-MNT-208L-(A/MB)

Brass - Antique/Black, 5" Canopy Mount

Macro

Flood

SHROUDS



BQCZ-SHR-185-A

Brass - Antique, Flood Shroud w/Glare Shield (LAB-185)

MOUNTS



PBQCU-STK-8-006-A

Plastic & Brass - Antique/Black, 8" Spike (LAP-006)



SSQCU-STK-6-004-(BK)

Stainless Steel - Raw/Black, 6" Mini Stake (LAS-004)

SECONDARY MOUNT



BQCZ-GCP-10RD-138-A

Brass - Antique, 10" Single Hole Ground Cover Plate (LAB-138)

CANOPY MOUNTS



BQCU-MNT-208S-(A/MB)

Brass - Antique/Black, 2" Canopy Mount



BQCU-MNT-208M-(A/MB)

Brass - Antique/Black, 3.5" Canopy Mount



BQCU-MNT-208L-(A/MB)

Brass - Antique/Black, 5" Canopy Mount

Macro

Pendant/Ceiling

SHROUDS



BQCZ-SHR-184-A

Brass - Antique, Uplight Shroud (LAB-184)



BQCZ-SHR-200-A

Brass - Antique, Full Snoot Shroud (LAB-200)



BQCZ-SHR-139-A

Brass - Antique, 6" Extra-Long Perforated Shroud (LAB-139)



BQCZ-SHR-140-A

Brass - Antique, 6" Twilight Shroud (LAB-140)



BQCZ-SHR-142-A

Brass - Antique, Glass Shroud (LAB-142)

MOUNT



BQCU-MNT-035-(A/BK)

Brass - Antique/Black, Hanging Mount (LAB-035)

SECONDARY MOUNTS



SS-WIRE-001

Stainless Steel, Hanging Wire (LAS-001)



BCAT-PEN-6-008

Brass - Antique, 6" Pendant Wire (LCA-008)



BCAT-PEN-12-009

Brass - Antique, 12" Pendant Wire (LCA-009)

JUNCTION BOXES



BQCU-JBX-075-A

Brass - Antique, 37mm QC Junction Box (LAB-075)



BQCU-JBX-076-(A/BK)

Brass - Antique/Black, 52mm QC Junction Box (LAB-076)



BQCU-JBX-077-A

Brass - Antique, 127mm QC Junction Box (LAB-077)



BQCU-JBX-175-A

Brass - Antique, 37mm QC Junction Box (LAB-175)

ACCESSORIES



GQCZ-OPT-171-F

Glass, Frosted Glass (LAB-171)



BQCZ-RNG-159-A

Brass - Antique, Threaded Lens Holder Rings (LAB-159)



BQCZ-CAP-162-A

Brass - Antique, Threaded Flat Closure (LAB-162)



AQCZ-HEX-145

Aluminum - Black, Banded Hex Louver (LAB-145)

Macro

Recessed/Step/Wall

MARKER LIGHT CAPS



BQCZ-MKR-128-A

Brass - Antique, Circular Flush (LAB-128)



BQCZ-MKR-129-A

Brass - Antique, Circular Glare-Shield Shroud (LAB-129)



BQCZ-MKR-130-A

Brass - Antique, Circular Half-Moon (LAB-130)



BQCZ-MKR-131-A

Brass - Antique, Circular 180° (LAB-131)



BQCZ-MKR-132-A

Brass - Antique, Circular 360° (LAB-132)



BQCZ-MKR-133-A

Brass - Antique, Square Half-Moon (LAB-133)



BQCZ-MKR-134-A

Brass - Antique, Square Flush (LAB-134)



BQCZ-MKR-135-A

Brass - Antique, Square 90° (2) Side Light (LAB-135)



BQCZ-MKR-136-A

Brass - Antique, Square (1) Side Light (LAB-136)



BQCZ-MKR-137-A

Brass - Antique, Square (3) Side Light (LAB-137)

WELL LIGHT & OPTICAL ACCESSORY




BQCZ-WLT-158-A

Brass - Antique, Macro Well Light (LAB-158)



BQCMZ-WLT-144-A

Brass - Antique, Hex Insert (LAB-144)



BQCMZ-WLT-165-A

Brass - Antique, Louvered Insert (LAB-165)



GQCMZ-WLT-006-C

Brass - Antique, Glass Insert (LAG-006)

RECESSED MOUNT



PVCQCZ-MNT-009

Plastic, PVC (LAP-009)

SECONDARY MOUNT



BQCZ-GCP-10RD-138-A

Brass - Antique, 10" Single Hole Ground Cover Plate (LAB-138)

JUNCTION BOXES



BQCU-JBX-075-A

Brass - Antique, 37mm QC Junction Box (LAB-075)



BQCU-JBX-076-(A/BK)

Brass - Antique/Black, 52mm QC Junction Box (LAB-076)



BQCU-JBX-077-A

Brass - Antique, 127mm QC Junction Box (LAB-077)

Macro

Recessed/Step/Wall

SHROUDS



BQCZ-SHR-184-A

Brass - Antique, Uplight Shroud (LAB-184)



BQCZ-SHR-200-A

Brass - Antique, Full Snoot Shroud (LAB-200)



BQCZ-SHR-143-A

Brass - Antique, Short Solid Shroud (LAB-143)



BQCZ-SHR-139-A

Brass - Antique, 6" Extra-Long Perforated Shroud (LAB-139)



BQCZ-SHR-140-A

Brass - Antique, 6" Twilight Shroud (LAB-140)

SHROUDS



BQCZ-SHR-142-A

Brass - Antique, Glass Shroud (LAB-142)

CANOPY MOUNTS



BQCU-MNT-208S-(A/MB)

Brass - Antique/Black, 2" Canopy Mount



BQCU-MNT-208M-(A/MB)

Brass - Antique/Black, 3.5" Canopy Mount



BQCU-MNT-208L-(A/MB)

Brass - Antique/Black, 5" Canopy Mount



BQCU-STM-4-078-A

Brass - Antique, 4" 27mm QC Riser (LAB-078)



BQCU-STM-8-079-A

Brass - Antique, 8" 27mm QC Riser (LAB-079)



BQCU-STM-16-081-A

Brass - Antique, 16" 27mm QC Riser (LAB-081)



BQCU-STM-24-082-A

Brass - Antique, 24" 27mm QC Riser (LAB-082)



BQCU-STM-12-080-(A/BK)

Brass - Antique/Black, 12" 27mm QC Riser (LAB-080)



BQCU-BSTM-4-085-A

Brass - Antique, 4" 43mm QC Bollard Riser (LAB-085)

ACCESSORIES



BQCZ-CAP-162-A

Brass - Antique, Threaded Flat Closure (LAB-162)



AQCZ-HEX-145

Aluminum - Black, Banded Hex Louver (LAB-145)



BQCU-BSTM-14-086-(A/BK)

Brass - Antique/Black, 14" 43mm QC Bollard Riser (LAB-086)



BCAT-PEN-6-008

Brass - Antique, 6" Pendant Wire (LCA-008)



BCAT-PEN-12-009

Brass - Antique, 12" Pendant Wire (LCA-009)

Adapters

Path Light



PATH LIGHT ADAPTER



BQCNM-ADP-155-A

Brass - Antique,
Nano Module to Micro Path
Light Caps (LAB-155)

COMPATIBLE MODULES



Full Nano

N4B1-1.5W-27K-15-A
N4B1-1.5W-27K-30-A
N4B1-1.5W-30K-15-A
N4B1-1.5W-30K-30-A
N4B1-2.5W-27K-15-A
N4B1-2.5W-27K-30-A
N4B1-2.5W-30K-15-A
N4B1-2.5W-30K-30-A
N7B1-2.5W-30-(A/BK)*
N8B1-2.5W-27K-30-(A/BK)*
N8B1-2.5W-30K-30-(A/BK)*



Half Nano

N4B2-2W-27K-30-A
N4B2-2W-30K-30-A

COMPATIBLE PATH LIGHT CAPS



**BQCM-CAP
-043-(A/BK)**

Brass - Antique/Black,
2-Tiered Path Light Hat
(LAB-043)



**BQCM-CAP
-044-(A/BK)**

Brass - Antique/Black,
Flat Top Dome Path Light
Hat (LAB-044)



**BQCM-CAP
-045-A**

Brass - Antique,
Rounded Top Path Light
Hat (LAB-045)

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

Adapters

Path Light



PATH LIGHT ADAPTER



BSDQC-ADP-163-(A/BK)

Brass - Antique, Path Light
Adapter , QC Bollard to
Deco Brass Series
Path Light Module

COMPATIBLE MODULES



**Deco Brass Series
Path Light Module**

REPL-003-4W-27K-A
REPL-003-4W-30K-A
REPL-003-8W-27K-A
REPL-003-8W-30K-A
REPL-003-7W-RGBTW-(A/BK)*
REPL-003-7W-TW-A*

COMPATIBLE RISER MOUNTS



BQCU-BSTM-4-085-A

Brass - Antique, 4"
43mm QC Bollard Riser
(LAB-085)



**BQCU-BSTM-14
-086-(A/BK)**

Brass - Antique/Black, 14"
43mm QC Bollard Riser
(LAB-086)

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

Adapters

Mount

MOUNT ADAPTER



BSDQCU-ADP-018-(A/BK)

Brass - Antique/Black, Mount Adapter, Quick Connect to 1/2" Threaded Mounting Accessories (LAB-018)

COMPATIBLE MOUNTS



BSD-MNT-001-A

Brass - Antique, 1/2" Threaded Single Point Tree Mount (LAB-001)



BSD-MNT-002-A

Brass - Antique, 1/2" Threaded Tree Mount Bracket (LAB-002)



PSD-STK-12-001

Plastic, 1/2" Threaded 12" Spike (LAP-001)



PSD-STK-8-002

Plastic, 1/2" Threaded 8" Spike (LAP-002)



BSD-STK-SUB-188-A

Brass - Antique, 1-12" Sub-Grade Adjustable Riser (LAB-188)



PSD-STK-8-018

Plastic, 1/2" Threaded 8" Spike with Adjustable Collar (LAP-018)



SSSD-STK-12-002

Stainless Steel, 1/2" Threaded 12" Trident Stake (LAS-002-12)



SSSD-STK-6-002

Stainless Steel, 1/2" Threaded 6" Trident Stake (LAS-002-6)



SSSD-STK-6-007

Stainless Steel, 1/2" Threaded 3" Plate with 6" Trident Stake



SSSD-MNT-005-BK

Stainless Steel - Black, Tree Mount, 1.5" X 4" (LAS-005)



SSSD-MNT-005XL-BK

Stainless Steel - Black, Tree Mount, 2.5" X 6" (LAS-005-XL)



EATONTON , GA

GRIMES LANDSCAPE COMPANY



QUICK CONNECT CATENARY SERIES

IP68 RATED QUICK CONNECT CATENARY SYSTEM WHEN ASSEMBLED

Catenary

MOUNT



BCAT-HUB-001-A
Brass - Antique, Hub with Locking Mechanism (LCA-001)

SECONDARY MOUNTS



BCAT-PEN-6-008
Brass - Antique, 6" Pendant Wire (LCA-008)



BCAT-PEN-12-009
Brass - Antique, 12" Pendant Wire (LCA-009)

POWER



BCAT-EXT-1-002
Brass - Antique, 1' Power Extension (LCA-002)



BCAT-EXT-2-003
Brass - Antique, 2' Power Extension (LCA-003)



BCAT-EXT-5-004
Brass - Antique, 5' Power Extension (LCA-004)



BCAT-JPR-15-006
Brass - Antique, 15' Jumper (LCA-006)



BCAT-PFD-30-005
Brass - Antique, 30' Main Power Feed (LCA-005)

ACCESSORY



BCAT-CAP-007-A
Brass - Antique, End Cap (LCA-007)

IP65 RATED QUICK CONNECT VIBE SERIES WHEN ASSEMBLED

LumienVIBE



LumienVIBE Audio

Antique 

Brass - Antique, 40W 12V Audio Speaker

LV-40W-A

Wattage/VA: 40/15 Voltage: 10-15V



LumienVIBE Speaker Hub

Plastic - Black, LumienVIBE Speaker Hub with 100’ Signal Extension

LV-HUB

Wattage/VA: 2.5/3.85 Voltage: 10-15V





PARK SHORE PARADE

BEACON OUTDOOR LIGHTING

BRASS

Area/Path

02A



G4 Drop-In Antique

Brass - Antique, Drop In Series 18” Riser Path Light with Standard Cap. Drop In. 6’ Lead Wire. 8” Spike with Adjustable Collar Included. (Lamp Not Included)

A1B1-A			
Voltage:	10-15V	Mounting:	PSD-STK-8-018



Deco ADJ Beam Antique Black

Brass - Antique/Black. Deco Series 18” Riser Path Light with Module/ADJ Beam Spread. Integrated Modular Variable. Use the rotating shroud to adjust beam spread from 2-7ft from center. 6’ Lead Wire. 8” Spike with Adjustable Collar Included. (Hats Order Separately)

A6B1-4W-27K-A			
Wattage/VA:	4/5.58	Lumens:	192
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	50-110°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV)

A6B1-4W-30K-A			
Wattage/VA:	4/5.58	Lumens:	218
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	50-110°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV)

A6B1-8W-27K-A			
Wattage/VA:	8/11.9	Lumens:	362
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	50-110°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV)

A6B1-8W-30K-A			
Wattage/VA:	8/11.9	Lumens:	375
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	50-110°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV)

A7B1-7W-A*		LUMIEN PRO	
Wattage/VA:	7/10.08	Lumens:	287 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	50-110°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	With PRO Remote

A9B1-7W-(A/BK)*		LUMIEN PRO	
Wattage/VA:	7/10.1	Lumens:	222 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	50-110°	Mounting:	PSD-STK-8-018
RGB:	Yes	Dimmable:	With PRO Remote

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

Hat Accessory Antique Black

BDCO-CAP -038-A **BDCO-CAP -039-A** **BDCO-CAP -040-(A/BK)** **BDCO-CAP -041-A**



BDCO-CAP -042-(A/BK) +



Replacement Module

Deco Series Path Light Module/Shroud. Fixture is comprised of stem and removable module for easy replacement.

REPL-003 (LAB-003)
REPL-003-4W-27K-A
REPL-003-4W-30K-A
REPL-003-8W-27K-A
REPL-003-8W-30K-A
REPL-003-7W-RGBTW-A*
REPL-003-7W-RGBTW-BK*
REPL-003-7W-TW-A*



THE ALAMO (SAN ANTONIO, TX)

TEXAS OUTDOOR LIGHTING

Directional

02B



GREENWICH , CT

GRAEF LIGHTING



Drop-In MR16 Uplight

Antique Black

Brass - Antique/Black, Drop In Series MR16 Uplight. 10’ Lead Wire. 8” Spike with Adjustable Collar Included. (Lamp Not Included. Order Separately.)

D1B1-(A/MB)

Voltage: 10-15V Mounting: PSD-STK-8-018



LEDMR16-HEX
Aluminum - Black,
MR16 Hex Louver

MR16 Lamps

LED-PRO-5.5W-MR16-ALL-8-TW*

LUMIEN PRO

Wattage/VA:	5.5/8.6	Lumens:	450
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	20°, 40°, 60°, 100°	Dimmable:	With PRO Remote
RGB:	No	CRI:	80+

LED-PRO-3.5W-MR16-40-8-RGBTW*

LUMIEN PRO

Wattage/VA:	3.5/5.6	Lumens:	27K: 135
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	Yes	CRI:	80+



Drop-In MR16 Downlight

Antique Black

Brass - Antique/Black, Drop In Series MR16 Downlight. 30’ Lead Wire. D1B2 Includes A Single Point Mount. D1B3 Includes A Tree Mount. (Lamp Not Included. Order Separately.)

D1B2-(A/MB)

Voltage: 10-15V Mounting: BSD-MNT-001-A

D1B3-(A/MB)

Voltage: 10-15V Mounting: BSD-MNT-002-A

LED-PRO-5.5W-MR16-08-927*

LUMIEN PRO

Wattage/VA:	5.5/7.8	Lumens:	270
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	8°	Dimmable:	With PRO Remote
RGB:	No	CRI:	90+

LED-PRO-5.5W-MR16-08-930*

LUMIEN PRO

Wattage/VA:	5.5/7.8	Lumens:	315
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	8°	Dimmable:	With PRO Remote
RGB:	No	CRI:	90+

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

BRASS



Deco Uplight

Antique  Black 

Brass - Antique/Black, Deco Series Uplight. Integrated Modular Variable. Offers adjustability through interchangeable optic lenses. Additional Optical Accessories Available. 6’ Lead Wire. 8” Spike with Adjustable Collar Included.

D6B1-5W-27K-A

Wattage/VA:	5/5.71	Lumens:	380
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV/ELV)

D6B1-5W-30K-A

Wattage/VA:	5/5.71	Lumens:	365
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV/ELV)

D6B1-10W-27K-A

Wattage/VA:	10/12.02	Lumens:	704
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV/ELV)

D6B1-10W-30K-A

Wattage/VA:	10/12.02	Lumens:	683
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV/ELV)

D7B1-10W-A*

Wattage/VA:	10/14.31	Lumens:	602 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	With PRO Remote

LUMIEN PRO

D9B1-10W-A*

Wattage/VA:	10/13.86	Lumens:	482 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°	Mounting:	PSD-STK-8-018
RGB:	Yes	Dimmable:	With PRO Remote

LUMIEN PRO



* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.



Deco Downlight

Antique 

Brass - Antique/Black, Deco Series Downlight. Integrated Modular Variable. Offers adjustability through interchangeable optic lenses. Additional Optical Accessories Available. 30’ Lead Wire.

D6B2-5W-27K-A

Wattage/VA:	5/5.71	Lumens:	375
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°	Mounting:	Not Included
RGB:	No	Dimmable:	Primary (MLV/ELV)

D6B2-5W-30K-A

Wattage/VA:	5/5.71	Lumens:	375
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°	Mounting:	Not Included
RGB:	No	Dimmable:	Primary (MLV/ELV)

D6B2-10W-27K-A

Wattage/VA:	10/12.02	Lumens:	700
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°	Mounting:	Not Included
RGB:	No	Dimmable:	Primary (MLV/ELV)

D6B2-10W-30K-A

Wattage/VA:	10/12.02	Lumens:	700
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°	Mounting:	Not Included
RGB:	No	Dimmable:	Primary (MLV/ELV)

D7B2-10W-A*

Wattage/VA:	10/14.31	Lumens:	464 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°	Mounting:	Not Included
RGB:	No	Dimmable:	With PRO Remote

LUMIEN PRO

D9B2-10W-A*

Wattage/VA:	10/13.86	Lumens:	373 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	15°, 40°, 60°	Mounting:	Not Included
RGB:	Yes	Dimmable:	With PRO Remote

LUMIEN PRO

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

Replacement Module

Deco Series Replacement Module Options (Including uplight, downlight and floodlight applications).



REPL-036 (LAB-036)
REPL-036-5W-27K
REPL-036-5W-30K
REPL-036-10W-27K
REPL-036-10W-30K
REPL-036-10W-RGBTW*
REPL-036-10W-TW*



Mega Antique

Brass - Antique, 23W Mega Brass Series Uplight Integrated Modular Variable. Additional 20° Lens Option Available. 6’ Lead Wire. 8” Spike with Adjustable Collar Included.

DOB1-23W-27K-A*		LUMIEN PRO	
Wattage/VA:	23/31.56	Lumens:	2206 MAX
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	With PRO Remote

DOB1-23W-30K-A*		LUMIEN PRO	
Wattage/VA:	23/31.56	Lumens:	2206 MAX
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	With PRO Remote

D7B1-23W-A*		LUMIEN PRO	
Wattage/VA:	23/32.03	Lumens:	2108 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	With PRO Remote

D9B1-23W-A*		LUMIEN PRO	
Wattage/VA:	23/31.05	Lumens:	1510 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	PSD-STK-8-018
RGB:	Yes	Dimmable:	With PRO Remote

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

Replacement Module

Offers 23W LumienPRO Replacement Modules Options. Dimmable via LP-REMOTE.



REPL-202 (LAB-202)
REPL-202-23W-27K*
REPL-202-23W-30K*
REPL-202-23W-RGBTW*
REPL-202-23W-TW*

Optical Accessory



PMGA-OPT-20-019
Mega Series
20° Optical Lens
(LAP-019)



GREENWICH, CT

GRAEF LIGHTING

BRASS

Flood



Deco Floodlight Antique

Brass - Antique, Deco Series Floodlight. Integrated Modular Variable. 6’ Lead Wire. 8” Spike with Adjustable Collar Included.

F6B1-5W-27K-A

Wattage/VA:	5/5.53	Lumens:	311
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	60°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV/ELV)

F6B1-5W-30K-A

Wattage/VA:	5/5.53	Lumens:	314
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	60°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV/ELV)

F6B1-10W-27K-A

Wattage/VA:	10/12.03	Lumens:	586
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	60°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV/ELV)

F6B1-10W-30K-A

Wattage/VA:	10/12.03	Lumens:	578
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	60°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV/ELV)

F7B1-10W-A*

Wattage/VA:	10/13.51	Lumens:	521 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	60°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	With PRO Remote

F9B1-10W-A*

Wattage/VA:	10/13.86	Lumens:	419 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	60°	Mounting:	PSD-STK-8-018
RGB:	Yes	Dimmable:	With PRO Remote

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

Replacement Module

Deco Series Replacement Module Options (Including uplight, downlight and floodlight applications).



REPL-036 (LAB-036)

REPL-036-5W-27K
REPL-036-5W-30K
REPL-036-10W-27K
REPL-036-10W-30K
REPL-036-10W-RGBTW*
REPL-036-10W-TW*



Essential Recessed

Antique 

Brass - Antique, Essential Series Recessed Hooded. 6’ Lead Wire. Integrated Non-Modular. Features 3 LED chips for an even spread of light minimizing hot spots.

W3B1-3.5W-27K-A

Wattage/VA:	3.5/2.88	Lumens:	120
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	75°	Mounting:	Not Included
RGB:	No	Dimmable:	Primary (MLV)

W3B1-3.5W-30K-A

Wattage/VA:	3.5/2.88	Lumens:	130
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	75°	Mounting:	Not Included
RGB:	No	Dimmable:	Primary (MLV)



Essential Surface Mount

Antique 

Brass - Antique, Essential Series Surface Mount Hooded. 6’ Lead Wire. Twist and Lock Connection Type for easy installation Integrated Non-Modular. Features 3 LED chips for an even spread of light minimizing hot spots.

W3B2-2.5W-27K-A

Wattage/VA:	2.5/3.09	Lumens:	92
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	75°	Mounting:	Twist & Lock
RGB:	No	Dimmable:	Primary (MLV/ELV)

W3B2-2.5W-30K-A

Wattage/VA:	2.5/3.09	Lumens:	95
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	75°	Mounting:	Twist & Lock
RGB:	No	Dimmable:	Primary (MLV/ELV)



Select Hardscape

Antique 

Brass - Antique, Select Series 6” Modular Hardscape. 6’ Lead Wire. Integrated Modular. Fixture is composed of housing and removable module for easy replacement.

W4B4-2.5W-27K-A

Wattage/VA:	2.5/4.38	Lumens:	134
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	115°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

W4B4-2.5W-30K-A

Wattage/VA:	2.5/4.38	Lumens:	122
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	115°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

W9B4-2.5W-A*

LUMIEN PRO

Wattage/VA:	2.5/5.01	Lumens:	56 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	115°	Dimmable:	With PRO Remote
RGB:	Yes		

Replacement Module



REPL-004 (LAB-004)
REPL-004-2.5W-27K
REPL-004-2.5W-30K
REPL-004-2.5W-RGBTW*



Select Step

Antique 

Brass - Antique, Select Series Micro Shell Enclosure Step Light. IP68 Rated Fixture. 6’ Lead Wire. Integrated Modular. Fixture is composed of housing and removable module for easy replacement.

M4B7-5.5W-27K-A

Wattage/VA:	5.5/8.66	Lumens:	312
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	65°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B7-5.5W-30K-A

Wattage/VA:	5.5/8.66	Lumens:	319
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	65°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

Replacement Module

Compatible with Brass Micro Module for flexible options of performance. See Details on Page 02G-3.



Brass Micro Module

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

M4B1-3.5W-27K-40-A
M4B1-3.5W-27K-60-A
M4B1-3.5W-30K-40-A
M4B1-3.5W-30K-60-A
M4B1-5.5W-27K-40-(A/R)
M4B1-5.5W-27K-40-R
M4B1-5.5W-27K-60-A
M4B1-5.5W-30K-40-A
M4B1-5.5W-30K-60-A

M0B1-4.5W-AMBR-A*

M7B1-4.5W-15-A*
M7B1-4.5W-40-(A/BK)*
M7B1-4.5W-60-A*

M8B1-3W-27K-40-(A/BK)*
M8B1-3W-30K-40-(A/BK)*

Step/Wall

BRASS

Underwater



Select Uplight

Raw 

Brass - Raw, Select Series Micro Short Solid Shroud Underwater Light. Integrated Modular. Lead wire is 30' to provide plenty of length to run outside of the water.

M4B5-5.5W-27K-R

Wattage/VA:	5.5/8.66	Lumens:	343
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	49°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B5-5.5W-30K-R

Wattage:	5.5/8.66	Lumens:	339
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	49°	Dimmable:	Primary (MLV/ELV)
RGB:	No		



Select 30° Uplight

Raw 

Brass - Raw, Select Series Micro 30° Uplight Shroud Underwater Light. Integrated Modular. Lead wire is 30' to provide plenty of length to run outside of the water.

M4B6-5.5W-27K-R

Wattage:	5.5/8.66	Lumens:	292
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	48°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B6-5.5W-30K-R

Wattage:	5.5/8.66	Lumens:	259
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	48°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

LumienFUEGO



A9B2-7W-A*

LUMIEN PRO

Brass - Antique, Tiki Torch (Riser Not Included. Order Separately.)

Wattage:	7/10.1	Lumens:	222 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	50-110°	Mounting:	Not Included
RGB:	Yes	Dimmable:	With PRO Remote




LumienFUEGO Riser

Brass - Antique, 48.5" Tiki Torch Riser. 6' Lead Wire. Mount Not Included. Recommend Trident Mounts.

BFGO-STM-48-192-A (LAB-192)

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

BRASS

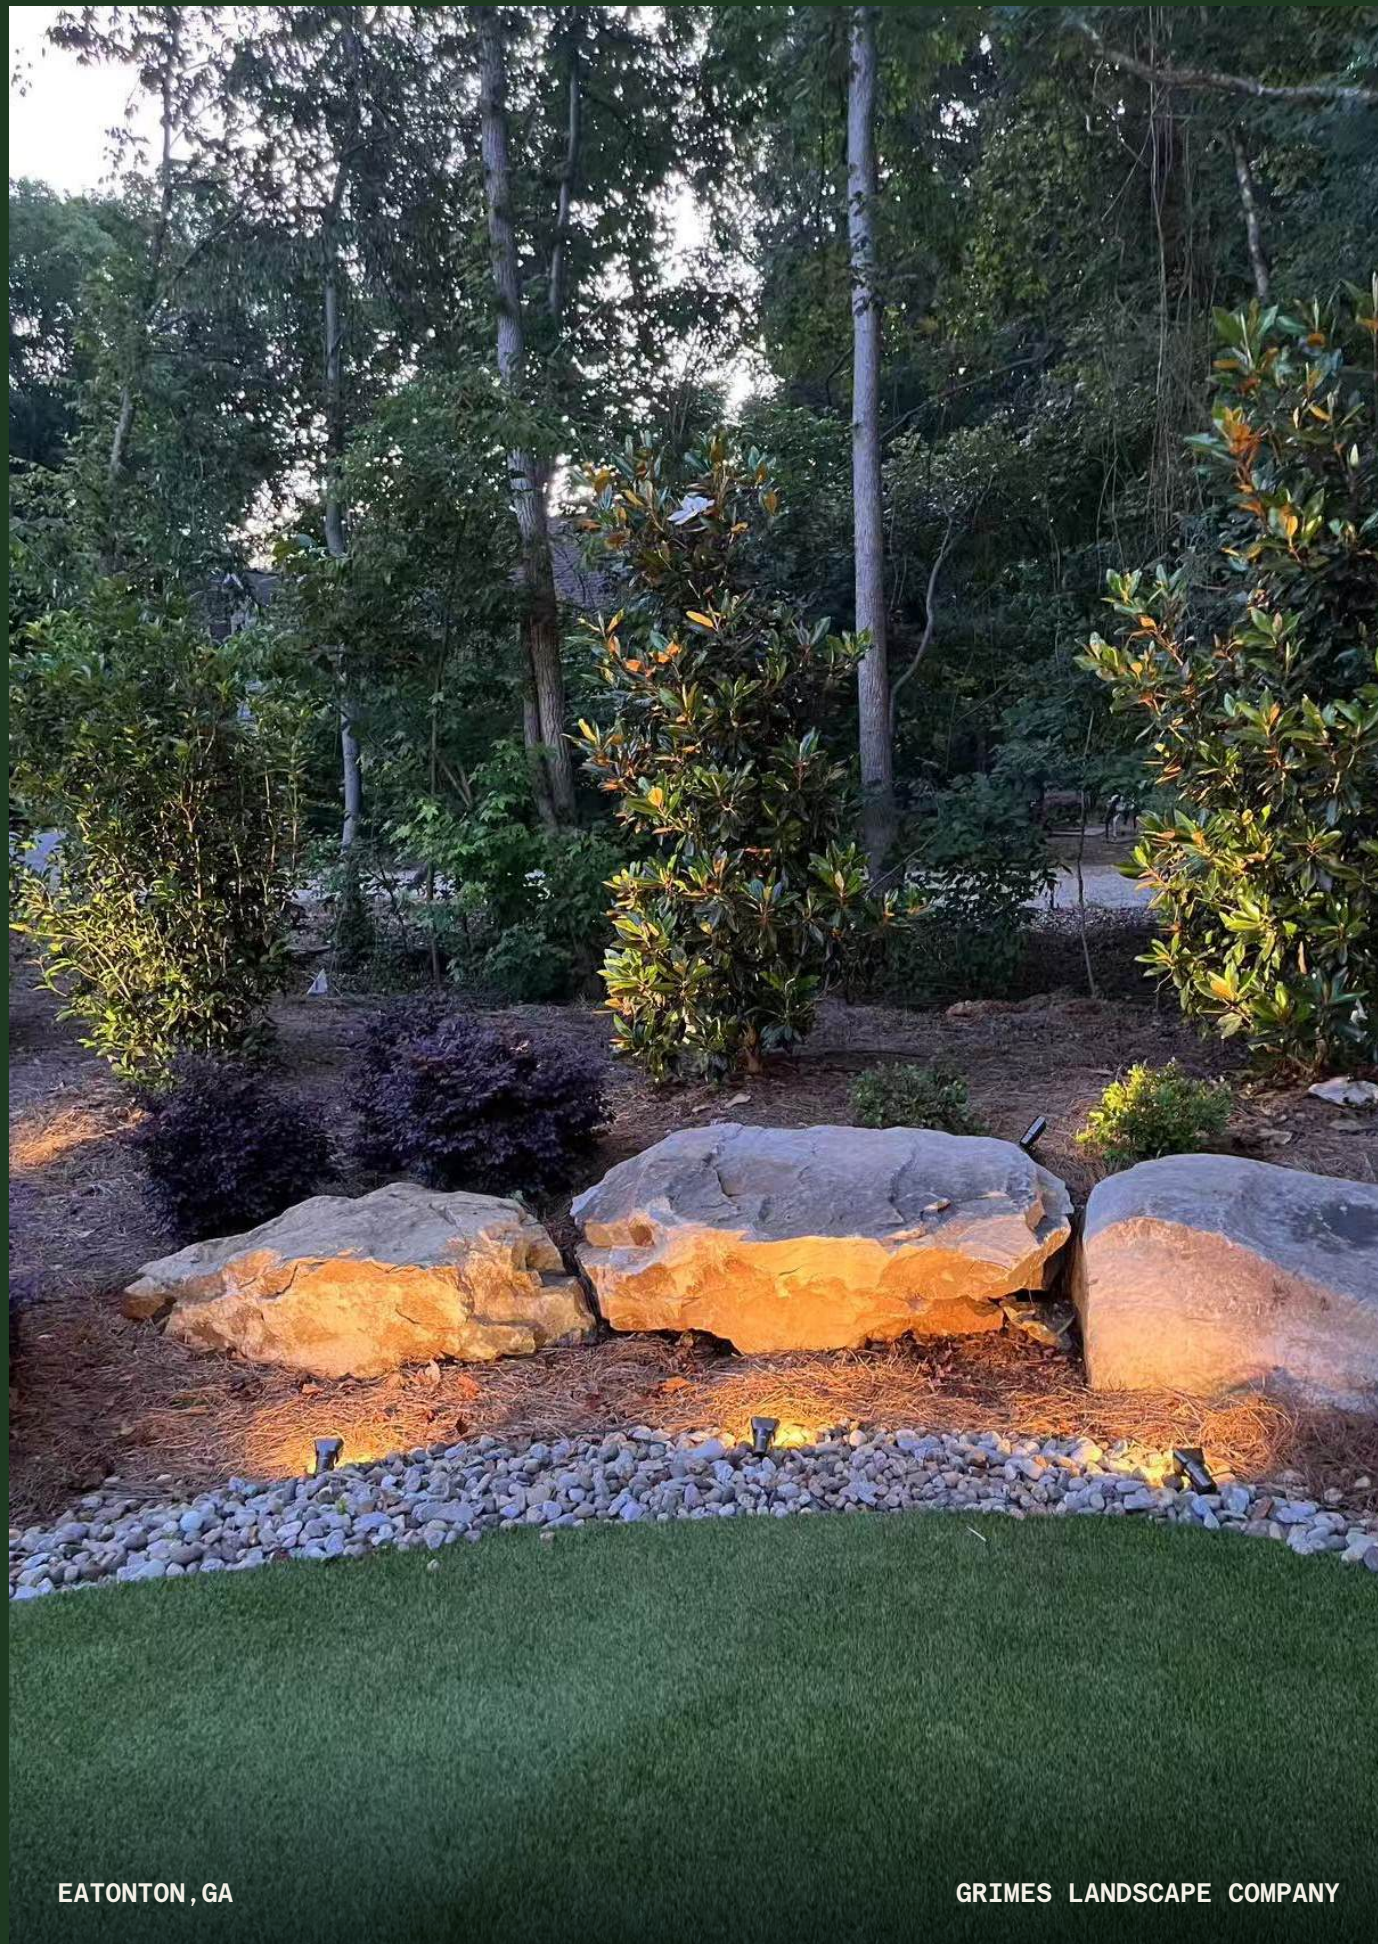

EATONTON, GA

GRIMES LANDSCAPE COMPANY

Brass Micro

02G



30° Uplight Package

Antique  Black 

Brass - Antique/Black, Drop In Series 30° Uplight Micro Package. Beam spread effect defers depending on module selection. 8” Spike with Adjustable Collar Included. (LAB-068) (Brass Micro Module Not Included. Order Separately)

BSD-PKG-068-(A/BK)

Voltage:	10-15V	Mounting:	PSD-STK-8-018
----------	--------	-----------	---------------



Flood Package

Antique  Black 

Brass-Antique/Black, Drop In Series Flood Micro Package. Beam spread effect defers depending on module selection. Gets up to 80° beam spread application. 8” Spike with Adjustable Collar Included. (LAB-070) (Brass Micro Module Not Included. Order Separately)

BSD-PKG-070-(A/BK)

Voltage:	10-15V	Mounting:	PSD-STK-8-018
----------	--------	-----------	---------------



53° Downlight Package

Antique  Black 

Brass - Antique/Black, Drop In Series 53° Downlight Micro Package. A Single Point Tree Mount Included. (LAB-069/LAB-069L) (Brass Micro Module Not Included. Order Separately)

BSD-PKG-069-(A/BK)

Voltage:	10-15V	Mounting:	BSD-MNT-001-A
----------	--------	-----------	---------------

BSD-PKG-069L-A

Voltage:	10-15V	Mounting:	BSD-MNT-001-A
----------	--------	-----------	---------------



Brass Riser

Antique 

Brass - Antique, Brass 1/2” Threaded Riser. 6’ Lead Wire. Compatible with Brass Micro Module and 1/2” Threaded Mounting Accessories.

BSD-STM-12-151-A (LAB-151)

Voltage:	10-15V	Length:	12”
Diameter:	1.06”	Lead Wire:	6’

BFGO-STM-48-192-A (LAB-192)

Voltage:	10-15V	Length:	48.5”
Diameter:	1.69”	Lead Wire:	6’



Brass
Micro Module

Antique Black Raw

Brass - Antique/ Black/ Raw, Brass Micro Module. Compatible with Brass Micro Accessory. Comes with 6’ Lead Wire. IP65 Rated When Assembled with Brass Micro Accessory Package.

M4B1-3.5W-27K-40-A

Wattage/VA:	3.5/5.59	Lumens:	316
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-3.5W-27K-60-A

Wattage/VA:	3.5/5.59	Lumens:	318
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-3.5W-30K-40-A

Wattage/VA:	3.5/5.59	Lumens:	327
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-3.5W-30K-60-A

Wattage/VA:	3.5/5.59	Lumens:	326
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-5.5W-27K-40-(A/R)

Wattage/VA:	5.5/8.66	Lumens:	428
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-5.5W-27K-60-A

Wattage/VA:	5.5/8.66	Lumens:	420
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-5.5W-30K-40-A

Wattage/VA:	5.5/8.66	Lumens:	472
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4B1-5.5W-30K-60-A

Wattage/VA:	5.5/8.66	Lumens:	435
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

Brass
Micro Module

Antique Black Raw

Brass - Antique/ Black/ Raw, Brass Micro Module. Compatible with Brass Micro Accessory. Comes with 6’ Lead Wire. IP65 Rated When Assembled with Brass Micro Accessory Package.

M0B1-4.5W-AMBR-A*

LUMIEN PRO

Wattage:	4.5/7.01	Lumens:	150 MAX
Wavelength:	Over 580	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	With PRO Remote
RGB:	Amber		

M7B1-4.5W-15-A*

LUMIEN PRO

Wattage/VA:	4.5/6.48	Lumens:	352 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	No		

M7B1-4.5W-40-(A/BK)*

LUMIEN PRO

Wattage/VA:	4.5/6.12	Lumens:	352 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	No		

M7B1-4.5W-60-A*

LUMIEN PRO

Wattage:	4.5/6.12	Lumens:	316 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	With PRO Remote
RGB:	No		

M8B1-3W-27K-40-(A/BK)*

LUMIEN PRO

Wattage/VA:	3/4.83	Lumens:	27K: 129
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	Yes		

M8B1-3W-30K-40-(A/BK)*

LUMIEN PRO

Wattage/VA:	3/4.83	Lumens:	30K: 141
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	Yes		



BRASS

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.



THE ALAMO (SAN ANTONIO, TX)

TEXAS OUTDOOR LIGHTING

Accessories

MOUNT



BSD-MNT-001-A

Brass - Antique,
1/2" Threaded Single Point
Tree Mount (LAB-001)



BSD-MNT-002-A

Brass - Antique,
1/2" Threaded Tree Mount
Bracket (LAB-002)



PSD-STK-12-001

Plastic,
1/2" Threaded 12" Spike
(LAP-001)



PSD-STK-8-002

Plastic,
1/2" Threaded 8" Spike
(LAP-002)



PSD-STK-15-005

Plastic, 1/2" Threaded 15"
Commercial Spike
(LAP-005)



PSD-STK-8-018

Plastic, 1/2" Threaded 8"
Spike with Adjustable Collar
(LAP-018)



SSSD-STK-12-002

Stainless Steel, 1/2"
Threaded 12" Trident Stake
(LAS-002-12)



SSSD-STK-6-002

Stainless Steel, 1/2"
Threaded 6" Trident Stake
(LAS-002-6)



SSSD-STK-6-007

Stainless Steel, 1/2"
Threaded Trident Stake,
3" Plate with 6" Stakes



SSSD-MNT-005-BK

Stainless Steel - Black, Tree
Mount, 1.5" X 4" (LAS-005)



SSSD-MNT-005XL-BK

Stainless Steel - Black, Tree
Mount, 2.5" X 6"
(LAS-005-XL)



A-MNT-009-(BZ/BK)

Aluminum - Bronze/Black,
Hardscape Surface-Mount
Bracket (LAA-009)



SSSD-STK-6-003

Stainless Steel,
1/2" Threaded 6" Mini Stake
(LAS-003)



BSD-MNT-207S-(A/MB)

Brass - Antique/Black,
1/2" Threaded
2" Canopy Mount



BSD-MNT-207M-(A/MB)

Brass - Antique/Black,
1/2" Threaded
3.5" Canopy Mount



BSD-MNT-207L-(A/MB)

Brass - Antique/Black,
1/2" Threaded
5" Canopy Mount

SECONDARY MOUNT



BSD-MNT-049-A

Brass - Antique,
1/2" Threaded L-Mount
(LAB-049)



BSD-MNT-050-A

Brass - Antique,
1/2" Threaded T-Mount
(LAB-050)



BSD-STM-4-058-A

Brass - Antique, 1/2"
Threaded 4" Riser
(LAB-058)



BSD-STM-8-051-A

Brass - Antique, 1/2"
Threaded 8" Riser
(LAB-051)

SECONDARY MOUNT



BSD-STM-16-052-A

Brass - Antique, 1/2" Threaded
16" Riser (LAB-052)



BSD-STM-24-053-A

Brass - Antique, 1/2"
Threaded 24" Riser
(LAB-053)



BSD-STK-SUB-188-A

Brass - Antique, 1-12"
Sub-Grade Adjustable Riser
(LAB-188)



BDCO-SHR-074-A

Brass - Antique, Deco Series
Downlight Shroud (LAB-074)

REPLACEMENT SHROUD



BDCO-SHR-073-A

Brass - Antique, Deco Series
Flood Shroud (LAB-073)



BDCO-SHR-201-A

Brass - Antique, Deco Series
Full Snoot Shroud (LAB-201)



BSD-RNG-066-A

Brass Set Ring (LAB-066)



BDCO-CAP-037


Aluminum - Raw, Deco Brass
Series, Threaded Cap
(LAB-037)

OPTICAL ACCESSORY



BQCM-MKR-022-A

Aluminum - Black, Deco
Series Banded Hex Louver
(LAA-022)



AQCM-HEX-016

Plastic - Deco Series
Asymmetrical Optic Lens
(LAP-016)

CONTROL



LP-REMOTE

LumienPRO Remote

BRASS



DALLAS, TX

Area/Path

03A



ESSENTIAL L-SHAPE PATH LIGHT



Essential L-Shape Bronze Black

Aluminum - Bronze/Black, Essential Series L-Shape Path Light. Integrated Non-Modular. 6’ Lead Wire. 8” Spike Included.

A3A3-6W-27K-(BZ/BK)

Wattage/VA:	6/9.76	Lumens:	467
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	80°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	Primary (MLV)

A3A3-6W-30K-(BZ/BK)

Wattage/VA:	6/9.76	Lumens:	486
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	80°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	Primary (MLV)

A9A3-6W-(BZ/BK)*

Wattage/VA:	6/9.11	Lumens:	361 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	80°	Mounting:	PSD-STK-8-018
RGB:	Yes	Dimmable:	With PRO Remote

LUMIEN PRO

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.



Essential Swivel Puck Bronze

Aluminum - Bronze, Essential Series Swivel Puck Path Light. Integrated Non-Modular. 6’ Lead Wire. 8” Spike Included.

A3A4-12W-27K-BZ

Wattage/VA:	12/14.7	Lumens:	776
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	80°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	Primary (MLV)

A3A4-12W-30K-BZ

Wattage/VA:	12/14.7	Lumens:	805
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	80°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	Primary (MLV)



Essential Bubble

Bronze

Aluminum - Bronze, Essential Series Bubble Hat Path Light. Integrated Variable. Use the rotating shroud to adjust beam spread from 2-7ft from center. 6’ Lead Wire. 8” Spike with Adjustable Collar Included.

A5A2-4W-27K-BZ

Wattage/VA:	4/6.06	Lumens:	189
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	60-120°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV)

A5A2-4W-30K-BZ

Wattage/VA:	4/6.06	Lumens:	189
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	60-120°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV)



Essential Flat Top

BronzeBlack

Aluminum - Bronze/Black, Essential Series Flat Top Dome Hat Path Light. Integrated Variable. Use the rotating shroud to adjust beam spread from 2-7ft from center. 6’ Lead Wire. 8” Spike with Adjustable Collar Included.

A5A4-4W-27K-(BZ/BK)

Wattage/VA:	4/6.06	Lumens:	174
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	60-120°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV)

A5A4-4W-30K-(BZ/BK)

Wattage/VA:	4/6.06	Lumens:	185
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	60-120°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV)

Hat Accessory

BronzeBlack



ADCO-CAP
-037-(BZ/BK)
(LAA-037)



ADCO-CAP
-039-(BZ/BK)
(LAA-039)



ADCO-CAP
-040-(BZ/BK)
(LAA-040)

+



Deco ADJ Beam

BronzeBlack

Aluminum - Bronze/Black, Deco Series 18” Riser Path Light w/Module with Adjustable Beam Spread. Integrated Modular Variable. Field Changeable. 6’ Lead Wire. 8” Spike with Adjustable Collar Included.

A6A1-4W-27K-(BZ/BK)

Wattage/VA:	4/5.58	Lumens:	192
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	60-120°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV)

A6A1-4W-30K-(BZ/BK)

Wattage/VA:	4/5.58	Lumens:	218
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	60-120°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	Primary (MLV)



A9A1-7W-(BZ/BK)*

LUMIEN PRO

Wattage/VA:	7/10.1	Lumens:	222 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	60-120°	Mounting:	PSD-STK-8-018
RGB:	Yes	Dimmable:	With PRO Remote

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.



GREENWICH, CT

GRAEF LIGHTING

Directional

03B



MR16 Drop-In

Bronze  Black 

Aluminum - Bronze/Black, Drop In Series MR16 Uplight. Drop-In. 6’ Lead Wire. 8” Spike with Adjustable Collar Included. (Lamp Not Included. Order Separately)



MR11 Drop-In

Bronze  Black 

Aluminum - Bronze/Black, Drop In Series MR11 Uplight. Drop-In. 6’ Lead Wire. 8” Spike with Adjustable Collar Included. (Lamp Not Included)



Essential Uplight

Bronze  Black 

Aluminum - Bronze/Black, Essential Series Uplight. Integrated Non-Modular. Fully Integrated 5W/12W Light Source with Adjustable Shroud. 6’ Lead Wire. 8” Spike Included.

D1A1-(BZ/BK)

Voltage: 10-15V Mounting: PSD-STK-8-018

MR16 Lamps



D1A2-(BZ/BK)

Voltage: 10-15V Mounting: PSD-STK-8-018

Optical Accessory

LEDMR16-HEX
Aluminum - Black,
MR16 Hex Louver



LED-PRO-5.5W-MR16-ALL-8-TW*

LUMIEN PRO

Wattage/VA:	5.5/8.6	Lumens:	450
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	20°, 40°, 60°, 100°	Dimmable:	With PRO Remote
RGB:	No	CRI:	80+

LED-PRO-5.5W-MR16-08-927*

LUMIEN PRO

Wattage/VA:	5.5/7.8	Lumens:	270
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	8°	Dimmable:	With PRO Remote
RGB:	No	CRI:	90+

LED-PRO-3.5W-MR16-40-8-RGBTW*

LUMIEN PRO

Wattage/VA:	3.5/5.6	Lumens:	27K: 135
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	Yes	CRI:	80+

LED-PRO-5.5W-MR16-08-930*

LUMIEN PRO

Wattage/VA:	5.5/7.8	Lumens:	315
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	8°	Dimmable:	With PRO Remote
RGB:	No	CRI:	90+

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

D3A2-5W-27K-(BZ/BK)

Wattage/VA:	5/6.95	Lumens:	390
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	26-50°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	No

D3A2-5W-30K-(BZ/BK)

Wattage/VA:	5/6.95	Lumens:	400
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	26-50°	Mounting:	PSD-STK-8-018
RGB:	No	Dimmable:	No

D3A1-12W-27K-(BZ/BK)

Wattage/VA:	12/15.03	Lumens:	937
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	37-70°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	No

D3A1-12W-30K-(BZ/BK)

Wattage/VA:	12/15.03	Lumens:	996
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	37-70°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	No



ALUMINUM



Deco Uplight

Bronze  Black 

Aluminum - Bronze/Black, Deco Series Uplight (Includes 40° Optic & Hex Louver). Integrated Variable. Additional Lens Options are Available. 6’ Lead Wire. 8” Spike Included.

D5A1-8W-27K-(BZ/BK)

Wattage/VA:	8/8.79	Lumens:	641
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	Primary (MLV/ELV)

D5A1-8W-30K-(BZ/BK)

Wattage/VA:	8/8.79	Lumens:	650
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	Primary (MLV/ELV)

D5A1-15W-27K-(BZ/BK)

Wattage/VA:	15/15.12	Lumens:	1100
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	Primary (MLV/ELV)

D5A1-15W-30K-(BZ/BK)

Wattage/VA:	15/15.12	Lumens:	1200
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	Primary (MLV/ELV)

D7A1-12W-(BZ/BK)*

LUMIEN PRO

Wattage/VA:	12/17.18	Lumens:	830 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	With PRO Remote

D9A1-12W-(BZ/BK)*

LUMIEN PRO

Wattage/VA:	12/17.28	Lumens:	610 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	PSD-STK-8-002
RGB:	Yes	Dimmable:	With PRO Remote



Deco Downlight

Bronze  Black 

Aluminum - Bronze/Black, Deco Series Downlight (Includes 40° Optic & Hex Louver). Integrated Variable. Additional Lens Options are Available. 30’ Lead Wire.



D5A2-8W-27K-(BZ/BK)

Wattage/VA:	8/8.79	Lumens:	574
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	Not included
RGB:	No	Dimmable:	Primary (MLV/ELV)

D5A2-8W-30K-(BZ/BK)

Wattage/VA:	8/8.79	Lumens:	576
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	Not included
RGB:	No	Dimmable:	Primary (MLV/ELV)

D5A2-15W-27K-(BZ/BK)

Wattage:	15/16.12	Lumens:	951
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	Not included
RGB:	No	Dimmable:	Primary (MLV/ELV)

D5A2-15W-30K-(BZ/BK)

Wattage:	15/16.12	Lumens:	989
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	Not included
RGB:	No	Dimmable:	Primary (MLV/ELV)

D7A2-12W-(BZ/BK)*

LUMIEN PRO

Wattage/VA:	12/17.18	Lumens:	729 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	Not included
RGB:	No	Dimmable:	With PRO Remote

D9A2-12W-(BZ/BK)*

LUMIEN PRO

Wattage/VA:	12/17.28	Lumens:	526 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Mounting:	Not included
RGB:	Yes	Dimmable:	With PRO Remote

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

Flood

F5A1-8W-27K-(BZ/BK)

Wattage/VA:	8/8.79	Lumens:	445
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	80°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	Primary (MLV/ELV)

F5A1-8W-30K-(BZ/BK)

Wattage:	8/8.79	Lumens:	445
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	80°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	Primary (MLV/ELV)

F5A1-15W-27K-(BZ/BK)

Wattage/VA:	15/15.12	Lumens:	748
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	80°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	Primary (MLV/ELV)

F5A1-15W-30K-(BZ/BK)

Wattage:	15/15.12	Lumens:	686
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	80°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	Primary (MLV/ELV)

F7A1-12W-(BZ/BK)*

LUMIEN PRO

Wattage/VA:	12/16.21	Lumens:	586 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	80°	Mounting:	PSD-STK-8-002
RGB:	No	Dimmable:	With PRO Remote

F9A1-12W-(BZ/BK)*

LUMIEN PRO

Wattage/VA:	12/16.12	Lumens:	411 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	80°	Mounting:	PSD-STK-8-002
RGB:	Yes	Dimmable:	With PRO Remote

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.



Deco Floodlight

Bronze  Black 

Aluminum - Bronze/Black, Deco Series Floodlight (Includes 60° Optic). Integrated Variable. Additional Lens Options are Available. 6’ Lead Wire. 8” Spike Included.

Pendant



Essential Pendant

Bronze 

Aluminum - Bronze, Essential Series 4.5” Short Shroud. Integrated Non-Modular. 6’ Lead Wire.

P3A1-5W-30K-BZ

Wattage/VA:	5/7.12	Lumens:	407
Temperature:	3000K	Voltage:	10-15V
RGB:	No	Dimmable:	Primary (MLV)



ORANGEBURG , SC

HAY HILL SERVICES

Step



Essential 5” Shielded Bronze
Aluminum - Bronze, Essential Series 5” Shielded Step Light. Integrated Non-Modular. 6’ Lead Wire.

S3A1-3W-27K-BZ			
Wattage/VA:	3/4.34	Lumens:	54
Temperature:	2700K	Voltage:	10-15V
RGB:	No	Dimmable:	Primary (MLV/ELV)

S3A1-3W-30K-BZ			
Wattage/VA:	3/4.34	Lumens:	55
Temperature:	3000K	Voltage:	10-15V
RGB:	No	Dimmable:	Primary (MLV/ELV)



Essential 9” Shielded Bronze
Aluminum - Bronze, Essential Series 9” Shielded Step Light. Integrated Non-Modular. 6’ Lead Wire.

S3A4-6W-30K-BZ			
Wattage/VA:	6/8.59	Lumens:	125
Temperature:	3000K	Voltage:	10-15V
RGB:	No	Dimmable:	Primary (MLV/ELV)

Accessory
Step Light Junction Box



PESL-JBX-9-003
Plastic - 8.6” (LAP-003)



PESL-JBX-5-004
Plastic - 4.8” (LAP-004)

ALUMINUM



Essential Sconce

Bronze

Aluminum - Bronze, Essential Series Downlight Sconce. Integrated Non-Modular. 6’ Lead Wire.



Essential Up/Down Sconce

Bronze

Aluminum - Bronze, Essential Series Up/Down Sconce. Integrated Non-Modular. 6’ Lead Wire.

W3A2-10W-30K-BZ

Wattage/VA:	10/12.51	Lumens:	816
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	80°	Dimmable:	Primary (MLV)
RGB:	No		

W3A3-10W-30K-BZ

Wattage/VA:	(2) 10/24.53	Lumens:	(2) 825
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	(2) 80°	Dimmable:	Primary (MLV)
RGB:	No		



Deco Hardscape

Aluminum - Bronze/Black, Deco Series 6” Adjustable Modular Hardscape with Undercap Mount. 6’ Lead Wire.



Bronze

Black

Aluminum - Bronze/Black, Deco Series 6” Adjustable Modular Hardscape with Surface Mount. 6’ Lead Wire.

W7A5-3.5W-(BZ/BK)*

LUMIEN PRO

Wattage/VA:	3.5/5.44	Lumens:	193 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	100°	Mounting:	Undercap Mount
RGB:	No	Dimmable:	With PRO Remote

W7A6-3.5W-(BZ/BK)*

LUMIEN PRO

Wattage/VA:	3.5/5.44	Lumens:	193 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	100°	Mounting:	Surface Mount
RGB:	No	Dimmable:	With PRO Remote

W9A5-3.5W-(BZ/BK)*

LUMIEN PRO

Wattage/VA:	3.5/5.44	Lumens:	193 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	100°	Mounting:	Undercap Mount
RGB:	Yes	Dimmable:	With PRO Remote

W9A6-3.5W-(BZ/BK)*

LUMIEN PRO

Wattage/VA:	3.5/5.44	Lumens:	193 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	100°	Mounting:	Surface Mount
RGB:	Yes	Dimmable:	With PRO Remote

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

Accessory



SSDCO-STK-008-BK

Stainless Steel - Ground Stake (LAS-008-BK)



ADCO-HEX-196-(BZ/BK)

Aluminum - Hex Louver (LAA-196)



ADCO-LVR-197-(BZ/BK)

Aluminum - Single Lower Glare Shield with Clip-In Hex (LAA-197)



REPL-198-TW-(BZ/BK)*


Tunable White Replacement Module (LAA-198-TW)



REPL-199-RGBTW-(BZ/BK)*

Tunbale White + RGB Replacement Module (LAA-199-RGBTW)

Wall

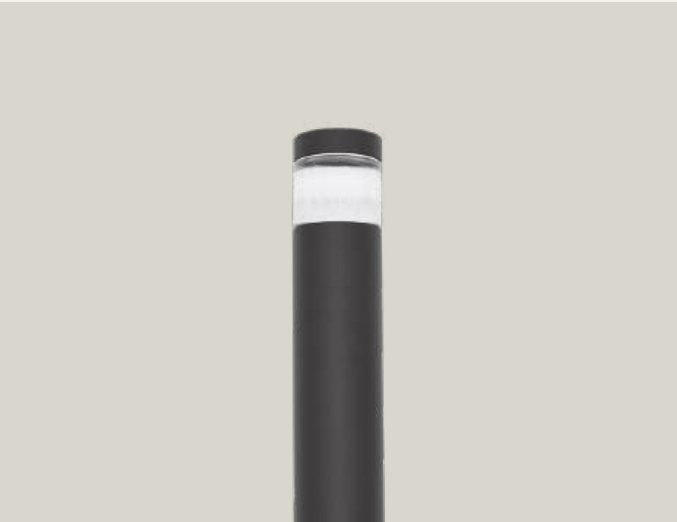

Flat Top Bollard

Bronze  Black 

Aluminum - Bronze/Black, Area/Path, Drop In Series Flat Top Bollard. Modular. (Aluminum Micro Module Not Included. Order Separately.) 6’ Lead Wire. 8” Spike with Adjustable Collar Included.

A2A1-(BZ/BK)

Voltage: 10-15V Mounting: PSD-STK-8-018



Rounded Top Bollard

Bronze  Black 

Aluminum - Bronze/Black, Area/Path, Drop In Series Rounded Top Bollard. Modular. (Aluminum Micro Module Not Included. Order Separately.) 6’ Lead Wire. 8” Spike with Adjustable Collar Included.

A2A2-(BZ/BK)

Voltage: 10-15V Mounting: PSD-STK-8-018



30° Uplight Package

Bronze  Black 

Aluminum - Bronze/Black, Directional, Drop In Series 30° Uplight Package. (Aluminum Micro Module Not Included. Order Separately.) 6’ Lead Wire. 8” Spike Included.

ASD-PKG-068-(BZ/BK)

Voltage: 10-15V Mounting: PSD-STK-8-002

Aluminum Micro



ALUMINUM MICRO UPLIGHT



53° Downlight Package

Bronze  Black 

Aluminum - Bronze/Black, Directional, Drop In Series 52° Downlight Package. (Aluminum Micro Module Not Included. Order Separately.) 30’ Lead Wire.

ASD-PKG-069-(BZ/BK)

Voltage:	10-15V	Mounting:	Not Included
----------	--------	-----------	--------------



Flood Package

Bronze  Black 

Aluminum - Bronze/Black, Flood, Drop In Series Flood Package. (Aluminum Micro Module Not Included. Order Separately.) 6’ Lead Wire. 8” Spike Included.

ASD-PKG-070-(BZ/BK)

Voltage:	10-15V	Mounting:	PSD-STK-8-018
----------	--------	-----------	---------------



Aluminum Micro Module

Black 

Aluminum - Black, Micro Module. Compatible with Drop In Series Aluminum Micro Accessory Package.

M4A1-3.5W-27K-40-BK

Wattage/VA:	3.5/5.59	Lumens:	316
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4A1-3.5W-27K-60-BK

Wattage/VA:	3.5/5.59	Lumens:	318
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4A1-3.5W-30K-40-BK

Wattage/VA:	3.5/5.59	Lumens:	327
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4A1-3.5W-30K-60-BK

Wattage/VA:	3.5/5.59	Lumens:	326
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4A1-5.5W-27K-40-BK

Wattage/VA:	5.5/8.66	Lumens:	428
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4A1-5.5W-27K-60-BK

Wattage/VA:	5.5/8.66	Lumens:	420
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4A1-5.5W-30K-40-BK

Wattage/VA:	5.5/8.66	Lumens:	472
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M4A1-5.5W-30K-60-BK

Wattag/VA:	5.5/8.66	Lumens:	435
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	60°	Dimmable:	Primary (MLV/ELV)
RGB:	No		

M7A1-4.5W-40-BK*

LUMIEN PRO

Wattage/VA:	4.5/5.52	Lumens:	352 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	No		

M8A1-3W-27K-40-BK*

LUMIEN PRO

Wattage/VA:	3/4.83	Lumens:	27K: 129
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	Yes		

M8A1-3W-30K-40-BK*

LUMIEN PRO

Wattage:	3/4.83	Lumens:	30K: 141
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	Yes		

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

MOUNT



ASD-MNT-001-(BZ/BK)
Aluminum - Bronze/Black,
1/2" Threaded Base
(LAA-001)



ASD-JBX-002-(BZ/BK)
Aluminum - Bronze/Black,
1/2" Threaded Junction Box
(LAA-002)



ASD-MNT-003-(BZ/BK)
Aluminum - Bronze/Black,
1/2" Threaded L-Mount
(LAA-003)



ASD-MNT-004-(BZ/BK)
Aluminum - Bronze/Black,
1/2" Threaded T-Mount
(LAA-004)



A-MNT-009-(BZ/BK)
Aluminum - Bronze/Black,
Hardscape Surface-Mount
Bracket (LAA-009)



SSD-MNT-021-(BZ/BK)
Stainless Steel - Bronze/Black,
Gutter Mount Bracket
(LAA-021)



ASD-MNT-025-(BZ/BK)
Aluminum - Bronze/Black,
Single-Point Tree Mount
(LAA-025)



PSD-STK-12-001
Plastic, 1/2" Threaded
12" Spike
(LAP-001)



PSD-STK-8-002
Plastic, 1/2" Threaded
8" Spike (LAP-002)



PSD-STK-15-005
Plastic, 1/2" Threaded
15" Commercial Spike
(LAP-005)



PSD-STK-8-018
Plastic, 1/2" Threaded 8"
Spike with Adjustable Collar
(LAP-018)



SSSD-STK-6-003
Stainless Steel - 1/2" Threaded
6" Mini Stake (LAS-003)



SSSD-STK-12-002
Stainless Steel -
12" Trident Stake
(LAS-002-12)



SSSD-STK-6-002
Stainless Steel -
6" Trident Stake
(LAS-002-6)



SSSD-STK-6-007
Stainless Steel, 1/2"
Threaded Trident Stake,
3" Plate with 6" Stakes

Accessories

MOUNTS CONTINUED



SS-WIRE-001
Stainless Steel - Wire Cable for Hanging Tree Light (LAS-001)



SSSD-MNT-005-BK
Stainless Steel - Black, Tree Mount, 1.5" X 4" (LAS-005)



SSSD-MNT-005XL-BK
Stainless Steel - Black, Tree Mount, 2.5" X 6" (LAS-005-XL)

SECONDARY MOUNT



ASD-STM-4-020-(BZ/BK)
Aluminum - Bronze/Black, 1/2" Threaded 4" Riser (LAA-020)



ASD-STM-8-005-(BZ/BK)
Aluminum - Bronze/Black, 1/2" Threaded 8" Riser (LAA-005)



ASD-STM-16-006-(BZ/BK)
Aluminum - Bronze/Black, 1/2" Threaded 16" Riser (LAA-006)



ASD-STM-24-007-(BZ/BK)
Aluminum - Bronze/Black, 1/2" Threaded 24" Riser (LAA-007)



ASD-STM-ADJ-008-(BZ/BK)
Aluminum - Bronze/Black, 1/2" Adjustable 16-25" Riser (LAA-008)



ASD-RNG-031-BZ
Aluminum - Bronze, 1/2" Threaded Set Ring (LAA-031)

REPLACEMENT SHROUD



AESL-SHR-017-(BZ/BK)
Aluminum - Bronze, MR16 Cylinder Shroud (LAA-017)



AESL-SHR-015-(BZ/BK)
Aluminum - Bronze, MR11 Cylinder Shroud (LAA-015)




ADCO-SHR-023-(BZ/BK)
Aluminum - Bronze/Black, Deco Series Downlight Shroud (LAA-023)



ADCO-SHR-026-(BZ/BK)
Aluminum - Bronze/Black, Deco Series Flood Shroud (LAA-026)

OPTICAL ACCESSORY

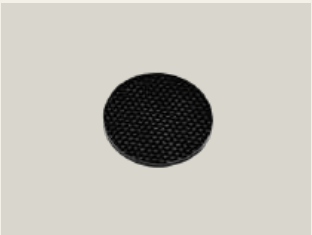

ADCO-HEX-022
Aluminum - Black, Deco Series Banded Hex Louver (LAA-022)



PDZ-OPT-15-010
Plastic - Deco Series 15° Optic Lens (LAP-010)




PDZ-OPT-60-011
Plastic - Deco Series 40° Optic Lens (LAP-011)



PDZ-OPT-60-012
Plastic - Deco Series 60° Optic Lens (LAP-012)



PDZ-OPT-80-013
Plastic - Deco Series 80° Optic Lens (LAP-013)

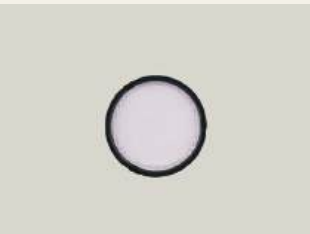

PDZ-OPT-ASYM-016
Plastic - Deco Series Asymmetrical Optic Lens (LAP-016)



GDCO-OPT-005-MV
Glass - Deco Series Mercury Vapor Lens (LAG-005)

CONTROL



LP-REMOTE
LumienPRO Remote



BUCKHEAD , GA

FIREFLY LIGHTING, LLC.

Specialty



LumienACE



Compatible Module

Compatible with Brass Micro Module for flexible options of performance. See Details on Page 03A-3.



Brass Micro Module

M4B1-3.5W-27K-40-A
M4B1-3.5W-27K-60-A
M4B1-3.5W-30K-40-A
M4B1-3.5W-30K-60-A
M4B1-5.5W-27K-40-(A/R)
M4B1-5.5W-27K-40-R
M4B1-5.5W-27K-60-A
M4B1-5.5W-30K-40-A
M4B1-5.5W-30K-60-A

M0B1-4.5W-AMBR-A*

M7B1-4.5W-15-A*
M7B1-4.5W-40-(A/BK)*
M7B1-4.5W-60-A*

M8B1-3W-27K-40-(A/BK)*
M8B1-3W-30K-40-(A/BK)*


LumienACE Putting Green Cup

LumienACE Putting Green 6" PVC Cup and Flag Pole.
Brass Micro Accessory Package.
(Brass Micro Module Not Included. Order Separately)
(LAB-180)

PBACEM-GLF-180-WH

LumienARC

04B

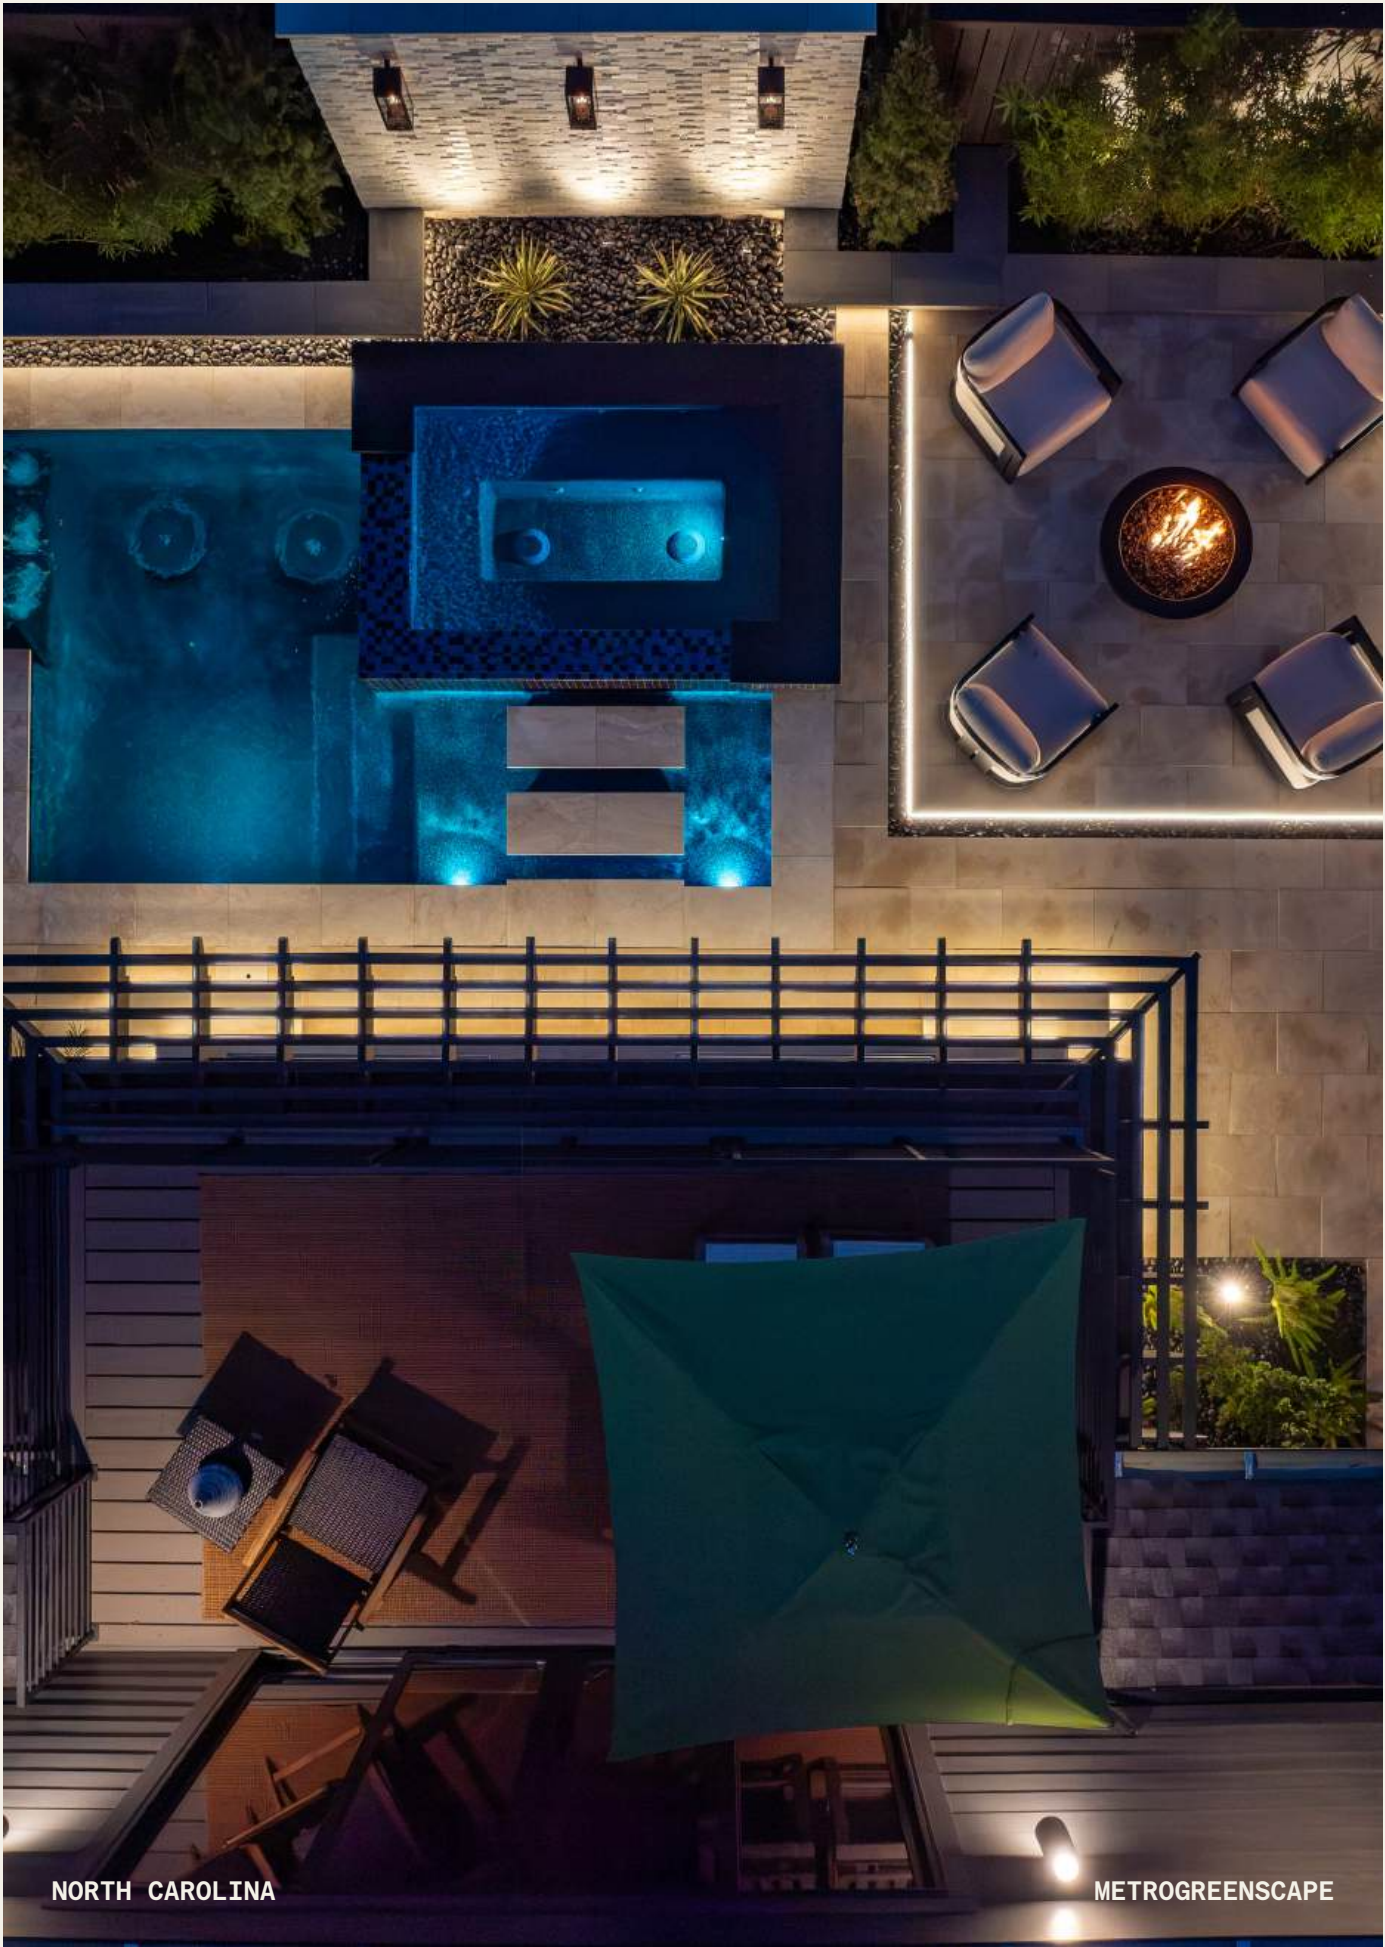

NORTH CAROLINA

METROGREENSCAPE

SPECIALTY



LumienARC

Small Profile 12V AC LumienARC Linear Hardscape Solution. Dual-End Power Leads Offered in 5’, 10’, 15’, 20’, and 30’ lengths. Both segments remain functional after cutting, reducing waste and enhancing flexibility.

L3S1-5-10W-27K-WH

Wattage/VA:	10/10.9	Lumens:	72 Lm/Ft
Temperature:	3000K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	5’	Dimmable:	Primary via MLV

L3S1-5-10W-30K-WH

Wattage/VA:	10/10.9	Lumens:	76 Lm/Ft
Temperature:	3000K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	5’	Dimmable:	Primary via MLV

L3S1-1-2W-27K-WH

Wattage/VA:	2/2.1	Lumens:	72 Lm/Ft
Temperature:	2700K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	1’	Dimmable:	Primary via MLV

L3S1-1-2W-30K-WH

Wattage/VA:	2/2.1	Lumens:	76 Lm/Ft
Temperature:	3000K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	1’	Dimmable:	Primary via MLV

L3S1-3-6W-27K-WH

Wattage/VA:	6/6.8	Lumens:	72 Lm/Ft
Temperature:	2700K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	3’	Dimmable:	Primary via MLV

L3S1-3-6W-30K-WH

Wattage/VA:	6/6.8	Lumens:	76 Lm/Ft
Temperature:	3000K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	3’	Dimmable:	Primary via MLV

L3S1-10-20W-27K-WH

Wattage/VA:	20/21.2	Lumens:	72 Lm/Ft
Temperature:	2700K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	10’	Dimmable:	Primary via MLV

L3S1-10-20W-30K-WH

Wattage/VA:	20/21.2	Lumens:	76 Lm/Ft
Temperature:	3000K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	10’	Dimmable:	Primary via MLV

L3S1-15-30W-27K-WH

Wattage/VA:	30/31.5	Lumens:	72 Lm/Ft
Temperature:	2700K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	15’	Dimmable:	Primary via MLV

L3S1-15-30W-30K-WH

Wattage:	30/31.5	Lumens:	76 Lm/Ft
Temperature:	3000K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	15’	Dimmable:	Primary via MLV

L3S1-20-40W-27K-WH

Wattage:	40/42.2	Lumens:	72 Lm/Ft
Temperature:	2700K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	15’	Dimmable:	Primary via MLV

L3S1-20-40W-30K-WH

Wattage:	40/42.2	Lumens:	76 Lm/Ft
Temperature:	3000K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	15’	Dimmable:	Primary via MLV


L3S1-30-60W-27K-WH

Wattage:	60/63.2	Lumens:	72 Lm/Ft
Temperature:	2700K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	30’	Dimmable:	Primary via MLV

L3S1-30-60W-30K-WH

Wattage:	60/63.2	Lumens:	76 Lm/Ft
Temperature:	3000K	Voltage:	12VAC
Beam Spread:	120°	Mounting:	Not Included
Length:	30’	Dimmable:	Primary via MLV

MOUNTING CHANNELS



AARC-MNT-027-BK

Aluminum - Black, 5ft Rigid Channel (LAA-027)



AARC-MNT-028-BK

Aluminum - Black, 5ft Rigid Channel with 1-Sided Glare Shield (LAA-028)



AARC-MNT-029-BK

Aluminum - Black, 5ft Flex Channel (LAA-029)



AARC-MNT-030-BK

Aluminum - Black, 5ft Flex Channel with 1-Sided Glare Shield (LAA-030)

GROUND STAKE



SSARC-STK-006

Stainless Steel - Black, Channel Spike (LAS-006)

MOUNTING CORNERS



AARC-MNT-041-BK

Aluminum - Black, Flush Corner (LAA-041)



AARC-MNT-042-BK

Aluminum - Black, Inner Tall Wall (LAA-042)




AARC-MNT-043-BK

Aluminum - Black, Outer Tall Wall (LAA-043)



SSARC-CNX-044-BK

Aluminum - Black, Channel Connector. 10 per pack (LAA-044)



SSARC-MNT-045-BK

Aluminum - Black, Channel Under Cap Plate. (LAA-045)



MR16 LED Lamp

Aluminum - Black, MR16 Drop-In Lamp. Installation base is included in the package.

LED-PRO-5.5W-MR16-ALL-8-TW*

Wattage/VA:	5.5/8.6	Lumens:	450 MAX
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	20°, 40°, 60°, 100°	Dimmable:	With PRO Remote
RGB:	No	CRI:	80+

LED-PRO-3.5W-MR16-40-8-RGBTW*

Wattage/VA:	3.5/5.6	Lumens:	27K: 135
Temperature:	2700K-5700K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	Yes	CRI:	80+

* Requires LumienPRO Remote; Lumen output varies based on PRO function. See spec sheet for details.

LED-PRO-5.5W-MR16-08-927*

Wattage/VA:	5.5/7.8	Lumens:	270 MAX
Temperature:	2700K	Voltage:	10-15V
Beam Spread:	8°	Dimmable:	With PRO Remote
RGB:	No	CRI:	90+

LED-PRO-5.5W-MR16-08-930*

Wattage/VA:	5.5/7.8	Lumens:	315 MAX
Temperature:	3000K	Voltage:	10-15V
Beam Spread:	40°	Dimmable:	With PRO Remote
RGB:	Yes	CRI:	90+

Lamp

Optical
Accessory

A small, circular, black hexagonal louver accessory for the MR16 lamp.

LEDMR16-HEX
Aluminum - Black,
Hex Louver

04C



Transformer

Stainless Stee - Raw, 3 Common taps Low-Voltage Transformer (one 12V and two 15V). Timer and photocell receptacles. Removable drop-down door and 5 conduit knockouts to provide easy terminal access and flexible wiring. ETL Listed.

TR-150-S

Wattage:	150	Input Voltage:	120V
Output Voltage:	12V, 15V, 15V		

TR-300-S

Wattage:	150	Input Voltage:	120V
Output Voltage:	12V, 15V, 15V		

IQ Transformer

Stainless Stee - Raw, 4-Zone Smart Transformer. Control with Lumien App. UL 1838.

TR-IQ400

VA:	400 (100VA per Zone)
Input Voltage:	120V
Output Voltage:	Zone 1-3: 15V; Zone 4: 18V

TR-IQ600

VA:	600 (150VA per Zone)
Input Voltage:	120V
Output Voltage:	Zone 1-3: 15V; Zone 4: 18V

Transformer

04D

SPECIALTY

Glossary

Warranty Policy

12V Electronics/Light Sources:	Ten (10) year
Brass Housings:	Lifetime (finish excluded)
Aluminum Housings:	Ten (10) year (finish excluded)
Brass Finish:	Ten (10) year
Aluminum Finish:	Five (5) year
Stainless Steel Finish:	Lifetime
Aluminum Accessories	Ten (10) year (finish excluded)
Brass Accessories:	Lifetime (finish excluded)
Plastic Accessories:	Lifetime
Glass Accessories:	One (1) year
LumienARC:	Three (3) year
LumienVIBE:	Five (5) year (finish excluded)
Transformer:	Ten (10) year

LED Engine Guide

LUMIEN CORE

LED Engines with 2700K or 3000K Static Kelvin Temperature. Dimmable via Primary or Secondary Side.

LUMIEN PRO

LED Engines with Adjustable Kelvin Temperature from 2700K to 5700K. Dimmable from 100% - 0% via PRO Remote (Order Separately). Offers 12 Preset Color by Selection.

Fixture Guide

Fixture Type	Fixture Components	Fixture Material	Fixture Style*	Watts*	CCT	Finish
D Directional	1 Drop-In	A Aluminum	*Depends on fixture		27K 2700K	Aluminum
A Area	2 Modular	B Brass			30K 3000K	BK Black Powder Coat
F Flood	3 Integrated Non-Modular					BZ Bronze Powder Coat
W Wall	4 Integrated Modular					Brass
R Recessed	5 Integrated Variable					A Antique Bronze
S Step	6 Integrated Modular Variable					BK Black
P Pendant	7 LumienPRO TW 2700K-5700K					R Raw w/Clear Coat
M Micro	8 LumienPRO RGBW 12 Preset Color + Defined CCT					
N Nano	9 LumienPRO RGBTW 12 Preset Color + 2700K-5700K					
Z Macro	0 LumienPROdim dimmable via PRO remote					

Series Guide

Drop-In Series	Fixtures that do not come with a light source Integrated fixtures with no optic lens/beam changes Modular LED engines with no optic lens/beam changes Modular LED engines with adjustability in terms of optic lens changes/beam spread Modular LED engines (touch connection) with adjustability in terms of optic lens changes Fixture and accessories that all connection points are QC threading
Essential Series	
Select Series	
Deco Series	
Mega	
Quick Connect	

Accessory Guide

Material		Series/Size		Compatibility		Item Type		Existing Item IDs	Finish
A	Aluminum	QC	Quick Connect	N	Nano	MNT	Mount	3 Number Digits	Aluminum
B	Brass	SD	1/2" Threading	M	Micro	BMNT	Bollard Sized Mount		BKBlack Powdr Coat Bronze Powder Coat
G	Glass	CAT	Catenary System	Z	Macro	JBX	J-Box		BZ
P	Plastic	ARC	LumienARC	U	Universal QC	STM-	Riser		Brass
SS	Stainless Steel	FGO	LumienFUEGO	DZ	Deco/Macro	BSTM-	Bollard Riser		A
PVC	PVC	ACE	LumienACE	MZ	Micro/Macro	SHR	Shroud		BK
RUB	Rubber	VIBE	LumienVIBE	MN	Micro/Nano	PKG	Accessory Package		RCRaw w/ Clear Coat
SIL	Silicone	DCO	Deco Series			WIRE	Wire Lead		Glass
PB	Plastic & Brass	MGA	Mega Series			ADP	Adapter		F
		ESL	Essential Series			MKR	Recessed/Marker		C
		SDQC	1/2" Threaded/Quick Connect Adapter			KNL	Articulating Knuckle		MVMecury Vapor
		(blank)	Multi-Use or SD w/Module Capability			ROD	Glass Rod		Plastic
						STK	Ground Stake		BK
						OPT	Optic Lens		LumienACE
						HEX	Hex Louver		WH

Accessory Guide Continued

Material		Series/Size		Compatibility		Item Type		Existing Item IDs	Finish
A	Aluminum	QC	Quick Connect	N	Nano	PEN	Pendant Wire	3 Number Digits	Aluminum
B	Brass	SD	1/2" Threading	M	Micro	CAP	Pathlight Cap/ Bollard Cap/Cap Closure		BKBlack Powdr Coat Bronze Powder Coat
G	Glass	CAT	Catenary System	Z	Macro	SOF	Soffit Bracket		BZ
P	Plastic	ARC	LumienARC	U	Universal QC	SHD	Shade		Brass
SS	Stainless Steel	FGO	LumienFUEGO	DZ	Deco/Macro	WLT	Well Light		A
PVC	PVC	ACE	LumienACE	MZ	Micro/Macro	GLF	Golf Cup		BK
RUB	Rubber	VIBE	LumienVIBE	MN	Micro/Nano	RNG	Set Ring/Threaded Pendant Ring		RCRaw w/ Clear Coat
SIL	Silicone	DCO	Deco Series			NUT	Lock Nut/Screw		Glass
PB	Plastic & Brass	MGA	Mega Series			LVR	Louvered		F
		ESL	Essential Series			CNX	Connector		C
		SDQC	1/2" Threaded/Quick Connect Adapter			GCP -	Ground Cover Plate		MVMecury Vapor
		(blank)	Multi-Use or SD w/Module Capability			Catenary			Plastic
						HUB	Hub		BK
						EXT	Power Extension		LumienACE
						PFD	Power Feed		WH
						JPR	Jumper		
						CAP	End Cap		
						PEN	Pendant Wire		

Precisely Brilliant

Info@LumienLighting.com
770 485 9002

[LumienLighting.com](https://lumienlighting.com)

LUMIEN 