


B-LINE hand held plate bevelling and deburring machines


										
B2 AIR	B3	B10 ELECTRA (without the milling head)	B15 ELECTRA (without the milling head)	B15 AIR (without the milling head)	B-Dock (without bevelling machine)	Xpipe Beveler (without bevelling machine)	B15 INOX (without the milling head)	B15 INOX set (without the milling head)	B22 ZERO	
Art. Nr. 24200 24220 (NG)	28211 (110V)	25301 (110V)	25251 (110V)	27220S	25350	25500	26251 (110V)	26255 (110V)	29221 (110V)	
 pneumatic	electric	electric	electric	pneumatic	accessory for B10 Electra / B15 Electra	accessory for B10 Electra / B15 Electra / B15 AIR	electric	electric	electric	
 0.08" / 2 mm	0.12" / 3 mm	0.4" / 10 mm	0.6" / 15 mm	0.6" / 15 mm	0.2" / 5 mm	0.6" / 15 mm	0.6" / 15 mm	0.6" / 15 mm	0.8" / 20 mm	
 45°	30° - 60°	30°, 37,5°, 45°, 50°, 60°	30°, 37,5°, 45°, 50°, 60°	30°, 37,5°, 45°, 50°, 60°	30°, 37,5°, 45°, 50°, 60°	30°, 37,5°, 45°, 60°	30°, 37,5°, 45°, 50°, 60°	30°, 45°, 60°	0° - 60° (Facing!)	
 R 0.05" / 1.5 mm	-	R 0.10" / 2.5 mm R 0.14" / 3.5 mm R 0.16" / 4 mm	R 0.10" / 2.5 mm R 0.14" / 3.5 mm R 0.16" / 4 mm	R 0.10" / 2.5 mm R 0.14" / 3.5 mm R 0.16" / 4 mm	R 0.10" / 2.5 mm R 0.14" / 3.5 mm R 0.16" / 4 mm	R 0.10" / 2.5 mm R 0.14" / 3.5 mm R 0.16" / 4 mm	R 0.10" / 2.5 mm R 0.14" / 3.5 mm R 0.16" / 4 mm	R 0.10" / 2.5 mm R 0.14" / 3.5 mm R 0.16" / 4 mm	-	
 0.88 lb / 400 g	68 lb / 31 kg	13.2 lb / 6 kg	20.9 lb / 9.5 kg	16.5 lb / 7.5 kg	62 lb / 28 kg	18.5 lb / 8.4 kg	23.1 lb / 10.5 kg	41.33 lb / 18.75 kg	20.9 lb / 9.5 kg	
										

UZ-LINE plate bevelling machines with automatic feeding

							
UZ12 ULTRALIGHT Single and Double Bevel	UZ18 HARDWORKER Single and Double Bevel	3D manipulator Accessory for Bevelers UZ12 Ultralight, UZ15 Rapid, UZ 18 Hardworker	UZ29 SPEEDER Single and Double Bevel	UZ30 EXPRESS Single and Double Bevel	UZ47 SKILLMASTER Single and Double Bevel, J-Bevel, Facing, Cladding Removal, Angle over 70°	UZ50 TRIUMPH Single and Double Bevel	UZ100 BOLD Single and Double Bevel, J-Bevel, Facing, Cladding Removal, Angle over 70°
Art. Nr. 1818 (480V) 1912 (3x220V)	1981 (480V) 1982 (3x220V)	1930	1903 (480V) 1907 (3x220V)	25997 (480V) 25998 (3x220V)	4702 (480V) 4701(3x220V)	1952 (480V) 1953 (3x220V)	1002 (480V) 1001 (3x220V)
 electric	electric	accessory for UZ12, UZ15, UZ18	electric	electric	electric	electric	electric
 0.5" / 12 mm	0.7" / 18 mm	-	1.14" / 29 mm	1.18" / 30 mm	1.87" / 47 mm	2.44" / 62 mm	3.93" / 100 mm
 22,5° , 30° , 37,5° , 45° , 50°	15° - 50°	-	22,5° , 30° , 37,5° , 45° , 50°	30° - 60°	0° - 90°	15° - 60°	0° - 90°
 5.9 ft/min. / 1.8 m/min.	6.23 ft/min. / 1.9 m/min.	-	5.9 ft/min. / 1.8 m/min.	1.96 - 11.5 ft/min. / 0.6 - 3.5 m/min.	0 - 4.59 ft/min. / 0 - 1.4 m/min.	0 - 3.93 ft/min. / 0 - 1.2 m/min.	0 - 3.28 ft/min. / 0 - 1 m/min.
 66 lb / 30 kg	242.5 lb / 110 kg	187 lb / 85 kg	628 lb / 285 kg	881.8 lb / 400 kg	540 lb / 245 kg	551 lb / 250 kg	1012 lb / 459 kg
							



HIGH SPEED BEVELLING

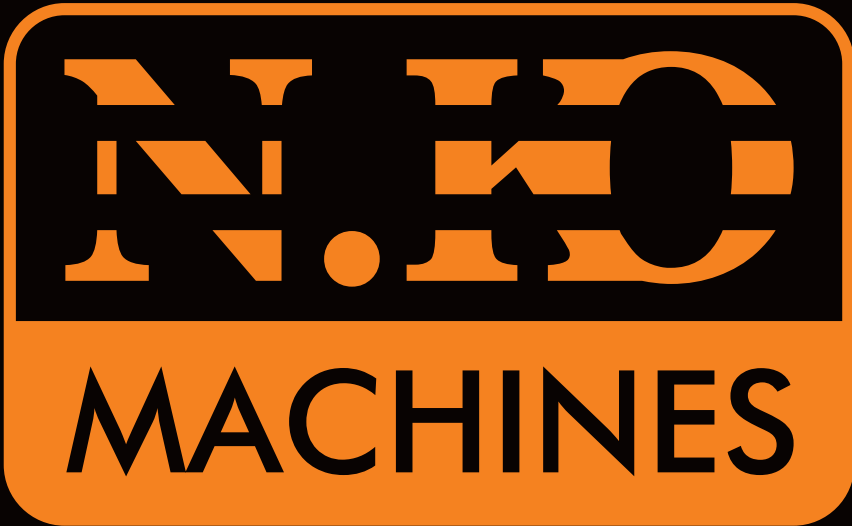

www.bevelerusa.com

Beveler USA Inc.
a Member of Richtr Group
Business Office, Workshop, Warehouse
511 Parkway View Dr,
Pittsburgh, PA 15205, USA

info@bevelerusa.com
www.bevelerUSA.com
English: 1-800-973-1138
Spanish: (+34)900953423
Portuguese: (+351)210202803



PIPE LINE - Inside Clamping

bevelling machines

NEW



	TWISTER 2	STINGER 28E	STINGER 76E	STINGER 120E	STINGER 159E	STINGER 240E	STINGER 240EA	STINGER 300E	STINGER 330E	STINGER 330EA	STINGER 426E	STINGER 426EA	STINGER 600E	STINGER 600EA	STINGER 830E	STINGER 830EA
Art. Nr.	30° - 27200 37.5° - 27201 / 45° - 27202	30052 (120V) 30011 (230V)	30053 (120V) 30012 (230V)	30054 (120V) 30013 (230V)	30055 (120V) 30014 (230V)	30056 (120V) 30015 (230V)	30057 (120V) 30016 (230V)	30004 (120V) 30002 (230V)	30058 (120V) 30017 (230V)	30059 (120V) 30018 (230V)	30060 (120V) 30019 (230V)	30061 (120V) 30020 (230V)	30062 (120V) 30021 (230V)	30063 (120V) 30022 (230V)	30064 (120V) 30029 (230V)	30065 (120V) 30030 (230V)
	Tool for B10 / B15 Electra	electric (1200W)	electric (1200W)	electric (1200W)	electric (1500W)	electric (2000W)	electric (2000W)	electric (1800W)	electric (2000W)	electric (2000W)	electric (2400W)	electric (2400W)	electric (2400W)	electric (2400W)	electric (2400W)	electric (2400W)
	ID 0.76" - OD 2.75" ID 19.5 mm - OD 70 mm	ID 0.7" - 1.1" / OD max. 1.96" ID 18 - 28 mm / OD max. 50 mm	ID 1.1" - 2.99" / OD max. 3.5" ID 28 - 76 mm / OD max. 89 mm	ID 1.57" - 4.72" / OD max. 4.96" ID 40 - 120 mm / OD max. 126 mm	ID 2.55" - 6.25" / OD max. 6.61" ID 65 - 159 mm / OD max. 168 mm	ID 3.14" - 9.44" / OD max. 10.74" ID 80 - 240 mm / OD max. 273 mm	ID 3.14" - 9.44" / OD max. 10.74" ID 80 - 240 mm / OD max. 273 mm	ID 1.41" - 10.59" / OD max. 10.59" ID 36 - 269 mm / OD max. 269 mm	ID 5.9" - 12.99" / OD max. 13.97" ID 150 - 330 mm / OD max. 355 mm	ID 5.9" - 12.99" / OD max. 13.97" ID 150 - 330 mm / OD max. 355 mm	ID 9.84" - 16.73" / OD max. 16.73" ID 250 - 426 mm / OD max. 426 mm	ID 9.84" - 16.73" / OD max. 17.99" ID 250 - 426 mm / OD max. 457 mm	ID 11.81" - 23.62" / OD max. 24.8" ID 300 - 600 mm / OD max. 630 mm	ID 11.81" - 23.62" / OD max. 24.8" ID 300 - 600 mm / OD max. 630 mm	ID 23.62" - 32.67" / OD max. 33.46" ID 600 - 830 mm / OD max. 850 mm	ID 23.62" - 32.67" / OD max. 33.46" ID 600 - 830 mm / OD max. 850 mm
	≤0.59" / 15 mm	≤0.59" / 15 mm	≤0.59" / 15 mm	≤0.59" / 15 mm	≤0.78" / 20 mm	≤0.78" / 20 mm	≤2.95" / 75 mm	≤0.59" / 15 mm	≤0.78" / 20 mm	≤2.95" / 75 mm	≤0.78" / 20 mm	≤2.95" / 75 mm	≤0.78" / 20 mm	≤2.95" / 75 mm	≤0.78" / 20 mm	≤2.95" / 75 mm
	0.99 lb / 450 g	22 lb / 10 kg	22 lb / 10 kg	39 lb / 18 kg	55 lb / 25 kg	77 lb / 35 kg	45 kg / 99 lb	80.6 lb / 36.6 kg	114 lb / 52 kg	132 lb / 62 kg	199 lb / 90 kg	236 lb / 107 kg	253 lb / 115 kg	242.5 lb / 110 kg	401 lb / 182 kg	485 lb / 220 kg

PIPE LINE - Outside Clamping

NEW



	Xpipe Beveler (without bevelling machine)	C-BITER 63E	C-BITER 76E	C-BITER 89E	C-BITER 114E	PHYTON 63ESC	PHYTON 114ESC	PHYTON 89ES	PHYTON 168ES	PHYTON 230ES	PHYTON 275ES	PHYTON 305ES	PHYTON 325ES	PHYTON 377ES	PHYTON 426ES	PHYTON 457ES
Art. Nr.	25500	30025(230V)	30026 (230V)	30047 (230V)	30048 (230V)	30027 (230V)	30028 (230V)	30066 (120V) 30031 (230V)	30067 (120V) 30023 (230V)	30068 (120V) 30032 (230V)	30069 (120V) 30033 (230V)	30070 (120V) 30024 (230V)	30071 (120V) 30034 (230V)	30072 (120V) 30035 (230V)	30073 (120V) 30036 (230V)	30074 (120V) 30037 (230V)
	Accessory for B10 / B15 Electra	electric (1300W)	electric (1300W)	electric (1300W)	electric (1300W)	electric (1300W)	electric (1300W)	electric (1500W)	electric (2000W)	electric (2000W)	electric (2000W)	electric (2000W)	electric (2000W)	electric (2000W)	electric (2000W)	electric (2000W)
	≥3.36" / 85 mm	OD 1.25" - 2.48" OD 32 - 63 mm	OD 1.65" - 2.99" OD 42 - 76 mm	OD 2.67" - 3.50" OD 63 - 89 mm	OD 2.99" - 4.48" OD 76 - 114 mm	OD 2.24" - 4.48" OD 14 - 63 mm	OD 2.24" - 4.48" OD 57 - 114 mm	OD 0.55" - 2.48" OD 14 - 63 mm	OD 0.98" - 3.50" OD 25 - 89 mm	OD 3.14" - 9.05" OD 80 - 230 mm	OD 4.92" - 10.82" OD 125 - 275 mm	OD 5.9" - 12" OD 150 - 305 mm	OD 6.61" - 12.79" OD 168 - 325 mm	OD 8.62" - 14.84" OD 219 - 377 mm	OD 10.74" - 16.77" OD 273 - 426 mm	OD 11.81" - 17.99" OD 300 - 457 mm
	≤0.59" / 15 mm	/	/	/	/	≤0.47" / 12 mm	≤0.47" / 12 mm	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)
	18.5 lb / 8.4 kg	19.8 lb / 9 kg	22 lb / 10 kg	30.8 lb / 14 kg	33 lb / 15 kg	28.6 lb / 13 kg	37.4 lb / 17 kg	61.7 lb / 28 kg	110.2 lb / 50 kg	116.8 lb / 53 kg	123.4 lb / 56 kg	138.8 lb / 63 kg	143.3 lb / 65 kg	149.9 lb / 68 kg	165.3 lb / 75 kg	176.3 lb / 80 kg



	PHYTON 508ES	PHYTON 560ES	PHYTON 610ES	PHYTON 630ES	PHYTON 660ES	PHYTON 715ES	PHYTON 762ES	PHYTON 830ES	PHYTON 914ES
Art. Nr.	30075 (120V) 30038 (230V)	30076 (120V) 30039 (230V)	30077 (120V) 30040 (230V)	30078 (120V) 30041 (230V)	30079 (120V) 30042 (230V)	30080 (120V) 30043 (230V)	30081 (120V) 30044 (230V)	30082 (120V) 30045 (230V)	30083 (120V) 30046 (230V)
	electric (2400W)	electric (2400W)	electric (2400W)	electric (2400W)	electric (2400W)	electric (2400W)	electric (2400W)	electric (2400W)	electric (2400W)
	OD 13.97" - 20" OD 355 - 508 mm	OD 15.74" - 22.04" OD 400 - 560 mm	OD 17.99" - 24.01" OD 457 - 610 mm	OD 18.89" - 24.80" OD 480 - 630 mm	OD 20" - 25.98" OD 508 - 660 mm	OD 22.04" - 28.14" OD 560 - 715 mm	OD 23.62" - 30" OD 600 - 762 mm	OD 25.98" - 32" OD 660 - 813 mm	OD 30" - 35.98" OD 762 - 914 mm
	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)	≤1.18" / 30 mm (3.14" / 80 mm)
	224.8 lb / 102 kg	242.5 lb / 110 kg	253.5 lb / 115 kg	264.5 lb / 120 kg	277.7 lb / 126 kg	304.2 lb / 138 kg	330.6 lb / 150 kg	348.3 lb / 158 kg	392.4 lb / 178 kg

G-LINE Mobile Belt Grinder



Art. Nr.	13001 (480V)		3000 W
	2.95" / 75 mm		154.3 lb / 70 kg
	78.74" / 2000 mm		
	98.43 ft/s / 30 m/s		