



INDUSTRIAL DUCTING HOSE

by Kuriyama



Kuriyama of America, Inc.

EDITION 0417

Index of Products by Series

Accessories Compatibility Chart	25
Application Guide	5
CG™ Series	13
Chemical Resistance Chart.....	27
Compliance Footnotes.....	26
Couplings and Accessories.....	24
EDB™ Series	20–21
EDW™ Series	20–21
Features & Advantages Catalog Icon Guide.....	4
Features & Advantages Guide by Hose Series.....	5
GT™ Series	14
GTF™ Series	15
GTFE™ Series.....	15
GTG™ Series	14
HTNP2 Series	18
HTS4000 Series	22–23
LK™ Series.....	16
LKC™ Series.....	16
SDH Series ... 	19
Table of Contents	3
TMOD Series	17
URE-BK™ Series ... 	7
URE-CL™ Series ... 	6
UREH-CL™ Series ... 	8
UV1™ Series.....	11
UV2™ Series.....	9
UVE™ Series ... 	11
UVF™ Series	10
VID-CL™ Series ... 	12

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

Table of Contents

Index	2
Application Guide	5
Features & Advantages Catalog Icon Guide.....	4
Features & Advantages Guide by Hose Series.....	5

Polyurethane (TPU) Ducting Hoses

Urevac™ UV1™ Series	11
Urevac™ UV2™ Series	9
Urevac™ Food UVF™ Series	10
Urevac™ UVE™ Series NEW	11
Urevent™ Black URE-BK™ Series NEW	7
Urevent™ Clear URE-CL™ Series NEW	6
Urevent™ Heavy Duty Clear UREH-CL™ Series NEW	8

PVC & TPR Ducting Hoses

CG™ Series	13
GT™ Series	14
GTF™ Series	15
GTFE™ Series.....	15
GTG™ Series	14
Lawn King™ LK™ Series	16
Lawn King™ LKC™ Series	16
Thermo-Duct™ TMOD Series	17
Vinylduct™ Clear VID-CL™ Series NEW	12

PP, Neoprene, Silicone & Metal Ducting Hoses

Extendo-Duct® EDB™ Series	20–21
Extendo-Duct® EDW™ Series	20–21
HT4000 Series	22–23
Neo-Duct® HTNP2 Series.....	18
SIL-Duct® SDH Series NEW SIZES	19

Accessories Compatibility Chart	25
Cautionary Statement & Limited Warranty	Back Cover
Chemical Resistance Chart.....	27
Compliance Footnotes.....	26
Couplings and Accessories.....	24

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

Features & Advantages Catalog Icon Guide



Abrasion Resistant – Indicates hoses designed to help resist internal wear caused by the transfer of abrasive materials.



“Cold-Flex” Materials – Indicates hoses designed to remain flexible in sub-zero temperatures.



Easy Slide – Indicates hoses with an external rigid helix designed to slide easily over rough surfaces. Easy-to-handle.



Food Grade – Indicates hoses which comply with applicable FDA requirements for food contact. Several of these hoses also meet USDA and 3-A requirements.



High Temp Materials – Indicates hoses designed for use at temperatures of 250°F (121°C) or above.



Oil Resistant – Indicates hoses which exhibit resistance to animal, vegetable and petroleum based oils.



Static Dissipative – Indicates hoses formulated with static dissipative compounds, or hoses containing a grounding wire, to help prevent the build-up of static electricity.



Transparent Construction – Indicates hoses with a transparent or semi-transparent tube. These hoses allow the user visual confirmation of material flow, and the ability to see if material or condensation has collected in the hose tube.



Water – Indicates hoses which can be used for freshwater and saltwater transfer.

Features & Advantages Guide by Hose Series



ABRASION
RESISTANT



"COLD-FLEX"
MATERIALS



EASY SLIDE



FOOD
GRADE



HIGH-TEMP
MATERIALS



OIL
RESISTANT



STATIC
DISSIPATIVE



TRANSPARENT
CONSTRUCTION



WATER

	AR	"COLD-FLEX"	EASY SLIDE	FOOD GRADE	HIGH-TEMP	OIL RESISTANT	STATIC DISSIPATIVE	TRANSPARENT CONSTRUCTION	WATER
CG			X					X	X
EDB/EDW							X		
GT/GTG			X					X	X
GTF/GTFE			X	X			X	X	X
HT4000	X		X	X	X		X		
HTNP2	X	X			X		X		
LK/LKC	X	X	X					X	X
SDH		X			X		X		
TMOD		X			X		X		X
UV1/UEVE	X	X	X			X	X	X	
UV2	X	X	X			X	X	X	
URE-BK	X	X				X	X		X
URE-CL	X	X		X		X	X	X	X
UREH-CL	X	X		X		X	X	X	X
UVF	X	X	X	X		X		X	
VID-CL		X		X			X	X	X

Application Guide

APPLICATION	TPU HOSES						PVC & TPR HOSES						MISC. HOSES			
	URE-BK	URE-CL	UREH-CL	UV1/UEVE	UV2	UVF	CG/CG-SL	GTF/GTFE	GT/GTG	LK	TMOD	VID-CL	EDB/EDW	HTNP2	SDH	HT4000
Cable and hose bundle protection							✓		✓	✓						✓
Drain lines							✓	✓	✓							
Ducting, ventilation & fume removal	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Dust control	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Food grade material handling		✓	✓			✓		✓				✓				✓
High temperature air handling											✓			✓	✓	✓
Insulation blowing	✓	✓		✓				✓	✓							
Lavatory waste disposal	✓	✓														
Lawn and leaf collection	✓	✓	✓	✓					✓	✓		✓				
Material handling - standard duty	✓	✓	✓	✓	✓	✓										✓
Material handling - light duty	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		✓		✓
Mulch, bark, wood chips & other surfacing materials										✓						
Oil mist venting	✓	✓	✓	✓	✓	✓										
Pharmaceutical product transfer		✓	✓			✓		✓								
Plastic process driers															✓	✓
Plastic processing equipment	✓	✓	✓	✓		✓										
Street and parking lot sweepers	✓	✓	✓													
Woodworking/Furniture dust & chip control	✓	✓	✓		✓				✓		✓	✓				

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

KFDHCA0417



ABRASION
RESISTANT



"COLD-FLEX"
MATERIALS



FOOD
GRADE



OIL
RESISTANT



STATIC
DISSIPATIVE



TRANSPARENT
CONSTRUCTION



WATER

Urevent™ Clear URE-CL™ Series

Food Grade Polyurethane Ducting/Material Handling Hose

General Applications:

- Concrete resurfacing dust collection
- Ducting, ventilation & fume removal
- Dust control
- Food grade material handling
- Insulation blowing
- Lavatory waste disposal
- Material handling – standard duty
- Oil mist collection
- Pharmaceutical product transfer
- Woodworking/furniture dust & chip control

Construction: Ether polyurethane (TPU) hose with steel wire helix.

Service Temperature: -65°F (-54°C) to 225°F (107°C);
intermittent service to 250°F (121°C)*

Features and Advantages:

- **Durable & Lightweight Polyurethane Material** – Designed for wet or dry applications where abrasion is a factor. Provides longer hose life and lower operating costs versus similar rubber or PVC hoses.
- **Steel Wire Helix** – Provides strength and allows for use at higher temperatures without risk of hose deformation. Wire can be grounded for static dissipation. ⚡
- **Food Grade Material** – Hose complies with applicable FDA requirements. Phthalate free.
- **Transparent Construction** – “See-the-flow”. Allows for visual confirmation of material flow.
- **“Cold-Flex” Material** – Hose remains flexible in sub-zero temperatures.
- **Oil Resistant Polyurethane** – Resists most animal and petroleum based oils.



Nominal Specifications

Series	ID		OD		Working Pressure (PSI) @ 68° F	Vacuum Rating (in Hg) @ 68°F	Min. Bending Radius (in.) @ 68°F	Compression Ratio	Length/Ctn. (ft.)	Weight (lbs/ft)
	(in.)	(mm)	(in.)	(mm)						
URE-CL200	2	50.8	2.23	56.6	31	29	2	3:1	25	0.36
URE-CL250	2 1/2	63.5	2.73	69.3	31	29	2	3:1	25	0.40
URE-CL300	3	76.2	3.23	82.0	30	29	2.5	3:1	25	0.44
URE-CL400	4	101.6	4.28	108.7	26	22	3.5	3:1	25	0.62
URE-CL500	5	127.0	5.28	134.1	22	21	4.5	3:1	25	0.65
URE-CL600	6	152.4	6.33	160.8	20	19	5.5	3:1	25	0.84
URE-CL800	8	203.2	8.33	211.6	14	14	7	3:1	25	1.40
URE-CL1000	10	255.0	10.33	262.4	11	6	8	3:1	25	1.93
URE-CL1200	12	304.8	12.33	313.2	10	5	9	3:1	25	2.26

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

*Actual service temperature range is application dependent

⚡ **CAUTION:** This product is designed to dissipate static electricity when the metal wire is physically extracted and securely connected to ground, through the fitting or by other means.

BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, PHthalate FREE⁽⁰⁵⁾, RoHS⁽⁰⁶⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



ABRASION
RESISTANT



"COLD-FLEX"
MATERIALS



OIL
RESISTANT



STATIC
DISSIPATIVE



WATER

FLEXAIR™



Urevent™ Black URE-BK™ Series Polyurethane Ducting/Material Handling Hose

General Applications:

- Concrete resurfacing dust collection
- Ducting, ventilation & fume removal
- Dust control
- Insulation blowing
- Lavatory waste disposal
- Material handling – standard duty
- Oil mist collection
- Woodworking/furniture dust & chip control

Construction: Ether polyurethane (TPU) hose with steel wire helix.

Service Temperature: -65°F (-54°C) to 225°F (107°C); intermittent service to 250°F (121°C)*

Features and Advantages:

- **Durable & Lightweight Polyurethane Material** – Designed for wet or dry applications where abrasion is a factor. Provides longer hose life and lower operating costs versus similar rubber or PVC hoses.
- **Steel Wire Helix** – Provides strength and allows for use at higher temperatures without risk of hose deformation. Wire can be grounded for static dissipation. ⚡

- **"Cold-Flex" Material** – Hose remains flexible in sub-zero temperatures.
- **Oil Resistant Polyurethane** – Resists most animal and petroleum based oils.

Nominal Specifications

Series	ID		OD		Working Pressure (PSI) @ 68° F	Vacuum Rating (in Hg) @ 68°F	Min. Bending Radius (in.) @ 68°F	Compression Ratio	Length/Ctn. (ft.)	Weight (lbs/ft)
	(in.)	(mm)	(in.)	(mm)						
URE-BK200	2	50.8	2.23	56.6	31	29	2	3:1	25	0.36
URE-BK250	2 1/2	63.5	2.73	69.3	31	29	2	3:1	25	0.40
URE-BK300	3	76.2	3.23	82.0	30	29	2.5	3:1	25	0.44
URE-BK400	4	101.6	4.28	108.7	26	22	3.5	3:1	25	0.62
URE-BK500	5	127.0	5.28	134.1	22	21	4.5	3:1	25	0.65
URE-BK600	6	152.4	6.33	160.8	20	19	5.5	3:1	25	0.84
URE-BK800	8	203.2	8.33	211.6	14	14	7	3:1	25	1.40
URE-BK1000	10	255.0	10.33	262.4	11	6	8	3:1	25	1.93
URE-BK1200	12	304.8	12.33	313.2	10	5	9	3:1	25	2.26

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

*Actual service temperature range is application dependent

⚡ **CAUTION:** This product is designed to dissipate static electricity when the metal wire is physically extracted and securely connected to ground, through the fitting or by other means.

RoHS(06)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

KFDHCA0417

Urevent™ HD Heavy Duty Clear UREH-CL™ Series Heavy Duty, Food Grade Polyurethane Ducting/Material Handling Hose



General Applications:

- Concrete resurfacing dust collection
- Ducting, ventilation & fume removal
- Dust control
- Food grade material handling
- Material handling – standard duty
- Pharmaceutical product transfer
- Woodworking/furniture dust & chip control

Construction: Ether polyurethane (TPU) hose with steel wire helix.

Service Temperature: -65°F (-54°C) to 225°F (107°C); intermittent service to 250°F (121°C)*

Features and Advantages:

- **Durable & Lightweight Polyurethane Material** – Designed for wet or dry applications where abrasion is a factor. Provides longer hose life and lower operating costs versus similar rubber or PVC hoses.
- **Steel Wire Helix** – Provides strength and allows for use at higher temperatures without risk of hose deformation. Wire can be grounded for static dissipation. ⚡
- **Food Grade Material** – Hose complies with applicable FDA requirements. Phthalate free.
- **Transparent Construction** – “See-the-flow”. Allows for visual confirmation of material flow.
- **“Cold-Flex” Material** – Hose remains flexible in sub-zero temperatures.
- **Oil Resistant Polyurethane Tube** – Resists most animal and petroleum based oils.



Nominal Specifications

Series	ID		OD		Working Pressure (PSI) @ 68° F	Vacuum Rating (in Hg) @ 68°F	Min. Bending Radius (in.) @ 68°F	Compression Ratio	Length/Ctn. (ft.)	Weight (lbs/ft)
	(in.)	(mm)	(in.)	(mm)						
UREH-CL400	4	101.6	4.32	109.73	33	25	4	2:1	25	0.73
UREH-CL500	5	127.0	5.32	135.13	31	22	5	2:1	25	0.84
UREH-CL600	6	152.4	6.37	161.80	29	21	6	2:1	25	1.20
UREH-CL800	8	203.2	8.37	212.60	22	16	7.5	2:1	25	1.67
UREH-CL1000	10	255.0	10.37	263.40	21	9	9	2:1	25	2.03
UREH-CL1200	12	304.8	12.23	310.64	16	7	10	2:1	25	2.47

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

*Actual service temperature range is application dependent

⚡ **CAUTION:** This product is designed to dissipate static electricity when the metal wire is physically extracted and securely connected to ground, through the fitting or by other means.

BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, PHthalate FREE⁽⁰⁵⁾, RoHS⁽⁰⁶⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



**ABRASION
RESISTANT**



**"COLD-FLEX"
MATERIALS**



EASY SLIDE



**OIL
RESISTANT**



**STATIC
DISSIPATIVE**



**TRANSPARENT
CONSTRUCTION**



Urevac™ 2

UV2™ Series

Heavy Duty Polyurethane Lined Ducting/Material Handling Hose

General Applications:

- Agricultural dry fertilizer
- Air seeder lines
- Dust control
- Material handling – standard duty
- Wand hose

Construction: PVC cover with ester polyurethane (TPU) liner and rigid PVC helix.

Service Temperature: -40°F (-40°C) to 150°F (+65°C)*

Features and Advantages:

- **Abrasion Resistant Polyurethane Liner** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus similar rubber or PVC hoses.
- **"Cold-Flex" Materials** – Hose remains flexible in sub-zero temperatures.
- **Static Dissipative Cover** – Specially formulated to help prevent the build-up of static electricity for added safety and to help keep material flowing smoothly.
- **Transparent Construction** – "See-the-flow." Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

Nominal Specifications

Series	ID		OD		Working Pressure (PSI)		Vacuum Rating (in Hg)		Min. Bending Radius (in.) @ 68°F	Standard Length (ft.)	Weight (lbs/ft)
	(in.)	(mm)	(in.)	(mm)	68°F	104°F	68°F	104°F			
UV2-150	1 1/2	38.1	1.87	47.5	25	10	22	16	1.5	60	0.29
UV2-200	2	50.8	2.47	62.7	25	10	21	14	2.5	60	0.40
UV2-250	2 1/2	63.5	2.96	75.2	20	8	19	12	3	60	0.53
UV2-300	3	76.2	3.54	89.8	20	8	18	11	4	60	0.67
UV2-400	4	101.6	4.57	116.1	15	7	13	9	6	60	1.02
UV2-500	5	127.0	5.58	141.7	15	7	10	7	8	60	1.22
UV2-600	6	152.4	6.62	168.1	10	5	7	5	10	60	1.68
UV2-800	8	203.2	8.67	220.2	10	5	5	3	14	20	2.24

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

*Actual service temperature range is application dependent.

RoHS(06)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

KFDHCA0417



ABRASION
RESISTANT



"COLD-FLEX"
MATERIALS



EASY SLIDE



FOOD
GRADE



OIL
RESISTANT



TRANSPARENT
CONSTRUCTION

Urevac™ Food UVF™ Series


Food Grade Polyurethane Ducting/Material Handling Hose

General Applications:

- Ducting, ventilation and fume removal
- Dust collection
- Food grade blower and ducting systems
- Food grade material handling – standard duty
- Pharmaceutical product transfer

Construction: Ester polyurethane (TPU) tube with rigid PVC helix.

Service Temperature: -40°F (-40°C) to 150°F (+65°C)*

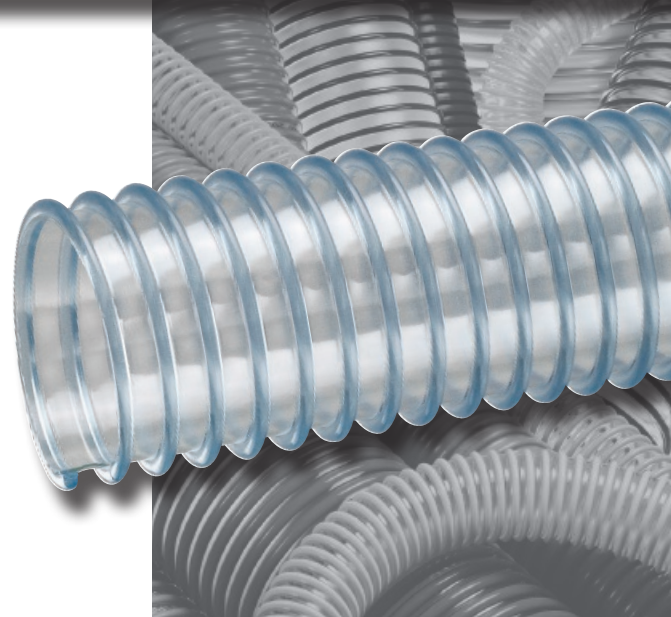

Features and Advantages:

- **Durable Lightweight Polyurethane Tube** – Designed for dry applications where abrasion is a factor. Provides longer hose life and lower operating costs versus similar rubber or PVC hoses.
- **Food Grade Materials** – Hose complies with applicable FDA⁽⁰⁴⁾ requirements. Hose approved by USDA⁽¹²⁾ for use in meat and poultry plants. Phthalate free.
- **Transparent Construction** – “See-the-flow”. Allows for visual confirmation of material flow.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Easy Slide Helix** – Exposed rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Oil Resistant Polyurethane Hose** – Resists most animal and petroleum based oils.

Nominal Specifications

Series	ID		OD		Working Pressure (PSI)		Vacuum Rating (in. Hg)		Min. Bending Radius (in.) @ 68°F	Standard Length (ft.)	Weight (lbs/ft)
	(in.)	(mm)	(in.)	(mm)	68°F	104°F	68°F	104°F			
UVF150	1 1/2	38.1	1.82	46.2	20	7	22	14	1	50	0.23
UVF200	2	50.8	2.39	60.7	15	6	21	12	1.5	50	0.32
UVF250	2 1/2	63.5	2.89	73.4	10	5	19	10	1.5	50	0.39
UVF300	3	76.2	3.46	87.9	10	5	18	10	2.5	50	0.55
UVF400	4	101.6	4.50	114.3	8	4	13	8	3	50	0.77
UVF500	5	127.0	5.50	139.7	7	3	10	7	4	50	0.89
UVF600	6	152.4	6.54	166.1	6	3	7	5	5	50	1.15
UVF800	8	203.2	8.59	218.1	4	2	5	3	7	50/20	1.75

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

*Actual service temperature range is application dependent.

BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, PHthalate Free⁽⁰⁵⁾, RoHS⁽⁰⁶⁾, USDA⁽⁰⁸⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



**ABRASION
RESISTANT**



**"COLD-FLEX"
MATERIALS**



EASY SLIDE



**OIL
RESISTANT**



**STATIC
DISSIPATIVE**



**TRANSPARENT
CONSTRUCTION**



UV1

UVE



Urevac™ 1

UV1™ Series

**Polyurethane Ducting/
Material Handling Hose**

UVE™ Series

**Polyurethane Ducting/
Material Handling Hose With
Grounding Wire**

General Applications:

- Concrete resurfacing dust collection
- Ducting, ventilation and fume removal
- Dust collection
- Insulation blowing
- Material chutes
- Material handling – standard duty

Construction: Ester polyurethane (TPU) tube with rigid PVC helix.

Service Temperature: -40°F (-40°C) to 150°F (+65°C)*

Features and Advantages:

- **Durable Lightweight Polyurethane Tube** – Designed for dry applications where abrasion is a factor. Provides longer hose life and lower operating costs versus rubber or PVC hoses.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.

- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Oil Resistant Polyurethane Tube** – Resists most animal and petroleum based oils.
- **Grounding Wire (UVE only)** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It’s embedded within the rigid helix to prevent contamination of transferred materials. ⚡

Nominal Specifications

Series	ID		OD		Working Pressure (PSI)		Vacuum Rating (in. Hg)		Min. Bending Radius (in.) @ 68°F	Standard Length (ft.)	Weight (lbs/ft)
	(in.)	(mm)	(in.)	(mm)	68°F	104°F	68°F	104°F			
UV1-150	1 1/2	38.1	1.82	46.2	20	7	22	14	0.75	50	0.23
UV1/UVE-200	2	50.8	2.39	60.7	15	6	21	12	1.5	100/50	0.32
UV1-250	2 1/2	63.5	2.89	73.4	10	5	19	10	1.5	50	0.39
UV1/UVE-300	3	76.2	3.46	87.9	10	5	18	10	2.5	100/50	0.58
UV1/UVE-400	4	101.6	4.50	114.3	8	4	13	8	3	100/50	0.77
UV1-500	5	127.0	5.50	139.7	7	3	10	7	4	50	0.89
UV1/UVE-600	6	152.4	6.54	166.1	6	3	7	5	5	100/50	1.15
UV1-800	8	203.2	8.59	218.2	4	2	5	3	7	50	1.75

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

*Actual service temperature range is application dependent.

⚡ **CAUTION:** This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

RoHS(06)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

KFDHCA0417

Vinylduct™ Clear VID-CL™ Series

Food Grade PVC Ducting/Material Handling Hose

General Applications:

- Ducting, ventilation & fume removal
- Dust control
- Food grade material handling
- Lawn and leaf collection
- Material handling – light duty

Construction: PVC hose with steel wire helix.

Service Temperature: -20°F (-29°C) to 180°F (82°C)*



Features and Advantages:

- **Steel Wire Helix** – Highly durable steel wire provides strength and allows for use at higher temperatures without risk of hose deformation. Wire can be grounded for static dissipation. ⚡
- **Food Grade Material** – Hose complies with applicable FDA requirements. Phthalate free.
- **Flame Retardant** – Manufactured to meet UL94V-O rating of the Standard for Safety of Flammability of Plastic Material in Devices and Appliances Testing.
- **Transparent Construction** – “See-the-flow”. Allows for visual confirmation of material flow.

Nominal Specifications

Series	ID		OD		Working Pressure (PSI) @ 68° F	Vacuum Rating (in Hg) @ 68°F	Min. Bending Radius (in.) @ 68°F	Compression Ratio	Length/Ctn. (ft.)	Weight (lbs/ft)
	(in.)	(mm)	(in.)	(mm)						
VID-CL200	2	50.8	2.23	56.6	28	29	2	3:1	25	0.36
VID-CL250	2 1/2	63.5	2.73	69.3	24	29	2	3:1	25	0.40
VID-CL300	3	76.2	3.23	82.0	20	26	2.5	3:1	25	0.44
VID-CL400	4	101.6	4.28	108.7	18	22	3.5	3:1	25	0.62
VID-CL500	5	127.0	5.28	134.1	16	21	4.5	3:1	25	0.65
VID-CL600	6	152.4	6.33	160.8	14	19	5.5	3:1	25	0.84
VID-CL800	8	203.2	8.33	211.6	10	14	6.5	3:1	25	1.40
VID-CL1000	10	255.0	10.33	262.4	9	6	7	4:1	25	1.93
VID-CL1200	12	304.8	12.33	313.2	8	5	8.5	4:1	25	2.26

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

*Actual service temperature range is application dependent.

⚡ **CAUTION:** This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, PHTHALATE FREE⁽⁰⁵⁾, RoHS⁽⁰⁶⁾, UL94V-O⁽⁰⁷⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



EASY SLIDE



TRANSPARENT
CONSTRUCTION



WATER



CG™ Series

Light Weight PVC Ducting Hose

General Applications:

- Dust collection
- Ducting, ventilation and fume removal
- Washing machine drain hose

Construction: PVC tube with rigid PVC helix.

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*



Features and Advantages:

- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.

Nominal Specifications

Series	ID		OD		Working Pressure (PSI)		Vacuum Rating (in. Hg)		Min. Bending Radius (in.) @ 68° F	Standard Length (ft.)	Weight (lbs/ft)
	(in.)	(mm)	(in.)	(mm)	68°F	104°F	68°F	104°F			
CG200	2	50.8	2.30	58.4	12	6	10	5	2	100	0.28
CG238	2 3/8	60.3	2.76	70.1	12	6	10	5	2	100	0.38
CG250	2 1/2	63.5	2.81	71.3	10	5	8	4	2	100	0.39
CG300	3	76.2	3.35	85.0	8	4	7	3	3	100	0.45
CG350	3 1/2	88.9	3.83	97.4	8	4	7	3	3	100	0.51
CG400	4	102.4	4.39	111.4	6	3	6	3	3	100	0.64

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

*Actual service temperature range is application dependent.

MSHA⁽⁰⁴⁾, RoHS⁽⁰⁶⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

KFDHCA0417

GT™ Series GTG™ Series

PVC Ducting/Material Handling Hose

General Applications:

- Cable protection
- Drain lines
- Ducting, ventilation and fume removal
- Dust collection
- Material handling – light duty

Construction: PVC tube with rigid PVC helix.

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

GT

GTG



GTG
Anti-Microbial

Features and Advantages:

- **Transparent Construction (GT series only)** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.

- **Anti-Microbial Tube (GTG series only)** – Inhibits growth of bacteria, fungi, mold and yeast.

Nominal Specifications

Series	ID		OD		Working Pressure (PSI)		Vacuum Rating (in. Hg)		Min. Bending Radius (in.) @ 68°F	Standard Length (ft.)	Weight (lbs/ft)
	(in.)	(mm)	(in.)	(mm)	68°F	104°F	68°F	104°F			
GT/GTG150	1 1/2	38.1	1.82	46.2	20	7	22	14	1	100/50	0.23
GT/GTG200	2	50.8	2.39	60.8	15	6	21	12	2	100/50	0.30
GT238	2 3/8	60.6	2.76	70.1	12	6	20	11	2	100	0.38
GT/GTG250	2 1/2	63.5	2.89	73.4	10	5	19	10	2	100/50	0.39
GT/GTG300	3	76.2	3.46	87.9	10	5	18	10	3	100/50	0.50
GT350	3 1/2	88.9	4.02	102.0	9	4	15	8	3	100/50	0.68
GT/GTG400	4	101.6	4.50	114.3	8	4	13	7	3	100/50	0.77
GT500	5	127.0	5.50	139.7	7	3	10	6	5	100/50	0.91
GT600	6	152.4	6.54	166.1	6	3	7	5	6	100/50	1.08
GT800	8	203.2	8.59	218.2	4	2	5	3	8	50	1.74
GT1000	10	254.0	11.68	296.6	2	—	2	—	10	50	2.70

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.


*Actual service temperature range is application dependent.



EASY SLIDE

FOOD
GRADESTATIC
DISSIPATIVETRANSPARENT
CONSTRUCTION

WATER

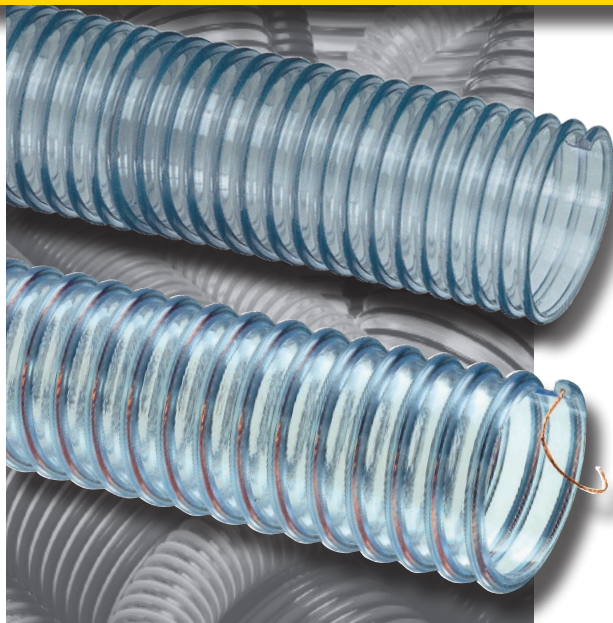

GTF

GTFE



GTF™ Series

Food Grade PVC Ducting/Material Handling Hose

GTFE™ Series

Food Grade PVC Ducting/Material Handling Hose with Grounding Wire

General Applications:

- Ducting, ventilation and fume removal
- Food grade blower and ducting systems
- Material handling – light duty
- Pharmaceutical product transfer

Construction: PVC tube with rigid PVC helix and grounding wire (GTFE Series).

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

Features and Advantages:

- **Food Grade Materials** – Hose complies with applicable FDA⁽⁰³⁾ and 3-A⁽⁰¹⁾ requirements. Hose approved by USDA⁽¹¹⁾ (GTF only) for use in meat and poultry plants. Phthalate free.
- **Grounding Wire (GTFE only)** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials. ⚡
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Exposed rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.

Nominal Specifications

Series	ID		OD		Working Pressure (PSI)		Vacuum Rating (in. Hg)		Min. Bending Radius (in.) @ 68°F	Standard Length (ft.)	Weight (lbs/ft)
	(in.)	(mm)	(in.)	(mm)	68°F	104°F	68°F	104°F			
GTF/GTFE150	1 1/2	38.1	1.82	46.2	20	7	22	14	1	100	0.23
GTF/GTFE200	2	50.8	2.39	60.8	15	6	21	12	2	100	0.30
GTF/GTFE250	2 1/2	63.5	2.89	73.4	10	5	19	10	2	100	0.39
GTF/GTFE300	3	76.2	3.46	87.9	10	5	18	10	3	100/50	0.50
GTF/GTFE400	4	101.6	4.50	114.3	8	4	13	7	3	100/50	0.77
GTF/GTFE600	6	152.4	6.54	166.1	6	3	7	5	6	50	1.08
GTF/GTFE800	8	203.2	8.59	218.2	4	2	5	3	8	50	1.74

NOTE: Service life may vary depending on operating conditions and type of material being conveyed. Not for liquid handling use.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

*Actual service temperature range is application dependent.

⚡ **CAUTION:** This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

3A⁽⁰¹⁾, BSE/TSE⁽⁰²⁾, FDA⁽⁰⁴⁾, PHTHALATE FREE⁽⁰⁵⁾, RoHS⁽⁰⁶⁾, USDA⁽⁰⁸⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



ABRASION
RESISTANT



"COLD-FLEX"
MATERIALS



EASY SLIDE



TRANSPARENT
CONSTRUCTION



WATER

Lawn King™

LK™ Series

LKC™ Series

PVC Ducting/Material Handling Hose

LK

LKC



General Applications:

- Dust collection
- Lawn and leaf collection
- Material handling – light duty

Construction: PVC tube with rigid PVC helix.

Service Temperature: -20°F (-29°C) to 150°F (+65°C)*



Features and Advantages:

- **"Cold-Flex" Materials** – Hose remains flexible in sub-zero temperatures.
- **Transparent Construction (LKC series only)** – "See-the-flow." Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.

Nominal Specifications

Series	ID		OD		Working Pressure (PSI)		Vacuum Rating (in. Hg)		Min. Bending Radius (in.) @ 68°F	Standard Length (ft.)	Weight (lbs/ft)
	(in.)	(mm)	(in.)	(mm)	68°F	104°F	68°F	104°F			
LK/LKC400	4	101.6	4.57	114.8	8	4	13	7	3	100/50	0.85
LKC500	5	128.0	5.55	141.0	7	3	10	6	5	100	0.93
LK/LKC600	6	152.4	6.63	168.3	6	3	7	5	6	100/50	1.34
LKC700	7	177.8	7.56	192.0	4	2	6	4	7	50	1.53
LK/LKC800	8	203.2	8.63	219.3	4	2	5	3	8	50/25	2.00

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

*Actual service temperature range is application dependent.

RoHS⁽⁰⁶⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



"COLD-FLEX"
MATERIALS



HIGH-TEMP
MATERIALS



STATIC
DISSIPATIVE



WATER

FLEXAIR™



Thermo-Duct™ TMOD Series

Thermoplastic Rubber Ducting/ Material Handling Hose

General Applications:

- Chemical vapor exhausting†
- Ducting, ventilation & fume removal
- Dust control
- High temperature air handling

Construction: Thermoplastic rubber (TPR) hose with steel wire helix.

Service Temperature: -60°F (-51°C) to 275°F (135°C);
intermittent service to 300°F (149°C)*

Features and Advantages:

- **Thermoplastic Rubber (TPR) Material** – Combines the chemical resistant properties of PVC with the flexibility of rubber to handle a wide variety of ducting or light material handling applications, especially ones when high cycle strength is required.
- **Chemical Resistant** – Excellent resistance to a wide variety of industrial chemicals.†
- **Steel Wire Helix** – Highly durable steel wire provides strength and allows for use at higher temperatures without risk of hose deformation. Wire can be grounded for static dissipation. ⚡
- **"Cold-Flex" Material** – Hose remains flexible in sub-zero temperatures.

Nominal Specifications

Series	ID (in.)	ID (mm)	Min. Bend Radius (in.) @ 68° F	Max. W.P. (PSI) @ 68° F	Vacuum Rating (in Hg) @ 68° F	Length/Ctn. (ft.)	Weight (lbs./ft.)
TMOD200	2	50.8	1	17	24	25	0.22
TMOD250	2 1/2	63.5	1.3	15	24	25	0.40
TMOD300	3	76.2	1.5	14	24	25	0.55
TMOD400	4	101.6	2	11	24	25	0.75
TMOD500	5	127.0	2.5	10	15	25	0.85
TMOD600	6	152.4	3	9	9	25	0.94
TMOD800	8	203.2	4	8	8	25	1.62
TMOD1000	10	254.0	5	7	6	25	1.86
TMOD1200	12	304.8	6	6	4	25	2.05
TMOD1400	14	355.6	7	5	3	25	2.35

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

*Actual service temperature range is application dependent.

⚡ **CAUTION:** This product is designed to dissipate static electricity when the metal wire is physically extracted and securely connected to ground, through the fitting or by other means.

† **CAUTION:** Before using any hose, the user is responsible for determining it's suitability for the intended application. Therefore, the user assumes all risk and responsibility for determining the suitability of any hose for handling any chemical or chemicals.

RoHS(06)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

KFDHCA0417

Neo-Duct® HTNP2 Series


Neoprene Coated, Two-Ply Polyester Ducting Hose

General Applications:

- Ducting, ventilation & fume removal
- Dust control
- Material handling – light duty
- High temperature air handling

Construction: Neoprene coated, two-ply polyester hose with steel wire helix.

Service Temperature: -65°F (-54°C) to 250°F (127°C)*

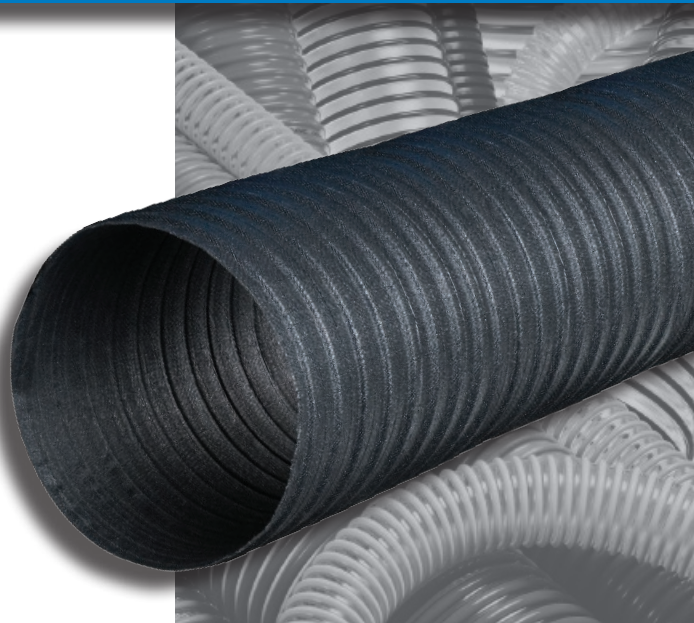

Features and Advantages:

- **Neoprene Coated Polyester Material** – Heat and flame resistant tube well suited for air handling and fume control. More durable than double-ply cotton hoses, exhibiting good crush resistance and tensile strength.
- **Steel Wire Helix** – Highly durable steel wire provides strength and allows for use at higher temperatures without risk of hose deformation. Wire can be grounded for static dissipation. ⚡
- **Flame Retardant** – Manufactured to meet UL94V-O rating of the Standard for Safety of Flammability of Plastic Material in Devices and Appliances Testing.
- **"Cold-Flex" Material** – Hose remains flexible in sub-zero temperatures.

Nominal Specifications

Series	ID (in.)	ID (mm)	Min. Bend Radius (in.) @ 68° F	Max. W.P. (PSI) @ 68° F	Length/ Ctn. (ft.)	Weight (lbs./ft.)
HTNP2-150	1 1/2	38.1	2.6	32	25	0.16
HTNP2-200	2	50.8	3.5	30	25	0.22
HTNP2-250	2 1/2	63.5	4	28	25	0.28
HTNP2-300	3	76.2	5	25	25	0.33
HTNP2-350	3 1/2	88.9	5.7	24	25	0.42
HTNP2-400	4	101.6	6.5	23	25	0.48
HTNP2-500	5	127.0	7.5	22	25	0.61
HTNP2-600	6	152.4	9	21	25	0.70
HTNP2-700	7	177.8	9.5	20	25	0.92
HTNP2-800	8	203.2	10	19	25	1.04
HTNP2-1000	10	254.0	11	18	25	1.36
HTNP2-1200	12	304.8	13.5	17	25	1.85
HTNP2-1400	14	355.6	15.5	16	25	2.10
HTNP2-1600	16	406.4	18.5	15	25	2.40
HTNP2-1800	18	457.2	22	6	25	2.70
HTNP2-2000	20	508.0	24	4	25	3.00

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

***Actual service temperature range is application dependent**

⚡CAUTION: This product is designed to dissipate static electricity when the metal wire is physically extracted and securely connected to ground, through the fitting or by other means.

RoHS⁽⁰⁶⁾ , UL94V-O⁽⁰⁷⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



"COLD-FLEX"
MATERIALS




HIGH-TEMP
MATERIALS



STATIC
DISSIPATIVE

FLEXAIR™

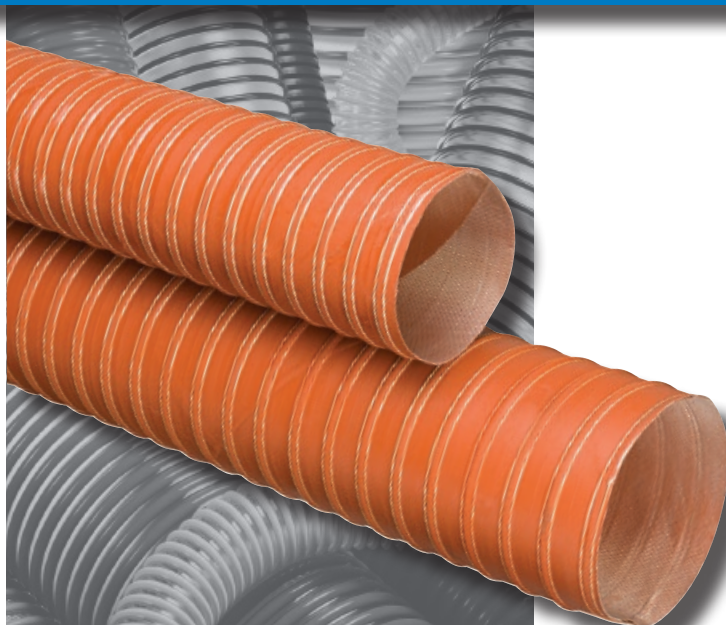

SIL-Duct® SDH Series

**Silicone Coated, Two-Ply,
Woven Fiberglass Ducting Hose
With Chemically Treated
Steel Wire Helix**

General Applications:

- Ducting, ventilation & fume removal
- Dust control
- High temperature air handling
- Plastic processing dryers

Construction: Silicone coated, two-ply, woven fiberglass hose with steel wire helix and double continuous filament, silicone treated fiberglass cord.

Service Temperature: -80°F (-62°C) to 500°F (260°C); intermittent service to 600°F (316°C)*

Features and Advantages:

- **Silicone Coated, Woven Fiberglass Material** – Vulcanized for high durability and long service life. Well suited for air handling and fume control at both high and low temperatures extremes.
- **Smooth Air Flow with Minimum Friction Loss** – Internal ply and narrow pitch helix allow for a tight bend radius while still maintaining smooth air flow. Other similar hoses create restricted inside diameter in bends or axial compression.
- **Easy Installation** – Light weight and highly kink resistant construction allows for easy installation in tight spaces requiring multiple bends.
- **Steel Wire Helix** – Highly durable steel wire provides strength and allows for use at higher temperatures without risk of hose deformation. Wire can be grounded for static dissipation. ⚡

Nominal Specifications

Series	ID (in.)	ID (mm)	Min. Bend Radius (in.) @ 68° F	Wall Thickness (in.)	Max W.P. (PSI) @ 68° F	Vacuum Rating (in Hg) @ 68° F	Max Leakage CFM	Cuff Length (in.)	Length/Ctn. (ft.)	Weight (lbs./ft.)
SDH-100	1	25.4	1	0.07	60	Full	0.015	1 1/2	12	0.13
SDH-125	1 1/4	31.7	1.3	0.07	60	Full	0.015	1 1/2	12	0.16
SDH-150	1 1/2	38.1	1.5	0.07	55	26	0.015	1 1/2	12	0.19
SDH-175	1 3/4	44.5	1.8	0.07	55	26	0.020	1 1/2	12	0.22
SDH-200	2	50.8	2	0.07	50	20	0.020	1 1/2	12	0.25
SDH-250	2 1/2	63.5	2.5	0.07	45	16	0.025	1 1/2	12	0.31
SDH-300	3	76.2	3	0.07	45	14	0.030	1 1/2	12	0.39
NEW SDH-350	3 1/2	88.9	3.5	0.07	40	12	0.035	1 1/2	12	0.45
SDH-400	4	101.6	4	0.08	40	10	0.040	1 1/2	12	0.53
NEW SDH-450	4 1/2	114.3	4.5	0.08	35	8	0.050	1 1/2	12	0.60
SDH-500	5	107.0	5	0.08	35	8	0.060	2	12	0.67
SDH-600	6	152.4	6	0.09	30	6	0.100	2	12	0.81
SDH-800	8	203.2	8	0.11	15	6	0.150	2	12	1.11

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 26.

***Actual service temperature range is application dependent**

⚡CAUTION: This product is designed to dissipate static electricity when the metal wire is physically extracted and securely connected to ground, through the fitting or by other means.

RoHS(06)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

KFDHCA0417

Extendo-Duct® EDB™ Series EDW™ Series Extendible/Contractible, Self-Supporting Polypropylene Ducting Hose

General Applications:

- Air conditioning, spot cooling and heating systems
- Clean room and chemical fume exhaust
- Ducting, ventilation & fume removal
- Dust control
- OEM equipment applications
- Not for liquid handling use

Construction: Extendable/contractible polypropylene tube with steel wire helix.

Service Temperature: -4°F (-20°C) to 175°F (80°C)*

Features and Advantages:

- **Polypropylene Tube** – Inert polypropylene material produces no off-gassing and is resistant to a wide variety of chemical fumes, making it ideal for a wide variety of clean room and fume exhaust applications.
- **Extendible and Contractible** – Hose extends easily and can be contracted to approximately one-third of full extended length for storage, shipping or where the full length is not required.



 **MADE IN THE
USA**

- **Self-supporting** – Unique construction allows the hose to maintain its shape and support itself once positioned.
- **Steel Wire Helix** – Steel wire provides strength and allows for use at higher temperatures without risk of hose deformation. Well suited for high cycle applications. ✓
- **Interlock Construction** – Two sections can be joined by twisting them together. No mender required.



Nominal Specifications

Series		ID		OD		Working Pressure (PSI)		Vacuum Rating (in. Hg)		Min. Bending Radius (in.) @ 68°F	Length/Ctn. (ft.)	Approx. Contracted Shipping Length Hose Only (in.)	Weight (lbs./ft.) Hose Only
Brown	White	(in.)	(mm)	(in.)	(mm)	68°F	104°F	68°F	104°F				
EDB-150	EDW-150	1 1/2	37.5	1.63	41.5	20	7	22	14	1.2	20	85	0.10
EDB-200	EDW-200	2	53.5	2.26	57.5	13	6	21	12	1.6	20	82	0.12
EDB-250	EDW-250	2 1/2	67.0	2.80	71.0	10	5	19	10	2.0	20	72	0.16
EDB-300	EDW-300	3	76.5	3.17	80.5	10	5	18	10	2.3	20	72	0.18
EDB-400	EDW-400	4	102.0	4.17	106.0	8	4	13	7	3.0	20	70	0.23
EDB-500	EDW-500	5	127.5	5.18	131.5	7	3	10	6	4.3	20	70	0.27
EDB-600	EDW-600	6	155.0	6.26	159.0	6	3	7	5	5.1	20	70	0.33
EDB-800	EDW-800	8	202.0	8.19	208.0	4	2	5	3	7.0	20	70	0.68
EDB-1000	EDW-1000	10	253.0	10.22	259.5	3	1	4	2	9.0	20	70	0.83
EDB-1200	EDW-1200	12	302.0	12.13	308.0	2	1	3	1	11.0	20	70	0.91

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

*Actual service temperature range is application dependent

✓ **CAUTION:** This product is designed to dissipate static electricity when the metal wire is physically extracted and securely connected to ground, through the fitting or by other means.


Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



**CMCB™
Series Cuff**



**CMCW™
Series Cuff**




Custom Molded Cuffs †

Standard Stock Colors		ID (in.)	L Total Length (in.)	A Cuff Length Outside (in.)	B Cuff Length Outside (in.)	T Thickness (mm)
Brown	White					
CMCB-150	CMCW-150	1 1/2	2.76	1.38	1.57	3
CMCB-200	CMCW-200	2	2.76	1.38	1.57	3
CMCB-250	CMCW-250	2 1/2	2.76	1.38	1.57	3
CMCB-300	CMCW-300	3	3.15	1.57	1.77	3
CMCB-400	CMCW-400	4	3.54	1.77	1.97	3
CMCB-500	CMCW-500	5	3.74	1.77	1.93	3.5
CMCB-600	CMCW-600	6	3.94	1.77	2.17	3
CMCB-800	CMCW-800	8	3.94	1.89	2.05	5
CMCB-1000	CMCW-1000	10	5.04	2.52	2.52	5
CMCB-1200	CMCW-1200	12	5.04	2.52	2.52	5

† Molded cuffs are an additional purchase option. Material: EPT Rubber.

Extendo-Duct® Selection and Performance

The chart below provides the means by which friction losses resulting from airflow through any length of a given diameter of Extendo-Duct® hose can be calculated. The chart can also be used to aid in selecting the proper diameter Extendo-Duct® for use in an application, or for calculating the volume of air which will be delivered at the end of the hose. *It should be noted that this chart is the result of laboratory tests performed on fully-extended lengths of Extendo-Duct®.*

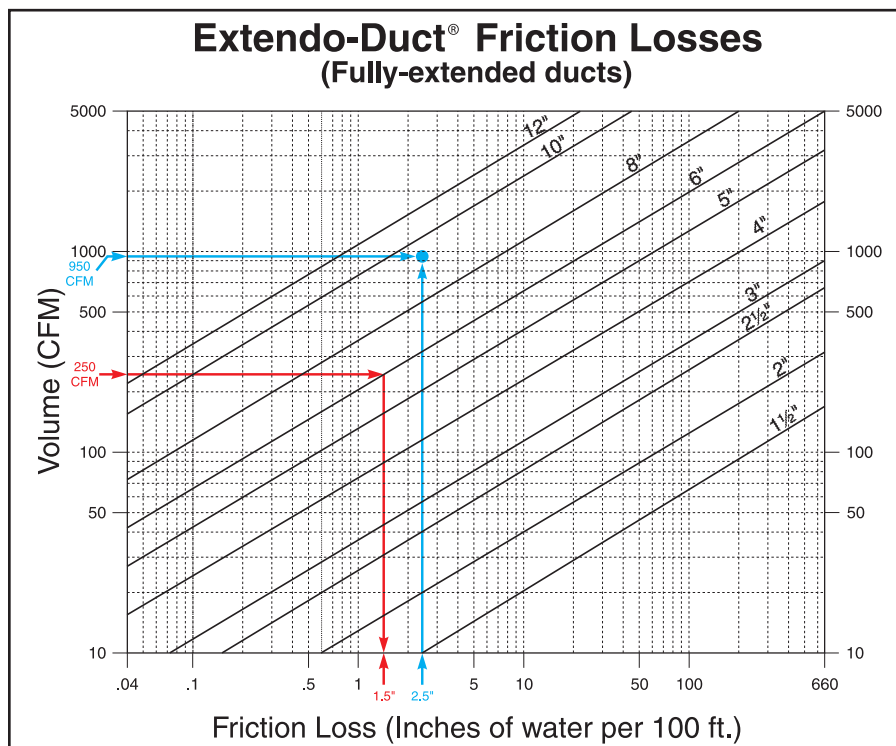

Calculating friction loss

The application requires 250 CFM and a 20 foot run of Extendo-Duct®. What would be the friction loss through a 6" diameter hose?

Draw a horizontal line at the desired CFM. Draw a vertical line downward from the point at which this horizontal line intersects the diagonal line for the desired hose diameter. Read the friction loss per 100 feet. Multiply this value by the hose length divided by 100.

In our example (shown in red on the graph): the vertical line drawn at the point of intersection of the horizontal 250 CFM line and the 6" dia. hose line shows 1.5" friction loss for 100 ft. of hose. Since the length is 20 ft., multiply the friction loss for 100 ft. by .20. The result is 0.3" friction loss.

Selecting the proper size Extendo-Duct®

A 60 ft. length of Extendo-Duct® is required to supply 950 CFM. The fan is capable of providing 1.5" SP. What size hose should be selected?

Draw a horizontal line at the desired CFM. Draw a vertical line upward from the appropriate spot on the horizontal axis. The proper hose selection is shown by the slanted line immediately to the left of the point at which the horizontal and vertical lines intersect.

In our example (shown in blue): 1.5" SP/ (60/100) = 2.5". The vertical line drawn at 2.5" intersects the horizontal line drawn at 950 CFM between the 8" and 10" hose lines. The 10" hose should be used.

Rough Bore (unlined) Interlocked Metal Hose

HTS4000 Series



HTG4000 Series

Applications:

- Abrasive material handling
- BOP (Blow out Protection) for hydraulic, cryogenic and other high pressure hoses
- Bulk truck and railcar unloading
- Dry bulk transfer
- Fly ash and soda handling
- Grain handling
- Transfer of high temperature air, gasses and materials
- Protective armor/shielding for hoses
- Truck tailpipe exhaust
- Vacuum trucks and equipment

Features and Advantages:

- **Conductive** – prevents the build-up of static electricity eliminating the risk of “hose arcing”.
- **Flexible** – corrugations allow for greater flexibility than lined metal hose.
- **Abrasion Resistant and Durable** – steel construction resists damage from abrasive and damaging materials.

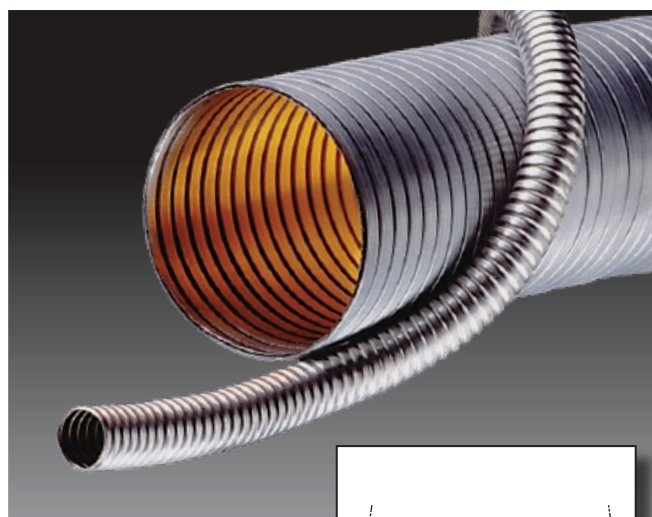

Construction: A single strip of galvanized or 304 stainless steel wound into a interlocked metal hose, with or without packing materials.

Max Service Temperature: Galvanized: to 750°F (399°C), Stainless: to 1,500°F (816°C)

- **Corrosion Resistant (Stainless Only)** – 304 stainless version resists corrosion making it resistant to the elements.
- **Heat Resistant** – can withstand very high temperatures allowing for the transfer of hot materials.
- **Full Vacuum**

Nominal Specifications

Weight	Series	Material	Wall Thickness (in.)	Max Service Temp (°F)
Extra Light Weight	HTG4100	Galvanized Steel	0.0110	750
	HTS4100	304 Stainless Steel	0.0110	1,500
Light Weight	HTG4150	Galvanized Steel	0.0150	750
	HTS4150	304 Stainless Steel	0.0150	1,500
Medium Weight	HTG4200	Galvanized Steel	0.0185	750
	HTS4200	304 Stainless Steel	0.0185	1,500

Please refer to the back page for the location of your nearest warehouse for availability of products/sizes shown.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



Rough Bore (unlined) Interlocked Metal Hose

HTS4000 Series

HTG4000 Series

Nominal Specifications

Hose Size I.D. (in.)	HTG4100 HTS4100		HTG4150 HTS4150		HTG4200 HTS4200	
	Extra Light Weight		Light Weight		Med. Weight	
	Min. Inside Bend Radius (in.)	Weight (lbs./ft.)	Min. Inside Bend Radius (in.)	Weight (lbs./ft.)	Min. Inside Bend Radius (in.)	Weight (lbs./ft.)
1 3/8	4.25	0.45	5.00	0.60	—	—
1 1/2	4.75	0.50	5.50	0.70	6.00	1.00
1 5/8	5.00	0.54	5.75	0.75	6.50	1.05
1 3/4	5.25	0.58	6.00	0.80	7.00	1.10
1 7/8	5.50	0.62	6.25	0.85	7.50	1.20
2	6.00	0.70	6.50	0.90	8.00	1.30
2 1/4	6.75	0.75	7.25	1.10	8.50	1.45
2 1/2	7.50	0.80	8.00	1.20	9.00	1.60
2 3/4	8.75	0.90	8.25	1.30	10.00	1.80
3	10.00	1.00	10.50	1.40	11.00	2.00
3 1/4	10.50	1.10	11.25	1.50	12.00	2.10
3 1/2	11.00	1.20	12.00	1.60	12.50	2.30
4	12.50	1.40	13.50	1.80	14.50	2.60
4 1/2	14.00	1.50	15.00	2.00	16.00	2.90
5	15.00	1.70	16.00	2.30	17.00	3.00
5 1/4	16.00	1.80	17.25	2.40	18.00	3.15
5 1/2	17.50	1.90	18.50	2.50	19.50	3.30
6	20.00	2.00	21.00	2.70	22.00	3.60
6 1/4	20.50	2.10	21.50	2.80	23.00	3.75
6 1/2	21.00	2.20	22.00	2.95	23.50	3.90
7	22.00	2.40	23.00	3.20	25.00	4.20
7 1/4	23.00	2.50	23.75	3.30	26.00	4.30
7 1/2	24.00	2.60	24.50	3.40	26.50	4.40
8	25.00	2.70	26.00	3.60	28.00	4.70
9	—	—	28.25	4.05	30.50	5.30
9 1/2	—	—	29.50	4.25	31.50	5.60
10	—	—	30.50	4.50	32.50	5.90
11	—	—	33.00	5.00	35.50	6.50
11 1/4	—	—	33.75	5.10	36.00	6.60
11 1/2	—	—	34.50	5.20	37.00	6.75
12	—	—	36.00	5.40	38.00	7.00
14	—	—	50.00	6.30	53.00	8.10
16	—	—	—	—	60.50	9.20




**Bridge Clamp for Ducting Hoses
300 Stainless Worm Gear Band
(For Tigerflex™ Counterclockwise Spiral Hoses)**

Part Number	Size (in.)	Size Range (in.)	Weight Each (lbs.)	Standard Carton
DCLPL250	2 1/2	2 3/8 - 2 3/4	0.086	200
DCLPL300	3	2 7/8 - 3 3/8	0.093	200
DCLPL400	4	3 1/2 - 4 1/2	0.130	200
DCLPL500	5	4 3/8 - 5 1/4	0.143	200
DCLPL600	6	5 1/4 - 6 1/4	0.167	200
DCLPL700	7	6 1/4 - 7 1/4	0.175	200
DCLPL800	8	7 3/8 - 8 3/8	0.207	100
DCLPL1000	10	9 1/4 - 10 1/4	0.242	100
DCLPL1200	12	11 1/4 - 12 1/4	0.284	100



**Bridge Clamp for Ducting Hoses
300 Stainless Worm Gear Band
(For Flexair™ Clockwise Spiral Hoses)**


Part Number	Size (in.)	Size Range (in.)	Weight Each (lbs.)	Standard Carton
DCLPR250	2 1/2	2 3/8 - 2 3/4	0.086	200
DCLPR300	3	2 7/8 - 3 3/8	0.093	200
DCLPR400	4	3 1/2 - 4 1/2	0.130	200
DCLPR500	5	4 3/8 - 5 1/4	0.143	200
DCLPR600	6	5 1/4 - 6 1/4	0.167	200
DCLPR700	7	6 1/4 - 7 1/4	0.175	200
DCLPR800	8	7 3/8 - 8 3/8	0.207	100
DCLPR1000	10	9 1/4 - 10 1/4	0.242	100
DCLPR1200	12	11 1/4 - 12 1/4	0.284	100

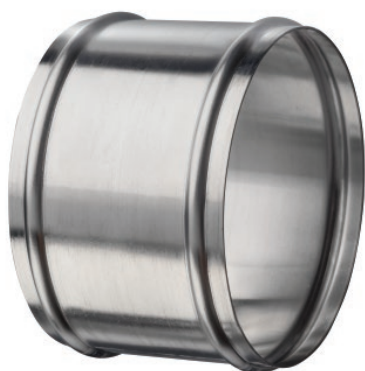

NEW

**Aluminum Ducting Hose Menders
(For URE-CL, URE-BK, UREH-CL, VID-CL,
and TMOD Series)**

Part Number	Size (in.)	Weight Each (lbs.)
DHM-AL600	6	0.28
DHM-AL800	8	0.38
DHM-AL1000	10	0.49
DHM-AL1200	12	0.60

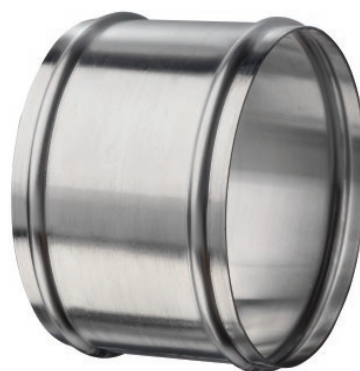

NEW

**Stainless Steel Ducting Hose Menders
(For URE-CL, URE-BK, UREH-CL, VID-CL,
and TMOD Series)**

Part Number	Size (in.)	Weight Each (lbs.)
DHM-SS600	6	0.40
DHM-SS800	8	0.54
DHM-SS1000	10	0.68
DHM-SS1200	12	0.76

Note: Ducting menders to be used in conjunction with two bridge clamps.

Accessories Compatibility Chart

G = Good - = Not Suggested

Series	Clamp		Coupling	
	DCLPR	DCLPL	DHM-AL	DHM-SS
CG	-	G	-	-
EDB/EDW	-	G	-	-
GT/GTG	-	G	-	-
GTF/GTFE	-	G	-	-
HTNP2	G	-	-	-
LK/LKC	-	G	-	-
SDH	*	*	-	-
TMOD	G	-	G	G
URE-BK	G	-	G	G
URE-CL	G	-	G	G
UREH-CL	G	-	G	G
UV1/UEVE	-	G	-	-
UV2	-	†	-	-
UVF	-	G	-	-
VID-CL	G	-	G	G

* For SDH series use of WGC series clamps suggested

† For UV2 use of SDBC series clamps suggested



SDBC series
SDB-SS series



WGC-CS series
WGC-SS series

For information on SDBC & WGC Clamps refer to standard KOA Coupling catalogs.

Cuffed Ends



- Available on HTNP2, URE-BK, URE-CL, UREH-CL and VID-CL Series.
- Provides a smooth surface without wire helix interference for easy installation and a tighter seal.
- Call for pricing and availability. Minimum order quantities may apply.

Compliance Footnotes for Flexair™ Catalog Products

- (01) 3A – Material approved by 3-A Sanitary Standards, Inc. for multi-use plastic materials, number: 20-25, as product contact surfaces in equipment for production, processing and handling of milk and milk products.
- (02) BSE/TSE – The majority of the raw materials used in our formulations are not manufactured or derived from materials of animal origin. Nor do our products come into contact with materials of animal origin during processing. Our suppliers of raw materials have assured us their compounds exceed the relevant European Guidance on minimizing the Risk of Transmitting Animal Spongiform Encephalopathy Agents Via Human and Veterinary Medical Products.
- (03) FDA – Material conforms to CFR title 21, parts 170-199.
- (04) MSHA – Hose approved by the United States Department of Labor's Mine Safety and Health Administration as having met Part 18, Title 30 CFR, and the Interim Fire Criteria for Acceptance of Products Taken into Underground Mines as water transfer hose.
- (05) Phthalate Free – Manufactured from all phthalate free materials.
- (06) RoHS – The product complies with the requirements of the EU directive 2002/95/EC which is on the restriction of the use of certain hazardous substances in electrical and electronic equipment.
- (07) UL94V-0 – Meets UL94V-0 rating of the standard for safety of Flammability of Plastic Material in Devices and Appliances Testing.
- (08) USDA – Hose approved by the US Department of Agriculture for use in federally inspected meat and poultry plants.

Chemical Resistance Guide Warning

The Chemical Resistance Guides shown on the following page is intended for general guidance only. The information contained therein is based upon tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No warranty is expressed or implied, as specific application parameters, such as temperature, pressure and chemical concentrations vary widely. Furthermore, use of these hoses for handling multiple chemical products, either singly or as a mixture, may introduce uncontrollable factors relating to chemical resistance.

Before using any hose, the user is responsible for determining the suitability of the hose for the intended application. Therefore, the user assumes all risk and responsibility for determining the suitability of any hose for handling any chemical or chemicals.

Chemical Resistance Guide

Key: 1- GOOD RESISTANCE 2 - FAIR RESISTANCE 3 - POOR RESISTANCE - NO DATA

Transferred Material (@ 68°F)	Hose Material Construction						
	Neoprene	PP	PVC	Silicone	TPR	TPU (Ester)	TPU (Ether)
Acetic Acid (30%)	2	1	1	1	1	3	-
Acetone	2	1	3	-	1	2	3
Acetylene	2	-	1	1	-	1	-
Aniline (Aminobenzene)	3	1	2	-	1	3	-
Benzene	3	3	3	3	3	2	3
Boric Acid	3	1	1	1	1	3	1
Bromine	3	3	3	3	-	3	-
Butane	1	-	-	3	1	1	-
Calcium Chloride	-	1	1	1	1	2	1
Carbon Dioxide	1	-	-	1	1	-	1
Carbon Monoxide	1	-	1	1	1	1	1
Carbon Tetrachloride	3	3	3	3	-	2	3
Chlorine, Dry	2	3	2	-	3	3	-
Chlorine, Wet	3	3	3	-	3	3	-
Chloroform (Trichloromethane)	3	-	3	3	3	3	-
Chromic Acid (25%)	3	3	-	2	-	3	3
Citric Acid	1	1	1	1	1	3	1
Diethylene Glycol	1	-	1	1	-	-	-
Ethyl Alcohol (Ethanol)	1	1	1	1	1	-	2
Ethyl Chloride	2	-	3	3	3	3	-
Ethylene Glycol	1	1	1	1	1	1	1
Formaldehyde	-	2	3	-	-	-	-
Formic Acid (10%)	-	1	-	1	1	3	3
Glycerine	1	1	1	1	1	1	1
Heptane	3	-	2	3	3	1	-
Hexane	-	-	2	3	2	-	-
Hydrogen	1	-	1	-	1	1	-
Isobutyl Alcohol	1	-	1	1	-	-	1
Isooctane	-	-	1	-	-	1	-
Isopropyl Alcohol	-	-	1	-	-	-	1
Kerosene	-	-	3	3	3	1	1
Methyl Ethyl Ketone (MEK)	3	2	3	3	1	2	2
Methane	1	-	1	3	-	-	-
Methyl Alcohol	1	1	2	1	-	2	-
Methylene Chloride	3	2	3	3	3	3	-
Naptha	-	-	3	3	2	1	2
Napthalene	3	3	3	3	2	-	1
Natural Gas	1	-	-	1	-	1	-
Nitric Acid (10%)	1	2	1	1	1	3	-
Nitrogen	-	-	-	-	-	-	-
Nitrous Oxide	-	-	1	-	-	1	-
Oleic Acid	3	2	1	3	1	3	1
Oleum	3	-	3	-	3	3	-
Ozone	2	-	2	1	1	-	1
Paraffin	-	-	1	-	-	-	1
Perchloroethylene	3	3	3	2	3	-	-
Propane Gas	-	-	1	-	3	1	-
Salt/Sea Water	1	1	1	1	1	2	1
Sodium Hydroxide (10%)	1	1	2	-	1	2	-
Sodium Hydroxide (50%)	1	1	3	-	1	3	-
Sodium Hypochlorite (10%)	-	1	-	-	1	2	2
Sulfuric Acid (10%)	1	1	-	3	1	2	-
Sulfuric Acid (50%)	3	1	3	3	2	3	-
Tetrahydrofurane	3	3	3	-	1	3	-
Trichloroethylene	3	3	3	-	3	2	3
Turpentine	3	3	2	3	3	-	3
Urea	1	-	-	-	1	-	-
Vinegar	2	-	1	1	1	-	1
Xylene	3	3	3	3	3	-	3

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.