VARIOVAC
simpler faster better



Smart stacking of
product packaging

VARIOSTACK

VARIOSTACK S100


The VARIOSTACK S100 stacks product packages automatically, precisely, and evenly – at a rate of up to 150 packages per minute. Designed for seamless integration into thermoforming machines and tray sealers, the VARIOSTACK S100 optimizes the end of your production line. It reduces manual labor, increases process efficiency, and ensures a reliable, continuous packaging process.


Compact.
Precise.
Reliable.

- HIGH SPEED
- FLEXIBLE STACKING
- TOOL-FREE OPERATION
- PERFECT PRECISION
- USER-FRIENDLY
- HYGIENIC DESIGN

TECHNICAL INFORMATION

Stack speed:	up to 150 packages per minute
Line speed:	up to 20 cycles per minute
Max. package length:	250 mm
Max. package width:	200 mm
Max. stack height:	180 mm (standard)
Adjustable stack height:	up to 20 packages
Control platform:	B&R HMI panel
Construction:	Stainless steel, hygienic design
Line conveyor:	modular link belt with 25 mm pitch
Machine configuration:	Inline or 90° configuration
Machine dimensions:	approx. 1,750 x 900 x 1,350 mm (L x W x H)
Machine weight:	300 kg

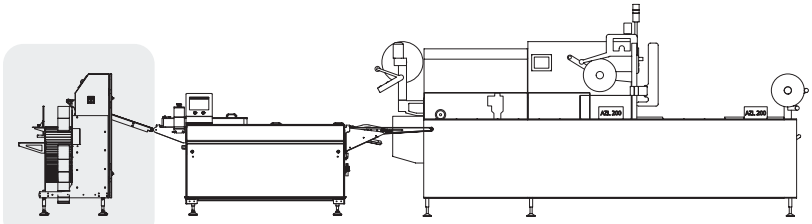

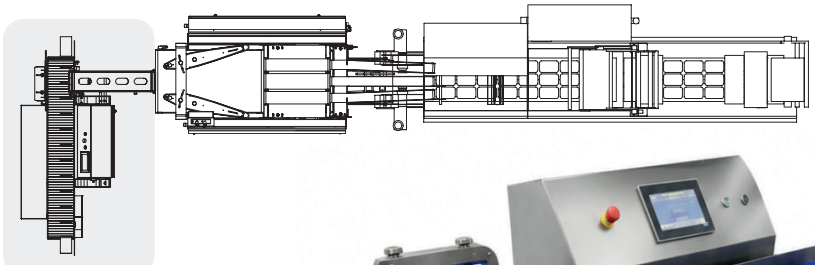



Stacks up to 150 packages per minute



Stepped belts ensure perfectly aligned stacks



Tool-free belt change



STACKS UP TO 150 PACKAGES PER MINUTE

FOOD · NONFOOD · MEDICAL

More Information. More VARIOVAC.
www.variovac.de

VARIOVAC PS SystemPack GmbH
Ernst-Litfaß-Str. 3 and 5
19246 Zarrentin am Schaalsee

Phone +49 38851-823 0
sales@variovac.de · www.variovac.de