VARIOVAC
simpler faster better




Crossweb labeler on
thermoforming machines

VARIOLABEL 2.0

VARIOLABEL 2.0

A label can show the logo or an image of a company or product and contain additional information such as ingredients, weight, best-before date, price and more.
The VARIOLABEL 2.0 consists of the labeling station, a control cabinet and a label transport device, which is mounted on a longitudinal sliding unit and ensures the precise positioning of labels on packaging of different sizes (2 to 6 rows). The control cabinet is housed in a corrosion-resistant stainless steel casing and a light barrier warns of the end of the label roll. Important program data, such as the width of the film or the number of labels, is entered via a 7-inch touch panel with color display and can be called up immediately. Software for label design is also available. The VARIOLABEL 2.0 is the ideal complement to to our VARIOVAC Primus and Optimus thermoforming machines.




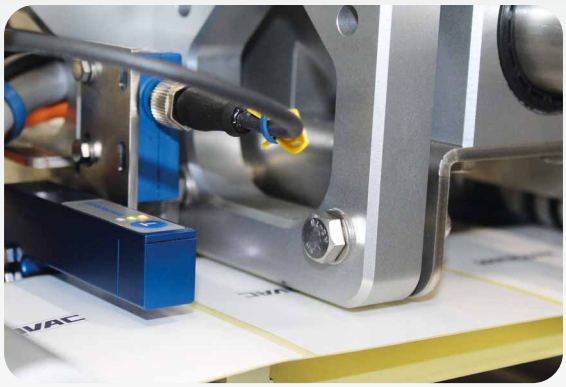

Product example label sensor

TECHNICAL DATA

Label material width:	30 - 150 mm (up to 200 mm)
Label length:	30 - 250 mm
Material:	paper / plastic
Air pressure:	6 bar (supply by machine)
Voltage:	230 V / 50 Hz (supply by machine)
Power:	2 kW (example OP + UP)
Dispenser speed:	up to 60 m/min
Longitudinal speed:	up to 40 m/min
Speed:	up to 10 strokes/min

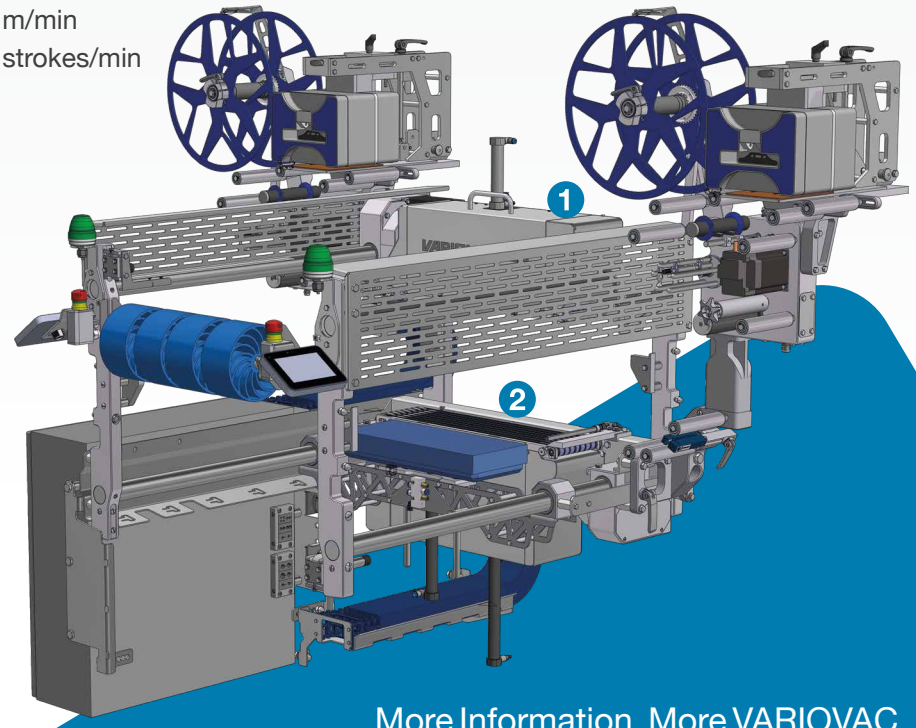

Perfect technology for economical operation!

LABELING OPTIONS

1. OP = Over product
2. UP = Under product
3. OP + UP = Combination
   (one cabinet for both labelers)

LABEL PRINTING SYSTEMS

- Thermotransfer printer
- Thermodirect printer
- Inkjet printer

More Information. More VARIOVAC.
www.variovac.de

VARIOVAC PS SystemPack GmbH
Ernst-Litfaß-Str. 3 and 5 · 19246 Zarrentin am Schaalsee

Phone +49 (0) 38851-823 0
sales@variovac.de · www.variovac.de