
ROTARIUS

Traysealer

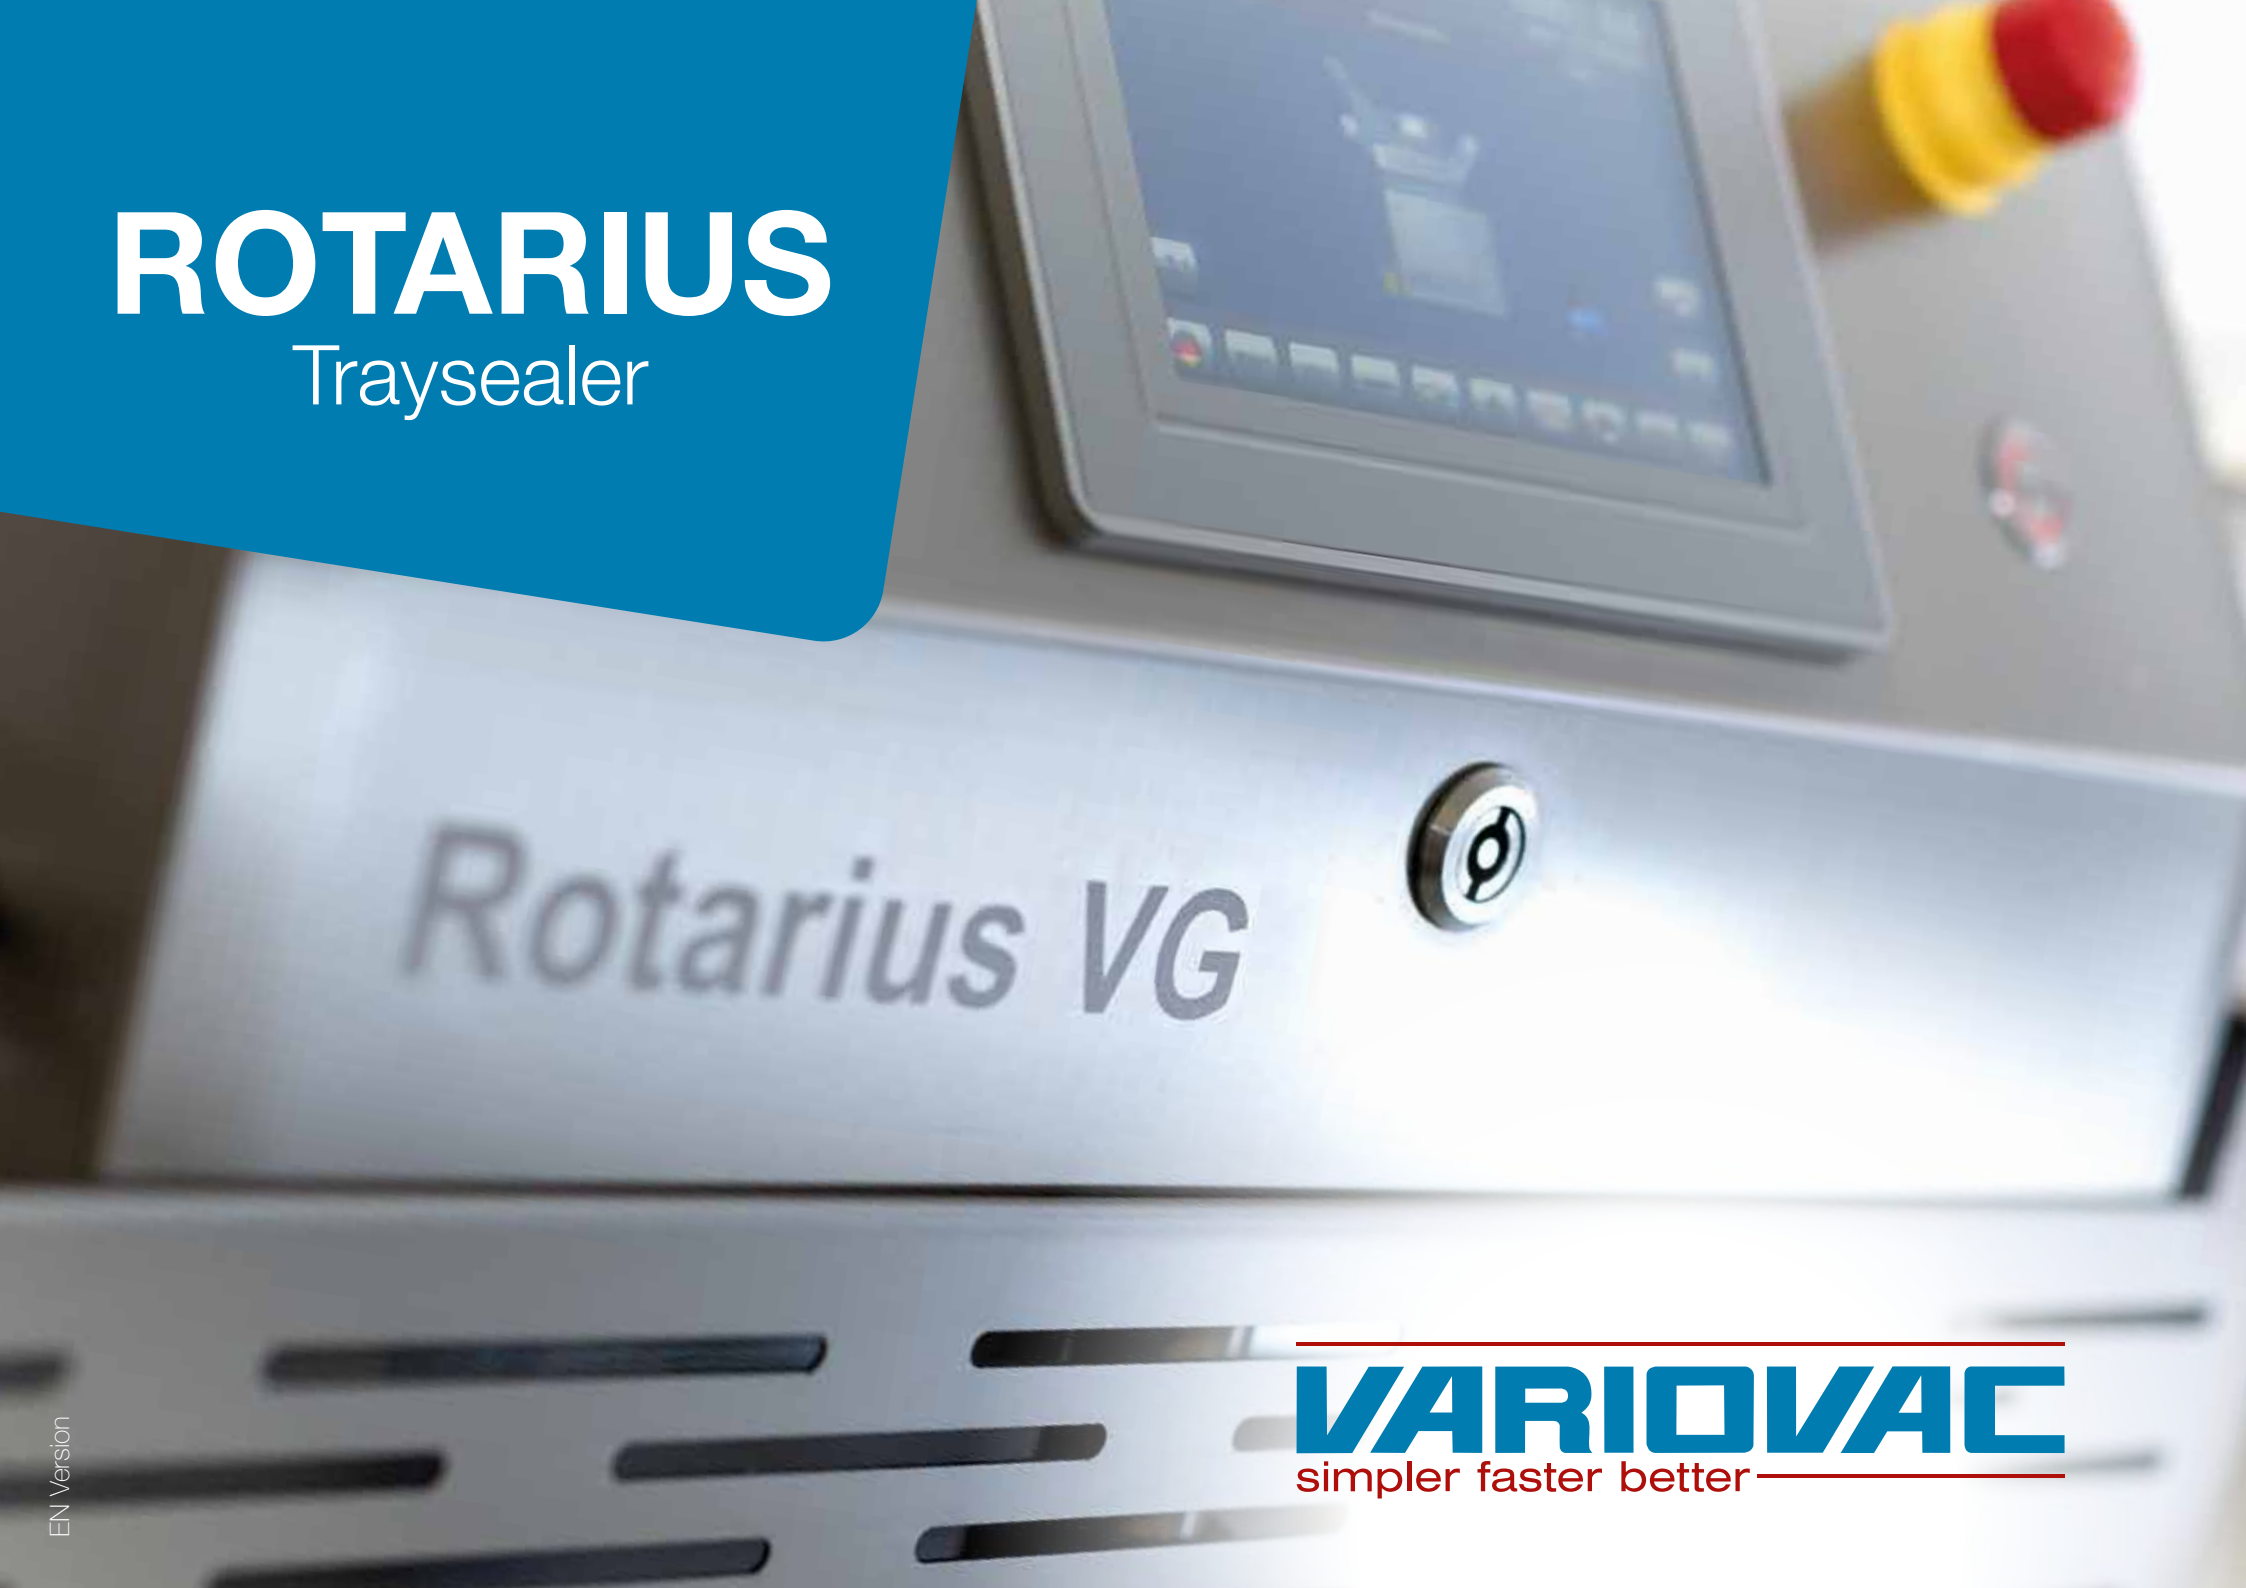

VARIOVAC
simpler faster better

EN Version

ROTARIUS

Efficiency and quality in a compact design.

THE SMART SOLUTION
FOR COST-EFFECTIVE AND
VERSATILE PACKAGING!

FOOD

NONFOOD

MEDICAL

The semi-automatic Rotarius tray sealer with its innovative dual-tool system is based on the practical rotary table principle: while trays are being vacuumed and gas-flushed in the rear section, the operator can remove finished packages and load new ones at the front. The result: no downtime, maximum productivity, and a continuous workflow.

Thanks to its compact design, the Rotarius requires only minimal floor space – ideal for small and medium-sized businesses seeking high pakkaging quality in limited production areas. Whether fresh, chilled, or frozen foods, ready-meal components, non-food items, or medical products, the Rotarius delivers perfect results.

With its flexible technology, it handles sealing, gas flushing, MAP, and skin applications with equal precision. Tool changes are fast and straightforward – completely without additional tools – ensuring maximum efficiency when switching between different packaging formats.



Rotating loading area



Integrated control panel



ROTARIUS

Technical Info




Salad in the loading area – sustainable packaging



Trays precisely matched to the product in color, shape and material

Whether menu trays, MAP trays, brine trays, Euro fresh boxes, or sugar-cane trays – our extensive product range guarantees first-class product presentation.
Hygiene, product protection, and shelf life are always our top priorities. Our experienced application engineers test various materials and combinations to determine the optimal solution for your individual requirements.

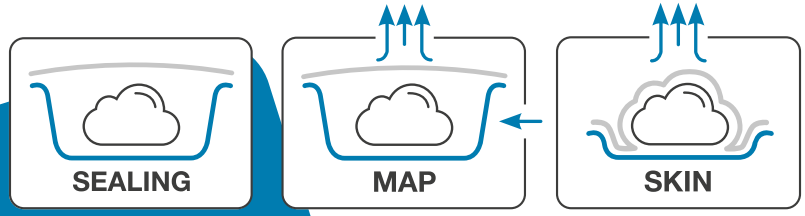


Film roll diameter:	up to dia. 300 mm (3" core)
Tray depth:	up to 100 mm
Product protrusion:	up to 25 mm
Tray depth for skin:	up to 40 mm
Packaging output:	4 – 8 cycles/min.
Packaging types:	Sealing, MAP, Skin, Gas flushing
Operating system:	IPC 7"-touchscreen
Compressed air:	min. 6 bar
Electrical voltage:	3 x 400 V N/PE, 50/60 Hz
Total weight:	450 kg
Space required:	1.6 m^2

Optional extensions

Liquid separator | Particulate filter | Print mark control for registered film
Die cart – for multiple formats | Die cart with preheating

Tray sizes (dimensions in mm)*

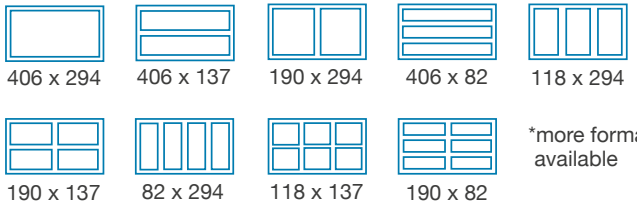

*more formats available



More Information. More VARIOVAC.

www.variovac.de

VARIOVAC PS SystemPack GmbH
Ernst-Litfaß-Str. 3 and 5
19246 Zarrentin am Schaalsee

Phone +49 38851-823 0
sales@variovac.de